



KATALOG / CATALOG

2024 - 2025

KABI A/S

Kokkedalsvej 29
DK-2970 Hoersholm
Denmark

CVR / VAT-nr: DK 46 80 98 15

E-mail: kabi@kabi.dk

Phone: +45 4576 0242

WWW.KABI.DK

Virksomheden KABI A/S blev grundlagt i 1937. Hovedkontoret er beliggende i Hørsholm 25 km nord for København.

KABI er leverandør af udstyr til smøring, dispensering og sprøjteteknologiske løsninger. Vi har vores egne produktions- og montagefaciliteter sammen med lager, logistik og kontorlokaler.

Vores produkter sælges gennem distributører og forhandlere i mere end 35 lande.

The company KABI A/S was founded in 1937. The head office is located in Hørsholm 25 km north of Copenhagen.

KABI is a supplier of equipment for lubrication, dispensing and spraying technology solutions. We have our own production and assembly plant together with warehouse, logistics and office facilities.

Our products are sold through distributors and dealers in more than 35 countries.



Super sprayers – Tryk sprayers – Tragte – Oliemål – Haner Super sprayers – Pressure sprayers – Funnels – Oil measures – Drum faucets	4
Tryksmørekander – Penselkander – Olieflasker Pressure oilers – Gluemasters – Oilers	34
Fedtpressere – Fedtsmøreapparater – Fedtpumper – Smørenipler Grease guns – Grease pump kits – Grease pumps – Grease nipples	39
Oliepumper – Olieanlæg – Membranpumper – Væskepumper Oil pumps – Oil systems – Diaphragm pumps – Fluid pumps	72
Diesel pumpesæt – AdBlue® pumpesæt – Manuelle pumper Diesel pump kits – AdBlue® pump kits – Hand pumps	115
Centralsmøring Central lubrication	129
Arbejdsknive – Industriknive – Fritidsknive – Sløjdknive Work knives – Industrial knives – Outdoor knives – Wood carving knives	137
Tankbåndmål – Boltsakse – Kablesakse – Sakse Dipping tapes – Bolt cutters – Cable cutters – Scissors	151
Hængelåse – Containerlåse – Dørlukker Padlocks – Container locks – Door closer	158

Super Sprayers
Tryksprayers
Tragte
Målebægre
Oliemål
Haner

Super Sprayers
Pressure Sprayers
Funnels
Measuring jugs
Oil measures
Drum faucets



Super sprayers – Sprayers med bruse og skum funktion – Chemo sprayers
Super sprayers – Sprayers with foam and shower function – Chemo sprayers

5

Tryk sprayers og tilbehør
Pressure sprayers and accessories

8

Skumpistol – Skumlanse sæt – Stænkeflasker
Foam gun – Foam cannon kit – Sifting bottles

11

Birchmeier kvalitets tryksprøjter til haven og industrien
Birchmeier quality pressure sprayers for garden and industry

13

Tragte – Målebægre – Oliemål – Haner
Funnels – Measuring jugs – Oil measures – Drum faucets

29

KABI fremstiller en komplet serie af Super-sprayers til forstøvning af stort set alle væsker. KABI Maxi sprayhovedet er testet og garanteret funktionsdygtig i 50000 pumpetryk ved alm. vand.

KABI Maxi sprayhovedet har justerbar dyse, og leveres i farverne rød/hvid, blå/hvid, grøn/hvid og hvid/hvid.

KABI manufactures a complete range of super sprayers for atomisation of almost all liquids. The KABI Maxi spray head has been tested and proved functional after 50000 strokes using ordinary water.

KABI Maxi spray head has an adjustable nozzle, and comes in red/white, blue/white, green/white and white/white.



Art.nr. / Art.#	Sprayhoved / Spray head	Indhold / Capacity	Beholderfarve / Container colour	Emb. / Quantity
KA500	KABI Maxi	0,50 ltr.	Natur / Natural	12
KA505	KABI Maxi	0,50 ltr.	Ass. Gul-hvid / Ass. Yellow-white	12
KA650	KABI Maxi (Reg. design)	0,65 ltr.	Ass. Gul-hvid / Ass. Yellow-white	12
KA650BLÅ	KABI Maxi (Reg. design)	0,65 ltr.	Blå / Blue	12
KA650GUL	KABI Maxi (Reg. design)	0,65 ltr.	Gul / Yellow	12
KA650GRØN	KABI Maxi (Reg. design)	0,65 ltr.	Grøn / Green	12
KA650HVID	KABI Maxi (Reg. design)	0,65 ltr.	Hvid / White	12
KA650RØD	KABI Maxi (Reg. design)	0,65 ltr.	Rød / Red	12
KA650NATUR	KABI Maxi (Reg. design)	0,65 ltr.	Natur / Natural	12
KA750	KABI Maxi	0,75 ltr.	Ass. Gul-hvid / Ass. Yellow-white	12
KA1005	KABI Maxi	1,00 ltr.	Ass. Gul-hvid / Ass. Yellow-white	12
KA10	KABI Maxi	1,00 ltr.	Natur / Natural	12



Tilbehør / Accessories

Art.nr. / Art.#	Sprayhoved - forlængerrør / Spray head - Extension tube	Længde / Length	Farve / Colour	Emb. / Quantity
KA501G	KABI Maxi Sprayhoved / Spray head		Grøn-hvid / Green-white	350
KA501R	KABI Maxi Sprayhoved / Spray head		Rød-hvid / Red-white	350
KA501B	KABI Maxi Sprayhoved / Spray head		Blå-hvid / Blue-white	350
KA501H	KABI Maxi Sprayhoved / Spray head		Hvid-hvid / White-white	350
KA108X	KABI Maxi Forlængerrør / Extension tube	160mm	Blå-hvid / Blue-white	12

NB: Standard beholderfarver som beskrevet. Vi leverer gerne kundetilpassede sprayers, evt. med eget præg.
Note: Standard container as described. We also offer custom sprayers with your own mark.

KABI fremstiller en komplet serie af sprayers med skumfunktion. Skumfunktionen finder anvendelse indenfor bl.a. storkøkkener, autopleje, sanitærforhold. Kombineret med vores serie af farvede beholdere, opnås et godt redskab i virksomheders interne miljøcertificering (ISO 14001).

KABI fremstiller en komplet serie af sprayers med Brusefunktion til stort set alle væsker. Brusefunktionen eliminerer aerosolerne, hvorved brugernes åndedræt friholdes for skadelige dampe. Endvidere er ergonomien, jvnf. den reducerede væskemodstand i dysen, forbedret med ca. 87%.

KABI manufactures a complete range of sprayers with foam nozzles. The foam function is functional in restaurant kitchens, auto care, sanitation etc. Combined with our series of coloured container a great tool for the company's internal environmental certification is obtained. (ISO 14001).

KABI manufactures a complete range of sprayers with shower nozzles for atomisation of practically all liquids. The shower function eliminates aerosols, and users respiratory are protected against noxious fumes. Furthermore the ergonomics is regulated. It reduces the liquid resistance in the nozzle – improved by approx. 87%.



Skumfunktion / Foam function

Art.nr. / Art.#	Sprayhoved / Spray head	Indhold / Capacity	Beholderfarve / Container colour	Emb. / Quantity
KAS500	KABI Maxi	0,50 ltr.	Natur / Natural	12
KAS505	KABI Maxi	0,50 ltr.	Ass. Gul-hvid / Ass. Yellow-white	12
KAS650	KABI Maxi (Reg. design)	0,65 ltr.	Ass. Gul-hvid / Ass. Yellow-white	12
KAS650BLÅ	KABI Maxi (Reg. design)	0,65 ltr.	Blå / Blue	12
KAS650GUL	KABI Maxi (Reg. design)	0,65 ltr.	Gul / Yellow	12
KAS650GRØN	KABI Maxi (Reg. design)	0,65 ltr.	Grøn / Green	12
KAS650HVID	KABI Maxi (Reg. design)	0,65 ltr.	Hvid / White	12
KAS650RØD	KABI Maxi (Reg. design)	0,65 ltr.	Rød / Red	12
KAS650NATUR	KABI Maxi (Reg. design)	0,65 ltr.	Natur / Natural	12
KAS650ASS.	KABI Maxi (Reg. design)	0,65 ltr.	Ass. 6 farver / Ass. 6 colours	12
KAS750	KABI Maxi	0,75 ltr.	Ass. Gul-hvid / Ass. Yellow-white	12
KAS1005	KABI Maxi	1,00 ltr.	Ass. Gul-hvid / Ass. Yellow-white	12
KAS10	KABI Maxi	1,00 ltr.	Natur / Natural	12

Brusefunktion / Shower function

Art.nr. / Art.#	Sprayhoved / Spray head	Indhold / Capacity	Beholderfarve / Container colour	Emb. / Quantity
KAB500	KABI Maxi	0,50 ltr.	Natur / Natural	12
KAB505	KABI Maxi	0,50 ltr.	Ass. Gul-hvid / Ass. Yellow-white	12
KAB650	KABI Maxi (Reg. design)	0,65 ltr.	Ass. Gul-hvid / Ass. Yellow-white	12
KAB650BLÅ	KABI Maxi (Reg. design)	0,65 ltr.	Blå / Blue	12
KAB650GUL	KABI Maxi (Reg. design)	0,65 ltr.	Gul / Yellow	12
KAB650GRØN	KABI Maxi (Reg. design)	0,65 ltr.	Grøn / Green	12
KAB650HVID	KABI Maxi (Reg. design)	0,65 ltr.	Hvid / White	12
KAB650RØD	KABI Maxi (Reg. design)	0,65 ltr.	Rød / Red	12
KAB650NATUR	KABI Maxi (Reg. design)	0,65 ltr.	Natur / Natural	12
KAB650ASS.	KABI Maxi (Reg. design)	0,65 ltr.	Ass. 6 farver / Ass. 6 colours	12
KAB750	KABI Maxi	0,75 ltr.	Ass. Gul-hvid / Ass. Yellow-white	12
KAB1005	KABI Maxi	1,00 ltr.	Ass. Gul-hvid / Ass. Yellow-white	12
KAB10	KABI Maxi	1,00 ltr.	Natur / Natural	12

Tilbehør / Accessories

Art.nr. / Art.#	Sprayhoved / Spray head	Farve / Colour	Emb. / Quantity
KAS501R	KABI Maxi Skumhoved / Foam head	Rød-hvid / Red-white	350
KAS501B	KABI Maxi Skumhoved / Foam head	Blå-hvid / Blue-white	350
KAS501H	KABI Maxi Skumhoved / Foam head	Hvid-hvid / White-white	350
KAB501R	KABI Maxi Brusehoved / Shower head	Rød-hvid / Red-white	350
KAB501B	KABI Maxi Brusehoved / Shower head	Blå-hvid / Blue-white	350
KAB501H	KABI Maxi Brusehoved / Shower head	Hvid-hvid / White-white	350

Art.nr. / Art.#	Forlængerrør / Extension tube
KA108X	KABI Maxi Forlængerrør / Extension tube

Længde / Length
160mm



NB: Standard beholderfarver som beskrevet. Vi leverer gerne kundetilpassede sprayers, evt. med eget præg.
Note: Standard container as described. We also offer custom sprayers with your own mark.

KABI fremstiller en komplet serie af Chemo-sprayere. Sprayhovedet er testet og garanteret funktionsdygtigt i 50000 pumpetryk ved alm. vand.

KABI Chemo sprayhoved med Justerbar dyse:

Benyttes til mange aggressive væsker da sprayhovedet er produceret af kemikalie resistente materialer.

KABI Chemo sprayhoved kan også leveres med Bruse- og Skumfunktion.

KABI manufactures a complete range of Chemo-sprayers. The spray heads have been tested and proved functional after 50000 strokes using ordinary water.

KABI Chemo spray heads with adjustable nozzle:

Suitable for aggressive liquids as the spray head is made of chemical resistant materials.

KABI Chemo spray head can also be offered with Shower- and Foam function.



Forstøver dyse / Fine nozzle

Art.nr. / Art.#	Sprayhoved / Spray head	Indhold / Capacity	Beholderfarve / Container colour	Emb. / Quantity
KA500CH	KABI Chemo	0,50 ltr.	Gul / Yellow	12
KA505CH	KABI Chemo	0,50 ltr.	Gul / Yellow	12
KA500CH-AL	KABI Chemo	0,60 ltr.	Aluminium	48
KA650CHBLÅ	KABI Chemo (Reg. design)	0,65 ltr.	Blå / Blue	12
KA650CHGUL	KABI Chemo (Reg. design)	0,65 ltr.	Gul / Yellow	12
KA650CHHVID	KABI Chemo (Reg. design)	0,65 ltr.	Hvid / White	12
KA650CHNATUR	KABI Chemo (Reg. design)	0,65 ltr.	Natur / Natural	12
KA650CHGRØN	KABI Chemo (Reg. design)	0,65 ltr.	Grøn / Green	12
KA650CHRØD	KABI Chemo (Reg. design)	0,65 ltr.	Rød / Red	12
KA750CH	KABI Chemo	0,75 ltr.	Gul / Yellow	12
KA1005CH	KABI Chemo	1,00 ltr.	Gul / Yellow	12
KA10CH	KABI Chemo	1,00 ltr.	Gul / Yellow	12

Skumfunktion / Foam function

Art.nr. / Art.#	Sprayhoved / Spray head	Indhold / Capacity	Beholderfarve / Container colour	Emb. / Quantity
KAS500CH	KABI Chemo	0,50 ltr.	Gul / Yellow	12
KAS505CH	KABI Chemo	0,50 ltr.	Gul / Yellow	12
KAS650CHGUL	KABI Chemo (Reg. design)	0,65 ltr.	Gul / Yellow	12
KAS750CH	KABI Chemo	0,75 ltr.	Gul / Yellow	12
KAS1005CH	KABI Chemo	1,00 ltr.	Gul / Yellow	12
KAS10CH	KABI Chemo	1,00 ltr.	Gul / Yellow	12

Brusefunktion / Shower function

Art.nr. / Art.#	Sprayhoved / Spray head	Indhold / Capacity	Beholderfarve / Container colour	Emb. / Quantity
KAB500CH	KABI Chemo	0,50 ltr.	Gul / Yellow	12
KAB505CH	KABI Chemo	0,50 ltr.	Gul / Yellow	12
KAB650CHGUL	KABI Chemo (Reg. design)	0,65 ltr.	Gul / Yellow	12
KAB750CH	KABI Chemo	0,75 ltr.	Gul / Yellow	12
KAB1005CH	KABI Chemo	1,00 ltr.	Gul / Yellow	12
KAB10CH	KABI Chemo	1,00 ltr.	Gul / Yellow	12

Tilbehør / Accessories

Art.nr. / Art.#	Sprayhoved / Spray head	Farve / Colour	Emb. / Quantity
KA502	KABI Chemo	Sort / Black	350
KAS502	KABI Chemo Skumhoved / Foam head	Sort / Black	350
KAB502	KABI Chemo Brusehoved / Shower head	Sort / Black	350

Art.nr. / Art.#	Forlængerrør / Extension tube	Længde / Length
KA108X	KABI Chemo & Maxi Forlængerrør / Extension tube	160mm



NB: Standard beholderfarver som beskrevet. Vi leverer gerne kundetilpassede sprayere, evt. med eget præg.
Note: Standard container as described. We also offer custom sprayere with your own mark.

KABI Tryk-sprayer EPDM

Velegnet til forstøvning af alkaliske medier med en pH værdi fra 7-14 (pH værdien er vejledende). Specielt velegnet til professionel rengøring og desinfektion. Beholderen er med integreret skala. Skalaen har særlige markeringer for 2%, 5% og 10% blandinger. Praktiske anti-slip riller på beholderens hals, gør det nemmere at skrue sprayhovedet af og på. Tryksprayeren er forsynet med justerbar dyse og aflastningsventil.

Arbejdstryk: 3 bar.

Pakninger: EPDM.

Art.nr.	Indhold	Pakninger	PH	Emb.
KA5010BLUE	1,0 ltr.	EPDM	7-14	6

KABI Pressure sprayer EPDM

Suitable for spraying alkaline media with a pH value from 7-14 (pH value is indicative). Particularly suitable for professional cleaning and disinfection. Integrated dosage scale embossed into the bottle incl. special markings for 2%, 5% and 10% mixing ratios. Convenient anti slide grooves on the bottle-neck, makes it easier to screw the sprayhead on and off. Provided with adjustable nozzle and pressure relief valve.

Working pressure: 3 bar.

Gaskets: EPDM.

Art.#	Capacity	Gaskets	PH	Quantity
KA5010BLUE	1,0 ltr.	EPDM	7-14	6

**KABI Tryk-sprayer NBR**

Velegnet til forstøvning af vandbaserede ikke aggressive væsker. Specielt velegnet til de fleste biologiske og konventionelle plantebeskyttelsesmidler såsom ukrudtsmidler, svampemidler og insektmidler, flydende gødningsmidler mm. Beholderen er med integreret skala. Skalaen har særlige markeringer for 2%, 5% og 10% blandinger. Praktiske anti-slip riller på beholderens hals, gør det nemmere at skrue sprayhovedet af og på. Forsynet med justerbar dyse og aflastningsventil.

Arbejdstryk: 3 bar.

Pakninger: NBR.

Art.nr.	Indhold	Pakninger	PH	Emb.
KA5010GREEN	1,0 ltr.	NBR	4-9	6

KABI Pressure sprayer NBR

Suitable for spraying water-based non-aggressive liquids. Particularly suitable for most biological and conventional plant protection products such as herbicides, fungicides and insecticides, liquid fertilizers etc. Integrated dosage scale embossed into the bottle incl. special markings for 2%, 5% and 10% mixing ratios. Convenient anti slide grooves on the bottle-neck, makes it easier to screw the sprayhead on and off. Provided with adjustable nozzle and pressure relief valve.

Working pressure: 3 bar.

Gaskets: NBR.

Art.#	Capacity	Gaskets	PH	Quantity
KA5010GREEN	1,0 ltr.	NBR	4-9	6

**KABI Tryk-sprayer VITON**

Velegnet til forstøvning af aggressive væsker, dog ikke sprit og acetoneholdige produkter. Specielt velegnet til olie og syrebaserede væsker. Beholderen er med integreret skala. Skalaen har særlige markeringer for 2%, 5% og 10% blandinger. Praktiske anti-slip riller på beholderens hals, gør det nemmere at skrue sprayhovedet af og på. Forsynet med justerbar dyse og aflastningsventil.

Arbejdstryk: 3 bar.

Pakninger: Viton.

Art.nr.	Indhold	Pakninger	PH	Emb.
KA5010RED	1,0 ltr.	VITON	2-8	6

KABI Pressure sprayer VITON

Suitable for spraying aggressive liquids, except products containing ethanol and acetone. Particularly suitable for oil and acid-based liquids. Integrated dosage scale embossed into the bottle incl. special markings for 2%, 5% and 10% mixing ratios. Convenient anti slide grooves on the bottle-neck, makes it easier to screw the sprayhead on and off. Provided with adjustable nozzle and pressure relief valve.

Working pressure: 3 bar.

Gaskets: Viton.

Art.#	Capacity	Gaskets	PH	Quantity
KA5010RED	1,0 ltr.	VITON	2-8	6

**Pakningssæt til tryk-sprayer 5010**

Ekstra pakningssæt til KABI tryksprayers.

Art.nr.	Pakninger	Emb.
KA5999-BLUE/EPDM	EPDM	1
KA5999-GREEN/NBR	NBR	1
KA5999-RED/FPM	VITON	1

Gasket set for pressure sprayer 5010

Extra gasket sets for KABI pressure sprayers.

Art.#	Gaskets	Quantity
KA5999-BLUE/EPDM	EPDM	1
KA5999-GREEN/NBR	NBR	1
KA5999-RED/FPM	VITON	1



KABI Chemo tryk-sprayer 1,0 ltr.

Velegnet til forstøvning af aggressive væsker, dog ikke sprit- og acetoneholdige produkter. Specielt velegnet til oliebaseerede væsker. Man skal dog altid sikre sig at sprayeren ikke beskadiges af det anvendte produkt. Er forsynet med justerbar dyse. Pumpe af polyamid. Pakning af Viton. Arbejdstryk: 3 bar. Indhold: 1,0 liter.

Art.nr.	Emb.
KA2010CH	6

KABI Chemo pressure sprayer 1,0 ltr.

Suitable for atomisation of aggressive liquids, except products containing alcohol- and acetone. Suitable for especially oil-based liquids. Adjustable nozzle. Polyamide pump. Viton seals. Working pressure: 3 bar. Capacity: 1.0 ltr.

Art.#	Quantity
KA2010CH	6



KABI Chemo tryk-sprayer 1,6 ltr.

Velegnet til forstøvning af aggressive væsker, dog ikke sprit- og acetoneholdige produkter. Specielt velegnet til oliebaseerede væsker. Man skal dog altid sikre sig at sprayeren ikke beskadiges af det anvendte produkt. Kan både pumpes manuelt, og fyldes fra kompresser. Justerbar dyse, overtryksventil. Pumpe af Polyamid. Pakning af Viton. Arbejdstryk: 4 bar. Indhold: 1,6 liter.

Art.nr.	Emb.
KA1600CH	4

KABI Chemo pressure sprayer 1,6 ltr.

Suitable for atomisation of aggressive liquids, except products containing alcohol- and acetone. Suitable for especially oil-based liquids. Connecting branch for pneumatic pumping and manual pressure pumping. Adjustable nozzle and pressure relief valve. Polyamide pump. Viton seals. Working pressure: 4 bar. Capacity: 1,6 ltr.

Art.#	Quantity
KA1600CH	4



Tilbehør / Accessories

Art.nr. / Art.#	Forlængerrør & Dyser / Extension tubes & nozzles	Længde / Length
KA10008	Forlængerrør med spray dyse / Extension tube with spray nozzle, for 2010CH & 1600CH	300mm
KAS3002	Skumdyse / Shower nozzle, for 2010CH & 1600CH	
KAF3002	Fladstråledyse / Flat spray nozzle, for 2010CH & 1600CH	



KA10008



KAS3002



KAF3002

KABI tryk-sprayer 1,0 ltr.

Velegnet til forstøvning af vandbaserede ikke aggressive væsker. Er forsynet med justerbar dyse. Sikkerhedsventil. Arbejdstryk: 3 bar. Indhold: 1,0 liter. Pakning: NBR.

Tilbehør: Forlængerrør & Dyser, se side 9.

Art.nr.	Emb.
KA2010	6

KABI Pressure sprayer

Suitable for atomisation of water-based non-aggressive liquids. Adjustable nozzle, safety valve. Working pressure: 3 bar. Capacity: 1,0 ltr. Seal: NBR.

Acc.: Extension tubes & Nozzles, see page 9.

Art.#	Quantity
KA2010	6

**KABI All-round tryksprøjte**

All-round sprøjten leveres med 40cm messing lanse, messingdyse og bærerem.

Pakning: FPM (Viton®).

Arbejdstryk: 3 bar.

Indhold: 5,0 liter.

Art.nr.	Emb.
KA5000	8

KABI All-round pressure sprayer

All-round pressure sprayer with 40cm brass lance, brass nozzle and carrying strap.

Seal: FPM (Viton®).

Working pressure: 3 bar.

Capacity: 5,0 ltr.

Art.#	Quantity
KA5000	8

**KABI Batteri Fylder**

Forsynet med slank tud der kan gå ned i de fleste batterier. Tuden har en 40 gr. hældning. Beholderen er på 1,0 ltr. og er i KABI Panser Plast (PE).

Art.nr.		Emb.
KA1000	KABI Batteri fylder	12
KA1001	Løst hoved f/ Batteri fylder	1

KABI Battery Filler

With slender spout suitable for most batteries. Bent spout (40 degrees). Made of KABI reinforced plastic (PE). Capacity 1,0 ltr.

Art.#		Quantity
KA1000	KABI Battery filler	12
KA1001	Head for Battery filler	1



KABI Skumpistol

Skumpistol til rengøring. Tilsluttes vandslange og arbejder med normalt vandtryk (2,5-6 bar).

0,9 ltr. transparent beholder. Skumdyse der kan roteres 90°. Robust pistolgreb med lynkobling af messing, for enkel og hurtig vandtilkobling. Integreret drejhjul med 6 forskellige indstillinger af dosering. Vandtemperatur: Max. 60°C.

Vægt: 0,5 kg.

Art.nr. Emb.

KA9000 1

KABI Foam gun

Foam gun for cleaning. Connects to a water hose and works with normal water pressure (2.5-6 bar).

0.9 liter transparent container. Foam nozzle that can be rotated 90°. Robust trigger with brass quick coupling, for easy water supply. Integrated mixing ratio dial with 6 different mixing ratio settings.

Water temperature: Max. 60°C.

Weight: 0.5 kg.

Art.# Quantity

KA9000 1



KABI Skumlanse sæt

KABI skumlanse til brug sammen med en højtryksrensers. Solidt skumhoved af messing. Drejeventil til at justere forholdet mellem vand og rengøringsmiddel. Skumsprøjtetebreden kan justeres på dysen. Transparent beholder.

Inkl. adaptere til Nilfisk/Alto, Kärcher K/AVA og Kärcher HD (gammel og ny).

Dyse: ø1,25 mm.

Flaske: 1 ltr.

Max. arbejdsdruk: 275 bar (4000 psi).

Max. temperatur, vand: 60°C.

Art.nr. Emb.

KA9200 1

KABI Foam Cannon kit

KABI foam cannon for use with a high-pressure cleaner. Solid brass body foam head. Rotary valve to adjust the ratio of water to detergent. The foam spray width can be adjusted on the nozzle. Transparent container.

Incl. adapters for Nilfisk/Alto, Kärcher K/AVA and Kärcher HD (old and new).

Nozzle: ø1.25 mm.

Bottle volume: 1 ltr.

Max. pressure: 275 bar (4000 psi).

Max. temperature, water: 60°C.

Art.# Quantity

KA9200 1



KABI Skumlanse

KABI skumlanse uden beholder til brug sammen med en højtryksrensers. Solidt skumhoved af messing. Drejeventil til at justere forholdet mellem vand og rengøringsmiddel. Skumsprøjtetebreden kan justeres på dysen.

Dyse: ø1,25 mm.

Max. arbejdsdruk: 275 bar (4000 psi).

Max. temperatur, vand: 60°C.

Art.nr. Emb.

KA9200-10 1

KABI Foam Cannon

KABI foam cannon without bottle for use with a high-pressure cleaner. Solid brass body foam head. Rotary valve to adjust the ratio of water to detergent. The foam spray width can be adjusted on the nozzle.

Nozzle: ø1.25 mm.

Max. pressure: 275 bar (4000 psi).

Max. temperature, water: 60°C.

Art.# Quantity

KA9200-10 1



Tilbehør til KABI Skumlanse sæt

Ekstra adaptere til KABI skumlanse.

Art.nr.	Adapter til	Emb.
KA9200-11	Kärcher K/AVA	1
KA9200-12	Kärcher HD (gl.)	1
KA9200-13	Kärcher HD (ny)	1
KA9200-14	Nilfisk/Alto	1
KA9200-15	Nilfisk/Stihl	1
KA9200-16	Huter/Anlu	1
KA9200-17	Bosch/Faip	1
KA9200-18	Kranzle	1
KA9200-19	Bosch/B&D	1
KA9200-20	Lavor/Sterwins	1
KA9200-21	1/4" Quick kobling	1

Accessories for KABI Foam Cannon kit

Extra adapters for KABI foam cannon.

Art.#	Adapter for	Quantity
KA9200-11	Kärcher K/AVA	1
KA9200-12	Kärcher HD (old)	1
KA9200-13	Kärcher HD (new)	1
KA9200-14	Nilfisk/Alto	1
KA9200-15	Nilfisk/Stihl	1
KA9200-16	Huter/Anlu	1
KA9200-17	Bosch/Faip	1
KA9200-18	Kranzle	1
KA9200-19	Bosch/B&D	1
KA9200-20	Lavor/Sterwins	1
KA9200-21	1/4" Quick coupling	1



Stænkeflaske 0,5 ltr.

Praktisk flaske af PE plast med perforeret låg. Bruges til at tilføre ekstra fugt på klude eller mopper, eller til at stænke direkte på overfladen for at opløse en plet. Stænkeflasken kan bruges til vand eller andre væsker. Flasken fås med låg i 4 forskellige farver, som f.eks. kan bruges til farvekodning.

Denne flaske er lavet af hård plast.

Art.nr.	Låg	Plast type	Emb.
KA60205-BLÅ	Blå	PE, Hård	20
KA60205-GRØN	Grøn	PE, Hård	20
KA60205-GUL	Gul	PE, Hård	20
KA60205-RØD	Rød	PE, Hård	20
KA60205-MIX	Ass.	PE, Hård	5x4

Sifting bottle 0.5 ltr.

Handy bottle of PE plastic with a perforated lid. Used to add extra moisture to cloths or mops or to sprinkle directly onto the surface to dissolve a stain. The sifting bottle can be used for water and other liquids. The bottle is available with lids in 4 different colors, that can be used for color coding.

This bottle is made of hard plastic.

Art.#	Lid	Plastic type	Quantity
KA60205-BLÅ	Blue	PE, Hard	20
KA60205-GRØN	Green	PE, Hard	20
KA60205-GUL	Yellow	PE, Hard	20
KA60205-RØD	Red	PE, Hard	20
KA60205-MIX	Mixed	PE, Hard	5x4

**Stænkeflaske 0,65 ltr.**

Praktisk flaske af PE plast med perforeret låg. Bruges til at tilføre ekstra fugt på klude eller mopper, eller til at stænke direkte på overfladen for at opløse en plet. Stænkeflasken kan bruges til vand eller andre væsker. En doseringsskala er præget ind i flasken med indeksering pr. 50 ml. Flasken fås med låg i 4 forskellige farver, som f.eks. kan bruges til farvekodning.

Denne flaske er lavet af hård plast.

Art.nr.	Låg	Plast type	Emb.
KA60207-BLÅ	Blå	PE, Hård	24
KA60207-GRØN	Grøn	PE, Hård	24
KA60207-GUL	Gul	PE, Hård	24
KA60207-RØD	Rød	PE, Hård	24
KA60207-MIX	Ass.	PE, Hård	6x4

Sifting bottle 0.65 ltr.

Handy bottle of PE plastic with a perforated lid. Used to add extra moisture to cloths or mops or to sprinkle directly onto the surface to dissolve a stain. The sifting bottle can be used for water and other liquids. A dosage scale is embossed into the bottle with indexing per. 50 ml. The bottle is available with lids in 4 different colors, that can be used for color coding.

This bottle is made of hard plastic.

Art.#	Lid	Plastic type	Quantity
KA60207-BLÅ	Blue	PE, Hard	24
KA60207-GRØN	Green	PE, Hard	24
KA60207-GUL	Yellow	PE, Hard	24
KA60207-RØD	Red	PE, Hard	24
KA60207-MIX	Mixed	PE, Hard	6x4

**Stænkeflaske 0,65 ltr.**

Praktisk flaske af PE plast med perforeret låg. Bruges til at tilføre ekstra fugt på klude eller mopper, eller til at stænke direkte på overfladen for at opløse en plet. Stænkeflasken kan bruges til vand eller andre væsker. En doseringsskala er præget ind i flasken med indeksering pr. 50 ml. Flasken fås med låg i 4 forskellige farver, som f.eks. kan bruges til farvekodning.

Denne flaske er lavet af blød plast.

Art.nr.	Låg	Plast type	Emb.
KA60208-BLÅ	Blå	PE, Blød	24
KA60208-GRØN	Grøn	PE, Blød	24
KA60208-GUL	Gul	PE, Blød	24
KA60208-RØD	Rød	PE, Blød	24
KA60208-MIX	Ass.	PE, Blød	6x4

Sifting bottle 0.65 ltr.

Handy bottle of PE plastic with a perforated lid. Used to add extra moisture to cloths or mops or to sprinkle directly onto the surface to dissolve a stain. The sifting bottle can be used for water and other liquids. A dosage scale is embossed into the bottle with indexing per. 50 ml. The bottle is available with lids in 4 different colors, that can be used for color coding.

This bottle is made of soft plastic.

Art.#	Lid	Plastic type	Quantity
KA60208-BLÅ	Blue	PE, Soft	24
KA60208-GRØN	Green	PE, Soft	24
KA60208-GUL	Yellow	PE, Soft	24
KA60208-RØD	Red	PE, Soft	24
KA60208-MIX	Mixed	PE, Soft	6x4

**Låg til stænkeflaske**

Låg i 4 forskellige farver.

Art.nr.	Farve	Emb.
KA60200-BLÅ	Blå	1
KA60200-GRØN	Grøn	1
KA60200-GUL	Gul	1
KA60200-RØD	Rød	1

Lid for sifting bottle

Lids in 4 different colours.

Art.#	Color	Quantity
KA60200-BLÅ	Blue	1
KA60200-GRØN	Green	1
KA60200-GUL	Yellow	1
KA60200-RØD	Red	1



Schweiziske Birchmeier har siden 1876 fremstillet forstøvere, tryksprøjter, skumsprøjter og rygsprøjter i høj kvalitet. Til brancher som f.eks. bygge & anlæg, anlægsgartnere, landbrug, industri og auto. Funktionel og slidstærk kvalitet til de krævende brugere.

Since 1876, Swiss company Birchmeier has manufactured high quality hand sprayers, pressure sprayers, foamers and backpack sprayers. For industries such as construction, landscaping, agriculture, industry and automotive. Functional and durable quality for demanding users.



Grøn: velegnet til de fleste biologiske og konventionelle plantebeskyttelsesmidler såsom ukrudtsmidler, svampemidler og insektmidler, flydende gødningsmidler mm.

Green: suitable for most biological and conventional plant protection pesticides such as herbicides, fungicides and insecticides, liquid fertilizers, plant tonics etc.



Sort: for olieholdige opløsningsmidler (f.eks. affedtningsmidler).

Black: for mineral oil based solvents (e.g. degreaser).



Rød: for syrebaserede midler.

Red: for acid-containing spray (e.g. acidic limescale).



Blå: for for alkaliske eller ætsende rengøringsmidler.

Blue: for alkaline or caustic cleaning agents (e.g. alkaline cleaner).



= Ikke egnet / not suitable

Til haven / For the garden



Til industri / For the industry


BIRCHMEIER®

SMART UND SWISS SEIT 1876

Håndforstøver Foxy, 15 bar

Robust og holdbar kvalitetssprøjte med et kraftfuldt sprayhoved og justerbar dyse. Velegnet til hjem, have og skadedyrs bekæmpelse. Transparent beholder med skala 100 - 500 ml. Indhold: 0,5 ltr. Pakning: NBR. Stempeltryk: op til 15 bar.

Art.nr.	Rotation	Emb.
BM10937503	Normal	20
BM10937507	360 grader	20

Hand sprayer Foxy, 15 bar

The robust, top quality trigger sprayer, durable with a powerful trigger pump for home and workshop. Adjustable plastic nozzle. Transparent tank with a scale from 100 - 500 ml. Capacity: 0.5 ltr. Seal: NBR. Piston pressure: up to 15 bar.

Art.#	Rotation	Quantity
BM10937503	Normal	20
BM10937507	360 degrees	20

**Håndforstøver Melua 0,5**

Håndsprøjte specielt til orkidéer med messing dyse der giver den fineste sprøjtetåge. Indhold: 0,5 ltr. Pakning: Viton. Stempeltryk: op til 10 bar.

Art.nr.	Rotation	Emb.
BM11863601	360 grader	10

Hand sprayer Melua 0.5

The hand sprayer for orchids with the finest spray mist. With brass nozzle. Capacity: 0.5 ltr. Seal: Viton. Piston pressure: up to 10 bar.

Art.#	Rotation	Quantity
BM11863601	360 degrees	10

**Tryksprøjte Super Star 1,25 ltr.**

Lille praktisk tryksprøjte velegnet til havearbejde. Med sikkerhedsventil, der også virker som aflastningsventil, dyse i messing og justerbart hoved. Beholder i gennemsigtig plast. Ergonomisk og effektiv håndpumpe. Stor åbning til påfyldning. Indhold: 1,25 ltr. Pakning: NBR. Stempeltryk: 3 bar.

Art.nr.	Rotation	Emb.
BM11963101	360 grader	5

Compression sprayer Super Star 1.25 ltr.

Small, handy compression sprayer for home and garden. With brass nozzle and adjustable head. Red safety valve and pressure release support. Transparent plastic tank. Ergonomic and efficient hand pump. Large filling opening. Capacity: 1.25 ltr. Seal: NBR. Piston pressure: 3 bar.

Art.#	Rotation	Quantity
BM11963101	360 degrees	5

**Tryksprøjte Rose Star 1,25 ltr.**

Lille praktisk tryksprøjte, velegnet til havearbejde (roser og buske). Justerbar messingdyse på fleksibel forlænger, 26 cm. Sprayer i enhver position (360°). Transparent plastbeholder. Ergonomisk og effektiv håndpumpe. Sikkerheds-/aflastningsventil. Til vand, biologiske midler, ukrudtsmidler mm. Indhold: 1,25 ltr. Stempeltryk: 3 bar.

Art.nr.	Rotation	Emb.
BM11978501	360 grader	4

Compression sprayer Rose Star 1.25 ltr.

Small, handy compression sprayer for home and garden (roses and boxtrees). Adjustable brass nozzle with bendable extension. Spraying in any (360°) position. Transparent plastic tank. Ergonomic and efficient hand pump. Red safety valve and pressure release. For water, biological agents, herbicides etc. Capacity: 1.25 ltr. Piston pressure: 3 bar.

Art.#	Rotation	Quantity
BM11978501	360 degrees	4

**Doseringssprøjte Aquamix 1,25 V**

Gødningsblander til flydende bestøvning uden en vandkande. Doseringssystemet sikrer en præcis blanding af vand og flydende gødning. Indhold: 1,25 ltr. 4 blandingsforhold: 0,2%, 0,5%, 1% og 2%. Ydelse: op til 14 ltr./min.

Art.nr.	Emb.
BM11953401	5

Fertilizer mixing unit Aquamix 1.25 V

Fertilizer mixing unit for liquid fertilising without a watering can. The dosing system ensures a precise mixture of water and commercial liquid fertiliser. Capacity: 1.25 ltr. 4 mixing ratios: 0,2%, 0,5%, 1% og 2%. Flow: up to 14 ltr./min.

Art.#	Quantity
BM11953401	5



Tryksprøjte Garden Star 5

Den klassiske robuste kvalitetstryksprøjte til den krævede hobbygartner. Sikkerheds-/aflastningsventil. Integreret påfyldningstragt (enkel og nem påfyldning). Letvægts plastpistol. Lanse i messing, 50 cm indstik. Justerbar dyse i messing, indstik. Pumpestang i rustfrit stål. Justerbar skulderrem.

Indhold: 5 ltr.
Pakning: NBR.
Arbejdstryk: 3 bar.

Art.nr.	Emb.
BM11859201	1

Compression sprayer Garden Star 5

The classic, a robust, simple compression sprayer for hobby gardeners. Safety valve. Integrated filling funnel. Light weight plastic trigger. Robust 50 cm brass spray lance. Adjustable brass nozzle. Combined pump- and carrying handle with spray lance holder. Simple plug-in system. Carrying belt.

Capacity: 5 ltr.
Seal: NBR.
Working pressure: 3 bar.

Art.#	Quantity
BM11859201	1

**Tryksprøjte Hobby Star 5**

Tryksprøjte til hobbygartneren i den kendte Birchmeier kvalitet. Strålerør i plastik 40 cm for indstik. Justerbar dyse i plast for indstik. Sikkerheds-/aflastningsventil. Integreret påfyldningstragt. Niveauskala.

Indhold: 5 ltr.
Pakning: NBR.
Stempeltryk: 3 bar.

Art.nr.	Emb.
BM11642801	1

Compression sprayer Hobby Star 5

The cost-effective compression sprayers for hobby gardeners. 40 cm spray lance and adjustable plastic nozzle. With safety valve and integrated filling funnel. Transparent plastic tank with 5 ltr. filling volume. Capacity: 5 ltr. Seal: NBR. Operating pressure: 3 bar.

Art.#	Quantity
BM11642801	1

**Tryksprøjte Profi Star 3 Viton**

Fleksibel allround sprøjte til professionel skadedyrsbekæmpelse.

Tilslutningsventil til trykluft. Justerbar dyse i messing. Sikkerheds- og udluftningsventil. Transparent trykbeholder af plast med plastforstærket bund. Stor påfyldningsåbning med integreret tragt. Spiral-slange til fleksibel håndtering.

Indhold: 3 ltr.
Pakning: Viton.
Stempeltryk: 4 bar.

Art.nr.	Dyse	Emb.
BM11831001	1,3 mm 1/4"R	1

Compression sprayer Profi Star 3 Viton

Flexible allround sprayer for professional pest control applications. Compressed air connector valve. Adjustable brass nozzle. Safety and relief valve. Plastic pressure tank with additional plastic tank base. Large filling opening with integrated filling funnel. Spiral hose for a flexible handling.

Capacity: 3 ltr.
Seal: Viton.
Operating pressure: 4 bar.

Art.#	Nozzle	Quantity
BM11831001	1.3 mm 1/4"BSP	1

**Tryksprøjte Profi Star 5 Viton**

Tryksprøjte til den professionelle gartner, og til vedligeholdelse af alle udendørs arealer.

Justerbar trykreguleringsventil PR 3 (1-3 bar). Tilslutningsventil til trykluft. Heavy-duty pistolhåndtag. Strålerør i messing 50 cm 1/4" udv. Justerbar dyse i messing. Sikkerheds-/aflastningsventil. Integreret påfyldningstragt. Bæresele. Niveauskala som viser aktuel tankindhold. Forstærket sokkel.

Indhold: 5 ltr.
Pakning: Viton.
Stempeltryk: 4 bar.

Art.nr.	Emb.
BM12117401	1

Compression sprayer Profi Star 5

The professional compression sprayer for general use in the garden and in industry. Adjustable pressure control valve PR 3 (1-3 bar). Compressed air connector valve. Heavy duty plastic trigger. Spray lance 50 cm curved, brass. Adjustable universal brass nozzle. Safety valve and integrated filling funnel. Carrying belt. Transparent tank with imprinted filling scale in litres and US gallons.

Capacity: 5 ltr.
Seal: Viton.
Operating pressure: 4 bar.

Art.#	Quantity
BM12117401	1

**Tryksprøjte Accu Star 8**

Batteridrevet sprøjte til vedligeholdelse af udendørs arealer. Bliver drevet af 8 stk. AA batterier, alm. eller genopladelige. Max. 2,8 timer (70 ltr. ved tågespray og 1,5 bar) inden batterierne skal skiftes.

Strålerør i messing 50 cm. Justerbar dyse i messing. Sikkerheds-/aflastningsventil. Integreret påfyldningstragt. Bæresele.

Indhold: 8 ltr.
Stempeltryk: 1,5 bar.

Art.nr.	Emb.
BM12038001	1

Compression sprayer Accu Star 8

Battery-powered sprayer for general use in the garden. Powered by 8 AA batteries, normal or rechargeable. Max. spraying time up to 2.8 hours (70 ltr. mist spray at 1.5 bar). Spray lance 50 cm straight, brass. Adjustable brass nozzle. Safety valve and integrated filling funnel. Carrying belt.

Capacity: 8 ltr.
Operating pressure: 1.5 bar.

Art.#	Quantity
BM12038001	1



Ryggsprøjte RPD 15 ABR, 15 ltr.

Kompakt 15 ltr. ryggsprøjte. Enkel at bruge, og hurtigt at rengøre. Lanse med lige indstik.

Ekstern pumpe, integreret direkte i pumpearmen. Justerbar messing dyse. Integreret holder for strålerør. Stor påfyldningsåbning med filter. Pumpearman kan monteres i begge sider.

Indhold: 15 ltr.

Max. arbejdsdruk: 5 bar.

Art.nr.	Emb.
BM11924701	1

Backpack sprayer RPD 15 ABR, 15 ltr.

Handy 15 ltr. backpack sprayer. Simple to use, and easy to clean. With compression fitting assembly.

Externally mounted pump. Adjustable brass nozzle. Holder for spray lance. Large filling opening with strainer. Hose outlet in working direction. Can be used left or right.

Capacity: 15 ltr.

Max. working pressure: 5 bar.

Art.#	Quantity
BM11924701	1

**Ryggsprøjte RPD 15 ATS, 15 ltr.**

Kompakt 15 ltr. manuel ryggsprøjte. Enkel at bruge, og hurtigt at rengøre. Lanse med udv. 1/4" gevind.

Ekstern pumpe, integreret direkte i pumpearmen. Justerbar messing dyse. Integreret holder for strålerør. Stor påfyldningsåbning med filter. Pumpearman kan monteres i begge sider.

Indhold: 15 ltr.

Max. arbejdsdruk: 5 bar.

Art.nr.	Emb.
BM11924801	1

Backpack sprayer RPD 15 ATS, 15 ltr.

Handy 15 ltr. backpack sprayer. Simple to use, and easy to clean. With screwable fitting assembly.

Externally mounted pump. Adjustable brass nozzle. Holder for spray lance. Large filling opening with strainer. Hose outlet in working direction. Can be used left or right.

Capacity: 15 ltr.

Max. working pressure: 5 bar.

Art.#	Quantity
BM11924801	1

**Ryggsprøjte Flox 10 AT3**

Ny opdateret version af den kendte Flox 10.

Ergonomisk udformet tank. Forstærket sokkelbund i rustfrit stål. Kraftige polstrede bæreseler med klik system. Ny forbedret pumpearman, som kan monteres i både højre og venstre side. Længde-indstilleligt anatomisk udformet pumpehåndtag. Nyt forbedret pistolgreb med integreret filter samt spærre- og fastholdelsesfunktion. 60 cm messing strålerør. 6 bar pumpetryk. Justerbar dyse 1,3 mm. Udvendig pumpe med mulighed for efterjustering af pumpepakninger. Robust og driftssikker.

Indhold: 10 ltr.

Pakning: NBR.

Max. stempeltryk: 6 bar.

Art.nr.	Type	Dyse	Emb.
BM12004501	AT3	Justerbar 1,3mm	1

Backpack sprayer Flox 10 AT3

New updated version of the well known Flox 10.

Ergonomically shaped tank. Stainless steel reinforced frame. Padded S-shaped carrying belts with click system. New improved pump lever. Left or right handed operation. Adjustable length handle, anatomically shaped and comfortable. New improved trigger with integrated fine filter. Locking and blocking function. 60 cm brass spray tube. 6 bar maximum pressure. Adjustable nozzle 1.3 mm. Adjustable rubber piston ring. Robust and reliable brass pump, mounted externally.

Capacity: 10 ltr.

Seal: NBR.

Max. piston pressure: 6 bar.

Art.#	Type	Nozzle	Quantity
BM12004501	AT3	Adjustable 1.3mm	1

**Ryggsprøjte Iris 15**

Ny opdateret version af den kendte Iris 15.

Ergonomisk udformet tank. Forstærket sokkelbund i rustfrit stål. Kraftige polstrede bæreseler med klik system. Ny forbedret pumpearman, som kan monteres i både højre og venstre side. Længde-indstilleligt anatomisk udformet pumpehåndtag. Nyt forbedret pistolgreb med integreret filter samt spærre- og fastholdelsesfunktion. 60 cm messing strålerør. 6 bar pumpetryk. Udvendig pumpe med mulighed for efterjustering af pumpepakninger. Robust og driftssikker.

Indhold: 15 ltr.

Pakning: NBR.

Max. stempeltryk: 6 bar.

Art.nr.	Type	Dyse	Emb.
BM12004101	AT1	Duro 1,5mm	1

Backpack sprayer Iris 15

New updated version of the well known Iris 15.

Ergonomically shaped tank. Stainless steel reinforced frame. Padded S-shaped carrying belts with click system. New improved pump lever. Left or right handed operation. Adjustable length handle, anatomically shaped and comfortable. New improved trigger with integrated fine filter. Locking and blocking function. 60 cm brass spray tube. 6 bar maximum pressure. Adjustable rubber piston ring. Robust and reliable brass pump, mounted externally.

Capacity: 15 ltr.

Seal: NBR.

Max. piston pressure: 6 bar.

Art.#	Type	Nozzle	Quantity
BM12004101	AT1	Duro mist 1.5mm	1



Rygspøjte Accu REA 15 AC1 (CAS batteri)

Batteridrevet rygspøjte med CAS system (batteri og lader). Elektronisk trykstyret. Trinløs regulering af arbejdsdruk. Beskyttelse af pumpe/tørøbssikring. Beskyttelse/overvågning af batteri. Stor påfyldningsåbning med filter.

Indstillelige bæreseler med "klik" system. CAS Li-Ion batteri samt lader. Justerbar plast/messing dyse og strålerør i messing, 1/4" gevind.

Indhold: 15 ltr.

Pakning: NBR.

Batteri (CAS system): Lithium-ion 18 V / 2 Ah.

Arbejdsdruk: 1 - 3 bar.

Art.nr. Emb.

BM12070701 1

Backpack sprayer REA 15 AC1 (CAS batteri)

Battery powered backpack sprayer with CAS system (battery and charger). Electronical pressure control. Continuous variable operating pressure. Protective setup for pump and battery. Large filling opening with strainer.

Click belt system. CAS Lithium-ion battery. Quick charger. Brass spray lance. Adjustable plastic/brass nozzle.

Capacity: 15 ltr.

Seal: NBR.

Battery (CAS system): Lithium-ion 18 V / 2 Ah.

Working pressure: 1 - 3 bar.

Art.# Quantity

BM12070701 1

**Rygspøjte Accu REB 15 AC1 (CAS batteri)**

Batteridrevet rygspøjte med CAS system (batteri og lader). Elektronisk trykstyret. Trinløs regulering af arbejdsdruk. Beskyttelse af pumpe/tørøbssikring. Beskyttelse/overvågning af batteri. Stor påfyldningsåbning med filter.

Leveres med:

Indstillelige bæreseler med "klik" system. CAS Li-Ion batteri samt lader. Justerbar dyse og strålerør i messing, 1/4" gevind.

Indhold: 15 ltr.

Pakning: NBR.

Batteri (CAS system): Lithium-ion 18 V / 2 Ah.

Arbejdsdruk: 0,5 - 3 bar.

Art.nr. Emb.

BM12070801 1

Backpack sprayer REB 15 AC1 (CAS batteri)

Battery powered backpack sprayer with CAS system (battery and charger). Electronical pressure control. Continuous variable operating pressure. Protective setup for pump and battery. Large filling opening with strainer.

Delivered with:

Click belt system. CAS Lithium-ion battery and Quick-charger. Brass spray lance. Adjustable brass nozzle.

Capacity: 15 ltr.

Seal: NBR.

Battery (CAS system): Lithium-ion 18 V / 2 Ah.

Working pressure: 0.5 - 3 bar.

Art.# Quantity

BM12070801 1

**Rygspøjte Accu REC 15 AC1 (CAS batteri)**

Batteridrevet rygspøjte med CAS system (batteri og lader). Alle funktioner overvåges og styres elektronisk. Trinløs regulering af arbejdsdruk. Beskyttelse af pumpe/tørøbssikring. Beskyttelse/overvågning af batteri. Stor påfyldningsåbning med filter.

Indstillelige bæreseler med "klik" system. CAS Li-Ion batteri samt lader. Justerbar dyse og strålerør i messing, 1/4" gevind.

Indhold: 15 ltr.

Pakning: NBR.

Batteri (CAS system): Lithium-ion 18 V / 4 Ah.

Arbejdsdruk: 0,5 - 6 bar.

Art.nr. Type Emb.

BM12070901 AC1 - CAS batteri / lader 1

BM12073001 AC2 - uden batteri / lader 1

Backpack sprayer REC 15 AC1 (CAS batteri)

Battery powered backpack sprayer with CAS system (battery and charger). All functions are monitored and controlled electronically. Continuous variable operating pressure. Protective setup for pump and battery. Large filling opening with strainer.

Click belt system. CAS Lithium-ion battery and Quick-charger. Brass spray lance. Adjustable brass nozzle.

Capacity: 15 ltr.

Seal: NBR.

Battery (CAS system): Lithium-ion 18 V / 4 Ah.

Working pressure: 0.5 - 6 bar.

Art.# Type Qty.

BM12070901 AC1 - CAS battery / charger 1

BM12073001 AC2 - w/o battery / charger 1

**Rygspøjte Accu REC 15 PC1 Viton**

Batteridrevet rygspøjte med CAS system (batteri og lader). Alle funktioner overvåges og styres elektronisk. Trinløs regulering af arbejdsdruk. Beskyttelse af pumpe/tørøbssikring. Beskyttelse/overvågning af batteri. Stor påfyldningsåbning med filter.

Leveres med:

Indstillelige bæreseler med "klik" system. CAS Li-Ion batteri samt lader. Fladstråledyse XR 8001 VS Viton (orange). Strålerør i messing, 1/4" gevind.

Indhold: 15 ltr.

Pakning: Viton.

Batteri (CAS system): Lithium-ion 18 V / 4 Ah.

Arbejdsdruk: 0,5 - 6 bar.

Art.nr. Emb.

BM12072001 1

Backpack sprayer REC 15 PC1 Viton

Battery powered backpack sprayer with CAS system (battery and charger). All functions are monitored and controlled electronically. Continuous variable operating pressure. Protective setup for pump and battery. Large filling opening with strainer.

Delivered with:

Click belt system. CAS Lithium-ion battery and Quick-charger. Fanjet nozzle XR 8001 VS Viton (orange). Brass spray lance.

Capacity: 15 ltr.

Seal: Viton.

Battery (CAS system): Lithium-ion 18 V / 4 Ah.

Working pressure: 0.5 - 6 bar.

Art.# Quantity

BM12072001 1



Pulversprøjte Bobby 0,5 ltr.

Den lille, lette pulversprøjte, der kan anvendes til at sprede produkter som knuste sten og sulfater. Den store bælg sikrer en jævn pulversky. Vel afbalanceret transparent beholder. Inkl. 5 dyser (runde, fladstråle samt stråle). Indhold: 0,5 ltr. – svarer til 500 g pulver.

Art.nr. Emb.
BM12043301 1

Power duster Bobby 0.5 ltr.

The small, light powder duster for spreading products like crushed stone and sulphates. Big bellows generates a smooth powder cloud. Transparent plastic tank. Able to stand balanced. Incl. 5 nozzles (round, angel and fanjet nozzles). Capacity: 0.5 ltr. – equivalent to 500 g powder.

Art.# Quantity
BM12043301 1

**Puddersprøjte DR 5**

Den professionelle pulversprøjte med tilslutning for trykluft til en bred vifte af anvendelsesområder. 5 liter svarer til 5 kg pulver. Pudderlanse med udv. dia. ø6 mm. Indhold: 5 ltr. Stempeltryk: 3 bar.

Art.nr. Emb.
BM11625701 1

Powder duster DR 5

The professional powder duster with compressed air connector for a wide range of uses. 5 ltr. volume are equivalent to 5 kg powder. Powder tube with outer dia. 6 mm. Capacity: 5 ltr. Piston pressure: 3 bar.

Art.# Quantity
BM11625701 1

**Benzin dunk Rapidon 6**

Tankning med en trykknop funktion. Enkel, miljøvenlig, og præcis dosering. Ved et enkelt tryk på en trykknop, styres og doseres påfyldningen præcist i den ønskede mængde. Ideel til påfyldning af brændstof på alle små motorer. Indhold: 6 ltr.

Art.nr. Emb.
BM11851301 5

Petrol can Rapidon 6

With Rapidon 6 filling up is quicker, simpler and more convenient than ever. Thanks to the dosing button, you can control the flow of fuel precisely. Fill up of small fuel engines, simply, fast and easy, no spills, no awkward handling. Capacity: 6 ltr.

Art.# Quantity
BM11851301 5



Håndforstøver Super McProper Plus

Den eneste 360° håndforstøver, der er bestandig overfor oliebaseerede opløsningsmidler, som f.eks. WD-40 og Caramba.

Indhold: 0,5 ltr.

Stempeltryk: op til 15 bar.

Art.nr.	Rotation	Emb.
BM11916301	360 grader	10

Hand sprayer Super McProper Plus

The only 360° trigger sprayer specially resistant to mineral oil based solvents, such as WD-40 and Caramba.

Capacity: 0.5 ltr.

Piston pressure: up to 15 bar.

Art.#	Rotation	Quantity
BM11916301	360 degrees	10

**Tryksprøjte Maxi 1,0 for motorrens**

Håndsprøjte, med stor ydelse. Til udlægning af alle olieholdige midler. Specielt velegnet til motorrens.

Robust transparent hvid beholder. Kraftfuld pumpe i forniklet messing. Ergonomisk udformet håndgreb. God stabilitet pga. den store beholder diameter.

Stor påfyldningsåbning. Special dyse ø0,8 mm.

Indhold: 1,0 ltr.

Pakning: Viton.

Stempeltryk: op til 12 bar.

Art.nr.	Emb.
BM11811101	1

Hand sprayer Maxi 1.0

Powerful hand sprayer. Especially suitable for silicon removers and degreasing agents.

Robust tank, transparent white. Powerful nickel plated brass piston pump. Ergonomically shaped handle. Good stability due to tank design. Large filling opening. With mist nozzle ø0.8 mm.

Capacity: 1.0 ltr.

Seal: Viton.

Operating pressure: up to 12 bar.

Art.#	Quantity
BM11811101	1

**Tryksprøjte Super Maxi 1,0**

Særligt resistent overfor bremserens indeholdende Acetone, Methanol, etc.

Robust transparent hvid beholder. Kraftfuld pumpe i forniklet messing. Ergonomisk udformet håndgreb. God stabilitet pga. den store beholder diameter.

Stor påfyldningsåbning. Justerbar dyse ø0,8 mm.

Indhold: 1,0 ltr.

Pakning: BMS 2010 (særligt opløsningsmiddel resistent).

Stempeltryk: op til 12 bar.

Art.nr.	Emb.
BM11870401	1

Hand sprayer Super Maxi 1.0

Most resistant sprayer for brake cleaners and aggressive solvents like Acetone, Methanol, etc.

Robust tank, transparent white. Powerful nickel plated brass piston pump. Ergonomically shaped handle. Good stability due to tank design. Large filling opening. With adjustable nozzle ø0.8 mm.

Capacity: 1.0 ltr.

Seal: BMS 2010 (Specially solvent resistant).

Operating pressure: up to 12 bar.

Art.#	Quantity
BM11870401	1

**Tryksprøjte Spray Matic 1,25 P**

Tryksprøjte i professionel kvalitet velegnet til oliebaseerede produkter. Med justerbar dyse i messing og sikkerheds-/aflastningsventil.

Indhold: 1,25 ltr.

Pakning: Viton.

Stempeltryk: 3 bar.

Art.nr.	Rotation	Emb.
BM11963201	360 grader	5

Compression sprayer Spray Matic 1.25 P

High quality hand compression sprayer suitable for mineral oil based solvents. With adjustable brass nozzle and safety valve.

Capacity: 1.25 ltr.

Seal: Viton.

Piston pressure: 3 bar.

Art.#	Rotation	Quantity
BM11963201	360 degrees	5



Tryksprøjte Astro 5

Tryksprøjte til fortyndede syrer, svage alkalier og til oliebaseerede midler.

Leveres standard med:

Transparent plastbeholder, med 5 ltr. volumen. Sikkerheds-/aflastningsventil. Komfortabel bæresele. Stor påfyldningsåbning med integreret påfyldningstragt. 40 cm strålerør og justerbar dyse af plast. Integreret holder for strålerør.

Indhold: 5 ltr.

Pakning: Viton

Arbejdstryk: 3 bar.

Art.nr.	Emb.
BM11909201	1

Compression sprayer Astro 5

Compression sprayer for diluted acids, weak alkalis and for mineral oil based solvents.

Delivered with:

Transparent plastic tank with 5 ltr. filling volume. Safety valve. Comfortable carrying belt. Large filling opening with integrated funnel. 40 cm spray lance and adjustable plastic nozzle. Pump handle with integrated lance holder.

Capacity: 5 ltr.

Seal: Viton.

Operating pressure: 3 bar.

Art.#	Quantity
BM11909201	1

**Tryksprøjte Rondo-Matic 5**

Kvalitets tryksprøjte til de krævende opgaver inden for rengøring og desinfektion.

Leveres standard med:

40 cm strålerør af plast med justerbar dyse. Sikkerheds-/aflastningsventil. Komfortabel bæresele. Stor påfyldningsåbning med integreret påfyldningstragt. Niveauskala som viser aktuelt tankindhold. 1,2 mtr. højtryksslange. Integreret holder for strålerør.

Indhold: 5 ltr.

Pakning: Viton.

Arbejdstryk: 3 bar.

Art.nr.	Emb.
BM11622101	1

Compression sprayer Rondo-Matic 5

Compact compression sprayer for the demanding tasks in cleaning and disinfection.

Delivered with:

40 cm spray lance with angled adjustable nozzle made of polypropylene. Safety valve. Comfortable carrying belt. Large filling opening with integrated funnel. Imprinted filling scale in litres / US gallons. 1.2 mtr. pressure hose. Handle with integrated lance holder.

Capacity: 5 ltr.

Seal: Viton.

Operating pressure: 3 bar.

Art.#	Quantity
BM11622101	1

**Tryksprøjte Spray-Matic 5 P**

Tryksprøjte særlig egnet til formolie og olieholdige midler.

Leveres standard med:

Beholder i slagfast transparent plast og ltr. skala. Håndpumpe og trykluftstilslutning. Sikkerheds-/aflastningsventil. Kraftfuld pumpe med rustfri pumpe-pestang. Ventil for tilslutning af kompressor. Lanse i messing, 50 cm. buet, 1/4" samt 1,5 mtr. armeret slange. Fladstråledyse i messing. Stor påfyldningsåbning med integreret tragt.

Indhold: 5 ltr.

Pakning: Viton

Arbejdstryk: 4 bar.

Art.nr.	Emb.
BM11816201	1

Compression sprayer Spray-Matic 5 P

Top quality compression sprayer. Especially suitable for applying of form oil and lubricants.

Delivered with:

Impact resistant polyethylene tank, transparent with litre and US gallon scale. Safety valve. Powerful pump with stainless steel pump rod and sleeve guidance. Compressed air connection valve. 50 cm curved, brass lance 1/4" and 1.5 mtr. reinforced pressure hose. Brass fanjet nozzle. Large filling opening with integrated funnel.

Capacity: 5 ltr.

Seal: Viton.

Operating pressure: 4 bar.

Art.#	Quantity
BM11816201	1

**Tryksprøjte Spray-Matic 7 P**

Tryksprøjte særlig egnet til formolie og olieholdige midler.

Leveres standard med:

Beholder i slagfast transparent plast og ltr. skala. Håndpumpe og trykluftstilslutning. Sikkerheds-/aflastningsventil. Kraftfuld pumpe med rustfri pumpe-pestang. Ventil for tilslutning af kompressor. Lanse i messing, 50 cm. buet, 1/4" samt 1,5 mtr. armeret slange. Fladstråledyse i messing. Stor påfyldningsåbning med integreret tragt.

Indhold: 7 ltr.

Pakning: Viton

Arbejdstryk: 4 bar.

Art.nr.	Emb.
BM11816301	1

Compression sprayer Spray-Matic 7 P

Top quality compression sprayer. Especially suitable for applying of form oil and lubricants.

Delivered with:

Impact resistant Polyethylene tank, transparent with litre and US gallon scale. Safety valve. Powerful pump with stainless steel pump rod and sleeve guidance. Compressed air connection valve. 50 cm curved, brass lance 1/4" and 1.5 mtr. reinforced pressure hose. Brass fanjet nozzle. Large filling opening with integrated funnel.

Capacity: 7 ltr.

Seal: Viton.

Operating pressure: 4 bar.

Art.#	Quantity
BM11816301	1



Tryksprøjte Spray-Matic 5 S

Tryksprøjte i rustfrit stål. Med håndpumpe og ventil for tilslutning af kompressor. Konstrueret til og bestandig overfor olieholdige midler. CE mærket / TÜV og GS sikkerhedsgodkendt.

40 cm messing strålerør med 1/4" udv. gevind. Sikkerheds-/aflastningsventil. Stor separat påfyldningsåbning. Justerbar messingdyse. Bæresele. Messing håndpumpe. Manometer. Heavy-duty messing pistolgreb med integreret filter.

Indhold: 5 ltr.

Pakning: Viton.

Arbejdstryk: 6 bar.

Art.nr.	Emb.
BM11381701	1

Compression sprayer Spray-Matic 5 S

Stainless steel compression sprayer with hand pump and compressed-air connection. Designed and resistant to mineral oil based solvents. CE / TÜV and GS approved.

Brass spray lance 40 cm with 1/4" outer thread. Security valve. Separate, large filling opening. Adjustable brass nozzle. Carrying belt. Hand pump made of brass. Pressure gauge. Robust brass piston valve assembly with integrated fine filter.

Capacity: 5 ltr.

Seal: Viton.

Operating pressure: 6 bar.

Art.#	Quantity
BM11381701	1

**Tryksprøjte Spray-Matic 10 S**

Tryksprøjte i rustfrit stål. Med håndpumpe og ventil for tilslutning af kompressor. Konstrueret til og bestandig overfor olieholdige midler. CE mærket / TÜV og GS sikkerhedsgodkendt.

50 cm messing strålerør med 1/4" udv. gevind. Sikkerheds-/aflastningsventil. Stor separat påfyldningsåbning. Justerbar messingdyse. Bæresele. Messing håndpumpe. Manometer. Heavy-duty messing pistolgreb med integreret filter.

Indhold: 10 ltr.

Pakning: Viton.

Arbejdstryk: 6 bar.

Art.nr.	Emb.
BM11380002	1

Compression sprayer Spray-Matic 10 S

Stainless steel compression sprayer with hand pump and compressed-air connection. Designed and resistant to mineral oil based solvents. CE / TÜV and GS approved.

Brass spray lance 50 cm with 1/4" outer thread. Security valve. Separate, large filling opening. Adjustable brass nozzle. Carrying belt. Hand pump made of brass. Pressure gauge. Robust brass piston valve assembly with integrated fine filter.

Capacity: 10 ltr.

Seal: Viton.

Operating pressure: 6 bar.

Art.#	Quantity
BM11380002	1

**Ryggsprøjte Spray-Matic 10 B2**

Robust ryggsprøjte for bygge-entreprenører, industri og professionel rengøring af store arealer.

Ergonomisk udformet tank. Forstærket sokkelbund i rustfrit stål. Kraftige polstrede bæreseler med klik system. Ny forbedret pumpearms, kan monteres i både højre og venstre side. Længde-indstilleligt anatomisk udformet pumpehåndtag. Pistolgreb med integreret filter samt spærre- og fastholdelsesfunktion. 60 cm messing strålerør. 6 bar pumpetryk. Udvendig pumpe med mulighed for efterjustering af pumpepakninger. Robust og driftssikker.

Indhold: 10 ltr.

Pakning: Viton.

Arbejdstryk: 6 bar.

Art.nr.	Emb.
BM12052601	1

Backpack sprayer Spray-Matic 10 B2

Robust backpack sprayer for builders and contractors, industry and professional cleaning.

Ergonomically shaped tank. Stainless steel reinforced frame. Padded S-shaped carrying belts with click system. New improved pump lever. Left or right handed operation. Adjustable length handle, anatomically shaped and comfortable. Trigger with integrated fine filter. Locking and blocking function. 60 cm brass spray tube. 6 bar maximum pressure. Adjustable rubber piston ring. Robust and reliable brass pump, mounted externally.

Capacity: 10 ltr.

Seal: Viton.

Operating pressure: 6 bar.

Art.#	Quantity
BM12052601	1



Håndforstøver McProper Plus P

Professionel kemikalie resistent højkvalitetssprøjte med en kraftfuld udløserpumpe og justerbar dyse. Egnet til fortyndede syrer.

Indhold: 0,5 ltr.

Pakning: Viton.

Stempeltryk: op til 15 bar.

Art.nr.	Rotation	Emb.
BM11815001	Normal	20
BM11984001	360 grader	20

Hand sprayer McProper Plus P

Professional chemical resistant high-quality sprayer with a powerful trigger pump and adjustable nozzle. Suitable for diluted acids.

Capacity: 0.5 ltr.

Seal: Viton.

Piston pressure: up to 15 bar.

Art.#	Rotation	Quantity
BM11815001	Normal	20
BM11984001	360 degrees	20

**Håndforstøver McProper Plus P Skum**

Professionel kemikalie resistent højkvalitetssprøjte med en kraftfuld udløserpumpe. Egnet til fortyndede syrer. Skumhoved minimerer risiko for aerosoler.

Indhold: 0,5 ltr.

Pakning: Viton.

Stempeltryk: op til 15 bar.

Art.nr.	Rotation	Emb.
BM11984801	360 grader	20

Hand sprayer McProper Plus P Foam

Professional chemical resistant high-quality sprayer with a powerful trigger pump. Suitable for diluted acids. Foam head minimizes the risk of aerosols.

Capacity: 0.5 ltr.

Seal: Viton.

Piston pressure: up to 15 bar.

Art.#	Rotation	Quantity
BM11984801	360 degrees	20

**Tryksprøjte Clean-Matic 1,25 P**

Håndholdt kompressionssprøjte til professionel rengøring og desinfektion. Lavet af kemikalie resistent plast og syrefast rustfrit stål. Egnet til syre med pH værdi fra 1-7.

Fladstråledyse med rustfri stål indsats.

Sikkerheds-/aflastningsventil.

Indhold: 1,25 ltr.

Pakning: Viton.

Stempeltryk: 3 bar.

Art.nr.	Rotation	Emb.
BM11975301	360 grader	1

Compression sprayer Clean-Matic 1.25 P

Hand compression sprayer for professional cleaning and disinfection. Made of chemical resistant polyethylene and acid proof stainless steel. Suitable for acid with a pH value from 1-7.

Fanjet nozzle with stainless steel insert.

Safety valve and lockable push-button.

Capacity: 1.25 ltr.

Seal: Viton.

Piston pressure: 3 bar.

Art.#	Rotation	Quantity
BM11975301	360 degrees	1

**Skumsprøjte Foam-Matic 1,25 P**

Professionel håndholdt skumudlægger. Giver en meget speciel og tør skum (lang kontakttid).

Beholder i polyethylen med liter skala og stor påfyldningsåbning. Kraftfuld håndpumpe med ergonomisk håndtag og låsbar spray-knap. Sikkerheds-/aflastningsventil. Speciel skum dyse med indstilling for horisontal og vertikal udlægning.

Indhold: 1,25 ltr.

Pakning: Viton.

Stempeltryk: 3 bar.

Art.nr.	Rotation	Emb.
BM11976501	0 - 75 grader	1

Foam unit Foam-Matic 1.25 P

Top quality hand compression foamer. Produces a very special and dry foam (long contact time).

Polyethylene tank, transparent with litre scale and large filling opening. Powerful hand pump with ergonomic handle and spray button. Safety valve, lockable push-button. Special foam nozzle for directed foaming.

Capacity: 1.25 ltr.

Seal: Viton.

Piston pressure: 3 bar.

Art.#	Rotation	Quantity
BM11976501	0 - 75 degrees	1

**Tryksprøjte Rondo-Matic 5 P**

Kvalitets 5 ltr. tryksprøjte til de krævende opgaver inden for rengøring og auto, samt industrien. Kemikaliebestandig tryksprøjte produceret i syrebestandige materialer. (syre pH fra 1-7).

Beholder i slagfast polyethylen HD-PP med liter skala. Stor påfyldningsåbning med integreret tragt. Lanse 40 cm. i syrefast rustfrit stål. Vinklet justerbar dyse i PP materiale og rustfrit stål. 1,5 mtr. kemikaliebestandig slange. Pumpe i PP materiale og rustfrit stål. Sikkerheds-/aflastningsventil. Bæresele.

Indhold: 5 ltr.

Pakning: Viton.

Arbejdsdruk: 3 bar.

Art.nr.	Emb.
BM11907501	1

Compression sprayer Rondo-Matic 5 P

High-quality compression sprayer for the demanding cleaning tasks. Compact compression sprayer with maximum chemical resistance against strong acids (acid pH from 1-7).

Impact resistant polyethylene tank, transparent with litre and US gallon scale. Large filling opening with integrated funnel. 40 cm acid proof stainless steel spray lance with angled adjustable nozzle made of polypropylene and stainless steel. 1.5 mtr. chemical resistant pressure hose. Pump with stainless steel pump rod. Safety valve. Carrying belt.

Capacity: 5 ltr.

Seal: Viton.

Operating pressure: 3 bar.

Art.#	Quantity
BM11907501	1



Tryksprøjte Clean-Matic 5 P

Tryksprøjte i kemikalie resistent plast særdeles egnet til rengøring og desinfektion. Med håndpumpe og trykluftstilslutning.

Leveres standard med:

Strålerør i rustfri stål, 50 cm, 1/4" udv. Justerbar fladstråledyse i plast. Sikkerheds-/aflastningsventil. Bæresele. Integreret påfyldningstragt. Niveauskala som viser aktuel tank indhold. 1,5 mtr. armeret slange. Letløbende og kraftfuld håndpumpe, med stempelstang i rustfri stål.

Indhold: 5 ltr.

Pakning: Viton.

Arbejdstryk: 4 bar.

Art.nr.	Emb.
BM11664901	1

Compression sprayer Clean-Matic 5 P

Compression sprayer with metal parts of stainless steel for professional cleaning and disinfection. With hand pump and compressed air connection valve.

Delivered with:

50 cm acid proof stainless steel lance. Adjustable fanjet nozzle. Safety valve. Comfortable carrying belt. Large filling opening with integrated funnel. Impact resistant polyethylene tank with litre scale. 1.5 mtr. reinforced pressure hose. Ergonomic and powerful pump with stainless steel pump rod. Capacity: 5 ltr.

Seal: Viton.

Operating pressure: 4 bar.

Art.#	Quantity
BM11664901	1

**Skumsprøjte Foam-Matic 5 P**

Fleksibel, og mobil 5 ltr. skumsprøjte med en fremragende skumkvalitet, og høj ydeevne.

Trykluftventil for kompressortilslutning. Beholder i slagfast polyethylen, forstærket sokkel og liter skala. Stor påfyldningsåbning med integreret tragt. Pumpe med to-hånds greb og pumpestang i rustfrit stål. Sikkerheds-/aflastningsventil. Bæresele. 1,5 mtr. armeret slange. Speciel skumdyse med indstilling for horisontal og vertikal udlægning.

Indhold: 5 ltr.

Pakninger: Viton.

Arbejdstryk: 4 bar.

Art.nr.	Emb.
BM11900401	1

Foam unit Foam-Matic 5 P

Mobile foaming: fast with excellent foam quality and high performance.

Compressed air connection valve. Impact resistant Polyethylene tank, robust tank base for very good stability. Imprinted scale in litres and US Gallons and large filling opening with integrated funnel. Hand pump with two hand grip and stainless steel pump rod. Safety valve. Carrying belt. 1.5 m reinforced pressure hose. Special short foam gun.

Capacity: 5 ltr.

Seal: Viton.

Operating pressure: 4 bar.

Art.#	Quantity
BM11900401	1

**Tryksprøjte Spray-Matic 10 SP**

Med håndpumpe af rustfrit stål og trykluftstilslutning.

Verdens eneste tryksprøjte i rustfrit stål med indvendig tank i plast for høj kemikalieresistens. Særdeles velegnet til de mest krævende opgaver med for eksempel klorholdige produkter.

Lanse i rustfrit stål og fladstråledyse i plast. Sikkerheds-/aflastningsventil samt manometer. Som ekstraudstyr anbefales vogn i rustfrit stål.

Indhold: 10 ltr.

Pakning: Viton.

Arbejdstryk: 6 bar.

Art.nr.	Emb.
BM11380001	1

Compression sprayer Spray-Matic 10 SP

With stainless steel hand pump and compressed-air connection.

The world's only stainless steel compression sprayer with inner tank in plastic for high chemical resistance. Ideal for the most demanding tasks, for example chlorine-containing products.

Stainless steel spray lance and fanjet nozzle in plastic. Security valve. Pressure gauge. As accessory we recommend the hand cart in high grade steel.

Capacity: 10 ltr.

Seal: Viton.

Operating pressure: 6 bar.

Art.#	Quantity
BM11380001	1

**Tryksprøjte Spray-Matic 10 SP**

Med trykluftstilslutning.

Verdens eneste tryksprøjte i rustfrit stål med indvendig tank i plast for høj kemikalieresistens. Særdeles velegnet til de mest krævende opgaver med for eksempel klorholdige produkter.

Lanse i rustfrit stål og fladstråledyse i plast. Sikkerheds-/aflastningsventil samt manometer. Som ekstraudstyr anbefales vogn i rustfrit stål.

Indhold: 10 ltr.

Pakning: Viton.

Arbejdstryk: 6 bar.

Art.nr.	Emb.
BM11905701	1

Compression sprayer Spray-Matic 10 SP

With compressed-air connection.

The world's only stainless steel compression sprayer with inner tank in plastic for high chemical resistance. Ideal for the most demanding tasks, for example chlorine-containing products.

Stainless steel spray lance and fanjet nozzle in plastic. Security valve. Pressure gauge. As accessory we recommend the hand cart in high grade steel.

Capacity: 10 ltr.

Seal: Viton.

Operating pressure: 6 bar.

Art.#	Quantity
BM11905701	1



Håndforstøver McProper blå

Professionel kemikalie resistent høj kvalitetssprøjte med en kraftfuld udløserpumpe og justerbar dyse. Eget til fortyndede alkaliske midler.

Indhold: 0,5 ltr.

Pakning: EPDM.

Stempeltryk: op til 15 bar.

Art.nr.	Emb.
BM11815002	20

Hand sprayer McProper blue

Professional chemical resistant high-quality sprayer with a powerful trigger pump and adjustable nozzle. Suitable for diluted alkaline products.

Capacity: 0.5 ltr.

Seal: EPDM.

Piston pressure: up to 15 bar.

Art.#	Quantity
BM11815002	20

**Håndforstøver McProper Plus E**

Professionel kemikalie resistent høj kvalitetssprøjte med en kraftfuld udløserpumpe og justerbar dyse. Eget til fortyndede alkaliske midler.

Indhold: 0,5 ltr.

Pakning: EPDM.

Stempeltryk: op til 15 bar.

Art.nr.	Rotation	Emb.
BM11985001	360 grader	20

Hand sprayer McProper Plus E

Professional chemical resistant high-quality sprayer with a powerful trigger pump and adjustable nozzle. Suitable for diluted alkaline products.

Capacity: 0.5 ltr.

Seal: EPDM.

Piston pressure: up to 15 bar.

Art.#	Rotation	Quantity
BM11985001	360 degrees	20

**Håndforstøver McProper Plus Skum blå**

Professionel kemikalie resistent høj kvalitetssprøjte med en kraftfuld udløserpumpe og justerbar dyse. Eget til fortyndede alkaliske midler.

Skumhoved minimerer risiko for aerosoler.

Indhold: 0,5 ltr.

Pakning: EPDM.

Stempeltryk: op til 15 bar.

Art.nr.	Rotation	Emb.
BM11984901	360 grader	20

Hand sprayer McProper Plus Foam blue

Professional chemical resistant high-quality sprayer with a powerful trigger pump and adjustable nozzle. Suitable for diluted alkaline products.

Foam head minimizes the risk of aerosols.

Capacity: 0.5 ltr.

Seal: EPDM.

Piston pressure: up to 15 bar.

Art.#	Rotation	Quantity
BM11984901	360 degrees	20

**Tryksprøjte Clean-Matic 1,25 E**

Håndholdt kompressionssprøjte til professionel rengøring og desinfektion. Lavet af kemikalie resistent plast og rustfrit stål. Eget til alkaliske midler pH værdi fra 7-14.

Fladstråledyse med rustfri stål indsats.

Sikkerheds-/aflastningsventil.

Indhold: 1,25 ltr.

Pakning: EPDM.

Stempeltryk: 3 bar.

Art.nr.	Rotation	Emb.
BM11975401	360 grader	5

Compression sprayer Clean-Matic 1.25 E

Hand compression sprayer for professional cleaning and disinfection. Made of chemical resistant polyethylene and stainless steel. Suitable for alkalis with a pH value from 7-14.

Fanjet nozzle with stainless steel insert.

Safety valve and lockable push-button.

Capacity: 1.25 ltr.

Seal: EPDM.

Piston pressure: 3 bar.

Art.#	Rotation	Quantity
BM11975401	360 degrees	5

**Skumsprøjte Foam-Matic 1,25 E**

Professionel håndholdt skumudlægger. Giver en meget speciel og tør skum (lang kontakttid).

Beholder i polyethylen med liter skala og stor påfyldningsåbning. Kraftfuld håndpumpe med ergonomisk håndtag og låsbar spray-knap. Sikkerheds-/aflastningsventil. Speciel skum dyse med indstilling for horisontal og vertikal udlægning.

Indhold: 1,25 ltr.

Pakning: EPDM.

Stempeltryk: 3 bar.

Art.nr.	Rotation	Emb.
BM11976601	0 - 75 grader	1

Foam unit Foam-Matic 1.25 E

Top quality hand compression foamer. Produces a very special and dry foam (long contact time).

Polyethylene tank, transparent with litre scale and large filling opening. Powerful hand pump with ergonomic handle and spray button. Safety valve, lockable push-button. Special foam nozzle for directed foaming.

Capacity: 1.25 ltr.

Seal: EPDM.

Piston pressure: 3 bar.

Art.#	Rotation	Quantity
BM11976601	0 - 75 degrees	1



Trykspøjte Rondo-Matic 5 E

Kvalitets 5 ltr. trykspøjte til de krævende opgaver inden for rengøring og auto. Egnede til alkaliske midler pH værdi fra 7-14.

Beholder i slagfast polyethylen HD-PP med liter skala. Stor påfyldningsåbning med integreret tragt. Lanse 40 cm. i rustfrit stål. Vinklet justerbar dyse i PP materiale og rustfrit stål. 1,5 mtr. kemikaliebe-standig slange. Pumpe i PP materiale og rustfrit stål. Sikkerheds-/aflastningsventil. Bæresele.

Indhold: 5 ltr.

Pakning: EPDM.

Arbejdstryk: 3 bar.

Art.nr.	Emb.
BM11802201	1

Compression sprayer Rondo-Matic 5 E

High-quality 5 ltr. compression sprayer for the demanding cleaning tasks. Suitable for alkalis with a pH value from 7-14.

Impact resistant polyethylene tank, transparent with litre and US gallon scale. Large filling opening with integrated funnel. 40 cm stainless steel spray lance with angled adjustable nozzle made of polypropylene and stainless steel. 1.5 mtr. chemical resistant pressure hose. Pump with stainless steel pump rod. Safety valve. Carrying belt.

Capacity: 5 ltr.

Seal: EPDM.

Operating pressure: 3 bar.

Art.#	Quantity
BM11802201	1

**Trykspøjte Clean-Matic 5 E**

Trykspøjte i kemikalie resistent plast særdeles egnet til rengøring og desinfektion. Med håndpumpe og trykluftstilslutning. Egnede til alkaliske midler pH værdi fra 7-14.

Leveres standard med:

Strålerør i rustfri stål, 50 cm, 1/4" udv. Justerbar fladstråledyse i plast. Sikkerheds-/aflastningsventil. Bæresele. Integreret påfyldningstragt. Niveauskala som viser aktuell tank indhold. 1,5 mtr. armeret slange. Letløbende og kraftfuld håndpumpe, med stempelstang i rustfri stål.

Indhold: 5 ltr.

Pakning: EPDM.

Arbejdstryk: 4 bar.

Art.nr.	Emb.
BM11907401	1

Compression sprayer Clean-Matic 5 E

Compression sprayer with metal parts of stainless steel for professional cleaning and disinfection. With hand pump and compressed air connection valve. Suitable for alkalis with a pH value from 7-14.

Delivered with:

50 cm acid proof stainless steel lance. Adjustable fanjet nozzle. Safety valve. Comfortable carrying belt. Large filling opening with integrated funnel. Impact resistant polyethylene tank with litre scale. 1.5 mtr. reinforced pressure hose. Ergonomic and powerful pump with stainless steel pump rod.

Capacity: 5 ltr.

Seal: EPDM.

Operating pressure: 4 bar.

Art.#	Quantity
BM11907401	1

**Skumspøjte Foam-Matic 5 E**

Fleksibel og mobil professionel skumudlægger med fremragende skumkvalitet og høj ydeevne.

Trykluftventil for kompressortilslutning. Beholder i slagfast polyethylen med forstærket sokkel og skala med liter skala samt stor påfyldningsåbning med integreret tragt. Pumpe med to-hånds greb for let oppumpning og pumpestang i rustfrit stål. Sikkerheds-/aflastningsventil. Bæresele. 1,5 mtr. armeret slange. Speciel skumdyse med indstilling for horisontal og vertikal udlægning.

Indhold: 5 ltr.

Pakninger: EPDM.

Arbejdstryk: 4 bar.

Art.nr.	Emb.
BM11907601	1

Foam unit Foam-Matic 5 E

Mobile foaming: fast with excellent foam quality and high performance.

Compressed air connection valve. Impact resistant Polyethylene tank, robust tank base for very good stability. Imprinted scale in litres and US Gallons and large filling opening with integrated funnel. Hand pump with two hand grip and stainless steel pump rod. Safety valve. Carrying belt. 1.5 m reinforced pressure hose. Special short foam gun.

Capacity: 5 ltr.

Seal: EPDM.

Operating pressure: 4 bar.

Art.#	Quantity
BM11907601	1



Food-Matic 1.25 P med fladstråledyse

Professionel tryksprayer, godkendt til kontakt med fødevarer. Sprayeren overholder følgende EU bekendtgørelser vedrørende kontakt med fødevarer: (EF) 1935/2004, (EF) 10/2011, (EF) 2023/2006.

Ergonomisk og effektiv håndpumpe. Med fladstråledyse af rustfrit stål samt sikkerheds- og aflastningsventil. Dysens udformning gør sprayeren særligt velegnet til madolie.

Indhold: 1,25 ltr.

Stempeltryk: 3 bar.

Art.nr. Emb.

BM11989801 1

Food-Matic 1.25 P with fanjet nozzle

Professional compression sprayer, approved for the contact with food. Confirmation of conformity for contact with foodstuff (EC) 1935/2004, (EC) 10/2011, (EC) 2023/2006.

Ergonomic and efficient hand pump. Fanjet nozzle of stainless steel. Protected safety and pressure release valve. The design of the nozzle makes the sprayer particularly suitable for cooking oil.

Capacity: 1.25 ltr.

Piston pressure: 3 bar.

Art.# Quantity

BM11989801 1

**Food-Matic 1.25 P med justerbar dyse**

Professionel tryksprayer, godkendt til kontakt med fødevarer. Sprayeren overholder følgende EU bekendtgørelser vedrørende kontakt med fødevarer: (EF) 1935/2004, (EF) 10/2011, (EF) 2023/2006.

Ergonomisk og effektiv håndpumpe. Med justerbar dyse samt sikkerheds- og aflastningsventil.

Indhold: 1,25 ltr.

Stempeltryk: 3 bar.

Art.nr. Emb.

BM11990801 1

Food-Matic 1.25 P with adjustable nozzle

Professional compression sprayer, approved for the contact with food. Confirmation of conformity for contact with foodstuff (EC) 1935/2004, (EC) 10/2011, (EC) 2023/2006.

Ergonomic and efficient hand pump. Adjustable nozzle. Protected safety and pressure release valve.

Capacity: 1.25 ltr.

Piston pressure: 3 bar.

Art.# Quantity

BM11990801 1

**Håndsprayer Grill Star 0.5**

Håndsprayer, godkendt til kontakt med fødevarer. Velegnet til madlavning, både indendørs og uden-dørs ved grillen. Sprayeren overholder følgende EU bekendtgørelser vedrørende kontakt med fødevarer: (EF) 1935/2004, (EF) 10/2011, (EF) 2023/2006.

Hygienisk emballeret (leveres forseglet i PO-folie). Sprøjtehoved af høj kvalitet. Justerbar dyse med et fint sprøjtemønster. Slagbestandig og gennemsigtig plastbeholder.

Indhold: 0,5 ltr.

Art.nr. Emb.

BM12086501 1

Hand sprayer Grill Star 0.5

Hand sprayer, approved for the contact with food. Suitable for contact with food while barbequing, roasting, baking, grilling and frying. Confirmation of conformity for contact with foodstuff (EC) 1935/2004, (EC) 10/2011, (EC) 2023/2006.

Hygienically packed (comes sealed in PO foil). High quality spray head. Adjustable nozzle with a fine spraying pattern. Impact resistant and transparent plastic tank.

Capacity: 0.5 ltr.

Art.# Quantity

BM12086501 1



Sprøjteskærm

Oval sprøjteskærm med integreret fladstråledyse. Passer til alle sprøjter med 1/4" dysetilslutning. Anvendes for at undgå sprøjtning med ukrudtsmiddel på nærliggende områder. Med sprøjtekappen kan sprøjtningen afgrænses skarpt og præcist.

Arbejdstryk område: 1,5 - 6 bar.
80° messing fladstråledyse.
Dimensioner: 37 x 14 cm, oval.
Dyse kapacitet 0,6 ltr./min. ved 2 bar.
Dyse kapacitet 0,9 ltr./min. ved 4 bar.

Art.nr. Emb.
BM10501606 1

Spray hood

Oval spray hood with integrated fanjet nozzle. Fits all sprayers with a 1/4" connection. In order to prevent unwanted drifting of herbicides, spray hoods limit the spraying area. With the spray hood mounted, spraying will be sharp and precise.

Pressure range: 1.5 - 6 bar.
Brass fanjet nozzle 80°.
Hood dimension: 37 x 14 cm, oval.
Flow rate 0.6 ltr./min. at 2 bar.
Flow rate 0.9 ltr./min. at 4 bar.

Art.# Quantity
BM10501606 1

**Sprøjteskærm Rund, ø12,5 cm**

Passer til alle sprøjter med indstik tilslutning (Plug-in). Anvendes for at undgå sprøjtning med ukrudtsmiddel på nærliggende områder. Med sprøjtekappen kan sprøjtningen afgrænses skarpt og præcist. Arbejdstryk område: 1 - 4 bar. Dimensioner: ø12,5 cm x 11 cm. Kapacitet: 0,83 ltr./min. ved 2 bar.

Art.nr. Emb.
BM11864801 1

Spray hood Round, ø12.5 cm

Fits all sprayers with plug-in connection. In order to prevent unwanted drifting of herbicides, spray hoods limit the spraying area. With the spray hood mounted, spraying will be sharp and precise. Pressure range: 1 - 4 bar. Dimensions: ø12.5 cm x 11 cm. Capacity: 0.83 ltr./min. at 2 bar.

Art.# Quantity
BM11864801 1

**Ukrudtsdyse 1,6mm Floodjet**

Ideelt til sprøjtning med ukrudtsmiddel til dækning af store arealer, giver en stor spray mængde. Vifte radius er afhængig af drifttryk. Dyse indsats i plast og omløber i messing.

Arbejdstryk område: 0,5 - 2 bar.
Tilslutning: 1/4"R.
Diameter: 1,6 mm åbning.
Sprøjteinkel: 160° (varierer med drifttryk).


Art.nr. Emb.
BM10501803-SB 1

Herbicide Floodjet nozzle 1.6mm, blue

For wider areas with large spray volumes. The spraying angle depends on the operating pressure. The large droplets lead to a low drift pattern and a well defined spray area. Angle nozzle, plastic.

Pressure range 0.5 - 2 bar.
Brass thread fitting G 1/4".
Diameter opening: 1.6 mm.
Spraying angle: 160° (varies w/ operating pressure).

Art.# Quantity
BM10501803-SB 1

**Forlængerrør til lanse**

Forlængerrør af messing. Længde: 1 mtr. Tilslutning: 1/4" indv. x 1/4" udv.

Art.nr. Emb.
BM10960601 1

Extension tube for lance

Extension tube straight made of brass. Length: 1 mtr. Connection: 1/4" (M) x 1/4" (F).

Art.# Quantity
BM10960601 1

**Teleskop forlængerrør til lanse**

Teleskop forlængerrør af messing. Længde: 1-2 mtr. Tilslutning: 1/4" udv. x 1/4" udv.

Art.nr. Emb.
BM10985201 1

Telescopic extension tube for lance

Telescopic extension tube of brass. Length: 1-2 mtr. Connection: 1/4" (M) x 1/4" (M).

Art.# Quantity
BM10985201 1

**Strålerør til lanse, 1 mtr.**

For Rondo-Matic 5E/P. Lavet af kvalitets stål. Længde: 1 mtr. Tilslutning: indstik.

Art.nr. Emb.
BM11310412 1

Spray tube for lance, 1 mtr.

For Rondo-Matic 5E/P. Made of high grade steel. Length: 1 mtr. Connection: plug.

Art.# Quantity
BM11310412 1

**Teleskoprør for XL 8 D, 7 mtr.**

XL 8 D teleskopisk lanse 7 mtr. Den ultimative udvidelse til sprøjtning. Arbejdshøjde 8 mtr. Teleskop glasfiber lanse interval fra 1,5 mtr. til 7 mtr. 7 sektioner. Kompakt 1,3 mtr. lang transport taske. Samlet vægt på 1,5 kg. Passer til DR5 / REC15.

Art.nr. Emb.
BM11935401 1

XL 8 D Telescopic lance, 7 mtr.

The ultimate extension for dusting. Working height 8 mtr. Telescopic fibreglass lance range from 1.5 mtr. to 7 mtr. 7 sections. Stores into a compact 1.3 mtr. long carrying bag. Overall weight of 1.5 kg. For DR5 / REC15.

Art.# Quantity
BM11935401 1



Dysesæt for XL 8 D

Passer til REC15.

Art.nr.	Emb.
BM11938901	1

XL 8 D Spray set

For REC15.

Art.#	Quantity
BM11938901	1

**Forlængerrør sæt 50 cm**

Forlængerrørssæt i rustfrit stål med pakninger og omløbere. For alle Foam-Matic 5 P/E modeller.

Art.nr.	Emb.
BM11904501	1

Extension tube set 50 cm

Extension tube set 50 cm. Stainless steel, curved. For all Foam-Matic 5 P/E sprayers.

Art.#	Quantity
BM11904501	1

**Mini Flex slange for DR 5**

Mini-Flex slange for DR5. Den fleksible udvidelse til pudring. Pulver rør. Længde 54 cm.

Art.nr.	Emb.
BM11947101	1

Mini Flex for DR 5

The flexible extension for dusting. Powder tube. Length 54 cm.

Art.#	Quantity
BM11947101	1

**Sprøjteboom, aluminium med 4 dyser**

Med spredeboomen kan større arealer dækkes, hurtigt enkelt og bekvemt. Integreret filter si for hver enkelt dyse forhindrer at dyserne stopper til. 4 stk. 110° dyser. Bredde 1 mtr.

Flow rate pr. dyse 0,65 ltr./min ved 2 bar.

Flow rate pr. dyse 0,91 ltr./min ved 4 bar.

Inkl. adapter 1/4" gevind.

Art.nr.	Emb.
BM11889501-SB	1

Spray boom, aluminium with 4 nozzles

With the spray boom large areas can be processed within a short time. Each nozzle has an integrated filter strainer.

4 fanjet nozzles 110°. Boom width 1 mtr.

Flow rate per nozzle 0.65 ltr./min with 2 bar.

Flow rate per nozzle 0.91 ltr./min with 4 bar.

Incl. adapter G1/4".

Art.#	Quantity
BM11889501-SB	1

**Transportvogn**

Passer til alle 10 ltr. S og SP modeller.

(BM11380001, BM11380002 og BM11905701).

Art.nr.	Emb.
BM11801501	1

Hand cart

Hand cart assy. For all 10 ltr. S and SP sprayers.

(BM11380001, BM11380002 and BM11905701).

Art.#	Quantity
BM11801501	1

**Skumpistol Vario-Matic 1,25 PE**

Robust skumpistol til rengøring og desinfektion. Arbejder med normalt vandtryk (1,5-6 bar).

1,25 ltr. transparent beholder med niveauskala og tabel med blandingsforhold. Højtydende justerbar skum dyse. Lynkobling for enkel og hurtig vandtilkobling. Ingen dele af messing. Integreret udvendig indstillingsgreb af dosering: 1,5% / 2,5% / 5,0% / 10% eller kun vand. Robust pistolgreb og indbygget tilbageslagsventil.

Art.nr.	Emb.
BM11975001	1

Foam gun Vario-Matic 1.25 PE

Robust foam gun for cleaning and disinfecting. Uses normal water pressure (1.5-6 bar).

1.25 ltr. tank in transparent white, with litre scale and mixing table. High-performance adjustable foam nozzle. Quick connector for easy water supply. Free of brass parts. Integrated mixing ratio dial with four different mixing ratio settings of 1.5% / 2.5% / 5.0% / 10% or just water. Robust trigger with non-return valve.

Art.#	Quantity
BM11975001	1



KABI Tragt model 1215 (PE)

Rød standard excl. si.

Resistent overfor: svovlsyre 40%, saltsyre 35%, Fluorsyre 20% samt eddikesyrekoncentrat.

Art.nr.	Diameter	Udløbsdia.	Emb.
KZ1215-50	ø50mm	ø10mm	1
KZ1215-75	ø75mm	ø12mm	1
KZ1215-90	ø90mm	ø12mm	1
KZ1215-120	ø120mm	ø15mm	1
KZ1215-150	ø150mm	ø15mm	1
KZ1215-200	ø200mm	ø22mm	1
KZ1215-250	ø250mm	ø24mm	1

KABI Funnel model 1215 (PE)

Rød standard excl. strainer.

Resistant to: Sulfuric acid 40%, Hydrochloric acid 35%, Fluoric acid 20% and acetic acid concentrate.

Art.#	Diameter	Outlet dia.	Quantity
KZ1215-50	ø50mm	ø10mm	1
KZ1215-75	ø75mm	ø12mm	1
KZ1215-90	ø90mm	ø12mm	1
KZ1215-120	ø120mm	ø15mm	1
KZ1215-150	ø150mm	ø15mm	1
KZ1215-200	ø200mm	ø22mm	1
KZ1215-250	ø250mm	ø24mm	1

**Tragtsæt model 1219**

4 stk. i sæt (ø50, ø75, ø90 & ø120mm).

Art.nr.	Emb.
KZ1219	1

Funnel kit model 1219

4 funnels (ø50, ø75, ø90 & ø120mm).

Art.#	Quantity
KZ1219	1

**KABI Tragt model 1214 (PP)**

Orange basic. Inkl. metal si til visse størrelser. Tragte fra ø50mm til ø250mm.

Art.nr.	Diameter	Udløbsdia.	Si	Emb.
KZ1214-50	ø50mm	ø9mm		1
KZ1214-75	ø75mm	ø10mm		1
KZ1214-100	ø100mm	ø11mm		1
KZ1214-120	ø120mm	ø15mm		1
KZ1214-150	ø150mm	ø16mm		1
KZ1214-200	ø200mm	ø20mm	Ja	1
KZ1214-250	ø250mm	ø22mm	Ja	1

KABI Funnel model 1214 (PP)

Orange basic. Inkl. metal strainer for some sizes. Funnels from ø50mm to ø250mm.

Art.#	Diameter	Outlet dia.	Strainer	Quantity
KZ1214-50	ø50mm	ø9mm		1
KZ1214-75	ø75mm	ø10mm		1
KZ1214-100	ø100mm	ø11mm		1
KZ1214-120	ø120mm	ø15mm		1
KZ1214-150	ø150mm	ø16mm		1
KZ1214-200	ø200mm	ø20mm	Yes	1
KZ1214-250	ø250mm	ø22mm	Yes	1

**KABI Tragtesæt model 1214 (PP)**

Orange basic, excl. si.

Art.nr.	Indhold	Emb.
KZ1216	ø50, ø75, ø100, ø120	1
KZ1217	ø50, ø75, ø100, ø120, ø150	1
KZ1218	ø50, ø75, ø100, ø120, ø150, ø160	1

KABI Funnel kit model 1214 (PP)

Orange basic, excl. strainer.

Art.#	Contains	Quantity
KZ1216	ø50, ø75, ø100, ø120	1
KZ1217	ø50, ø75, ø100, ø120, ø150	1
KZ1218	ø50, ø75, ø100, ø120, ø150, ø160	1



KZ1217

KABI Tragt model 1315

Med 90mm høj kant. Med plast si.

Art.nr.	Diameter	Udløbsdia.	Emb.
KZ1315	ø220mm	ø22mm	1

KABI Funnel model 1315

With 90mm high rim. With plastic strainer.

Art.#	Diameter	Outlet dia.	Quantity
KZ1315	ø220mm	ø22mm	1

**KABI Special tragt med metal si**

Fleksibel lige aftageligt udløbsrør.

Art.nr.	Diameter	Udløbsdia.	Emb.
KZ1454	ø200mm	ø19mm	1

KABI Special Funnel with metal strainer

Flexible straight outlet tube.

Art.#	Diameter	Outlet dia.	Quantity
KZ1454	ø200mm	ø19mm	1

**KABI Special tragt med metal si**

Vinkeltragt, fleksibel aftagelig udløbsrør.

Art.nr.	Diameter	Udløbsdia.	Emb.
KZ1449	ø200mm	ø19mm	1

KABI Special funnel with metal strainer

Angular funnel, flex. removable outlet tube.

Art.#	Diameter	Outlet dia.	Quantity
KZ1449	ø200mm	ø19mm	1

**KABI Special tragt med metal si**

Vinkeltragt med fast rør.

Art.nr.	Diameter	Emb.
KZ1456	ø200mm	1

KABI Special funnel with metal strainer

Angular funnel with fixed outlet tube.

Art.#	Diameter	Quantity
KZ1456	ø200mm	1



Tilbehør / Accessories

Art.nr. / Art.# Sier og Flexrør / Strainers and Flexible tubes

KZ1215SI-1 Sier af messing / Brass Strainers for KZ1454, KZ1449 & KZ1456 tragte / funnels

KZ1215SI-2 Sier af plast / Plastic Strainers for KZ1215-150, -200, -250 mm tragte / funnels

48178 Si/låsering for metal tragt / Strainer/locking ring for iron funnel

KZ1449F Flexrør, løst for KZ1454 & KZ1449, Længde 41cm. Udløbsdiameter ø19mm / Flexible tube for KZ1454 & KZ1449, Length 41cm. Outlet diameter ø19mm



KZ1215SI-1



KZ1449F

KABI Tromletragt med låg

Tromletragt i polyethylen (PE).
For 200 ltr. tromler.

Art.nr.	Diameter	Emb.
60100	ø680mm	1

KABI Funnel with lid, for drums

Polyethylene (PE) funnel for drums.
For 200 ltr. drums.

Art.#	Diameter	Quantity
60100	ø680mm	1

**Tragt af hvid Polyethylen (PP)**

Uden si.

Art.nr.	Diameter	Udløbsdia.	Emb.
48146	ø360mm	ø31mm	1

Funnel of white Polyethylene (PP)

Excl. strainer.

Art.#	Diameter	Outlet dia.	Quantity
48146	ø360mm	ø31mm	1

**Tragt af varm-galvaniseret stål**

Er inkl. metal si og låsring.

Art.nr.	Diameter	Udløbsdia.	Emb.
48215	ø200mm	ø28mm	1
48235	ø240mm	ø28mm	1
48238	ø300mm	ø28mm	1

Funnel in hot-dip galvanized steel

Incl. metal strainer and locking ring.

Art.#	Diameter	Outlet dia.	Quantity
48215	ø200mm	ø28mm	1
48235	ø240mm	ø28mm	1
48238	ø300mm	ø28mm	1

**Metal si og låsring**

For tragt af varm-galvaniseret stål.

Art.nr.	Emb.
48178	1

Metal strainer and locking ring

For funnel in hot-dip galvanized steel.

Art.#	Quantity
48178	1



KABI målebæger i PP plast

Litermål med ml. deling og hank.

Kan anvendes til Olie, Vand, Frostvæske, Sprinkler-væske, PH neutrale væsker, Diesel og Petroleum.

Er godkendt til fødevarer.

Alle modeller er stabelbare.

Art.nr.	Indhold	Emb.
KZ1470-01	0,10 ltr.	12
KZ1470-025	0,25 ltr.	12
KZ1470-05	0,50 ltr.	12
KZ1470-1	1,00 ltr.	12
KZ1470-2	2,00 ltr.	12
KZ1470-3	3,00 ltr.	12
KZ1470-5	5,00 ltr.	6

KABI Graduated measuring jugs in PP

Measure in ml. on both sides and with handle.

Can be used for oil, water, antifreeze, Washer fluid, PH neutral liquids, Diesel and Kerosene.

Approved for contact with food.

All sizes are stackable.

Art.#	Capacity	Quantity
KZ1470-01	0.10 ltr.	12
KZ1470-025	0.25 ltr.	12
KZ1470-05	0.50 ltr.	12
KZ1470-1	1.00 ltr.	12
KZ1470-2	2.00 ltr.	12
KZ1470-3	3.00 ltr.	12
KZ1470-5	5.00 ltr.	6



Litermål i PP levnedsmiddel godkendt

Litermål med ml. deling og hank.

Kan anvendes til Olie, Vand, Frostvæske, Sprinkler-væske, PH neutrale væsker, Diesel og Petroleum.

Er godkendt til fødevarer.

Alle modeller er stabelbare.

Art.nr.	Indhold	Emb.
KZ1480-01	0,10 ltr.	12
KZ1480-025	0,25 ltr.	12
KZ1480-05	0,50 ltr.	12
KZ1480-1	1,00 ltr.	12
KZ1480-2	2,00 ltr.	12
KZ1480-3	3,00 ltr.	12
KZ1480-5	5,00 ltr.	6

NB: KZ1480-5 er med lukket håndtag.

Graduated measuring jugs in PP

Measure in ml. on both sides and with handle.

Can be used for oil, water, antifreeze, Washer fluid, PH neutral liquids, Diesel and Kerosene.

Approved for contact with food.

All sizes are stackable.

Art.#	Capacity	Quantity
KZ1480-01	0.10 ltr.	12
KZ1480-025	0.25 ltr.	12
KZ1480-05	0.50 ltr.	12
KZ1480-1	1.00 ltr.	12
KZ1480-2	2.00 ltr.	12
KZ1480-3	3.00 ltr.	12
KZ1480-5	5.00 ltr.	6

Note: KZ1480-5 comes with closed handle.



KABI Oliemål - 1 liter

I transparent plast med låg og flextud med hætte. Bestandig over for olie, diesel, bremsevæsker, batterisyre, petroleum m.m.

Art.nr.	Indhold	Emb.
47125	1 liter	40

KABI Oil measure - 1 liter

In transparent design with lid and flexible spout with cap. Resistant to oil, diesel, break fluids, battery acid, petroleum etc.

Art.#	Capacity	Quantity
47125	1 liter	40



Inkl. Flextud
Incl. Flex spout

KABI Oliemål - 2 liter

I transparent plast med låg og flextud med hætte. Bestandig over for olie, diesel, bremsevæsker, batterisyre, petroleum m.m.

Art.nr.	Indhold	Emb.
47128	2 liter	25

KABI Oil measure - 2 liters

In transparent design with lid and flexible spout with cap. Resistant to oil, diesel, break fluids, battery acid, petroleum etc.

Art.#	Capacity	Quantity
47128	2 liters	25



Inkl. Flextud
Incl. Flex spout

KABI Oliemål - 5 liter

I transparent plast med låg og flextud med hætte. Bestandig over for olie, diesel, bremsevæsker, batterisyre, petroleum m.m.

Art.nr.	Indhold	Emb.
47132	5 liter	15

KABI Oil measure - 5 liters

In transparent design with lid and flexible spout with cap. Resistant to oil, diesel, break fluids, battery acid, petroleum etc.

Art.#	Capacity	Quantity
47132	5 liters	15



Inkl. Flextud
Incl. Flex spout

Flextud med hætte for KABI oliemål

Tilbehør til KABI oliemål 47125, 47128 & 47132.

Art.nr.	Emb.
47110 (Til 47125 & 47128)	1
47111 (Til 47132)	1

Flex spout with cap for KABI oil measure

Spare spout for oil measure 47125, 47128 & 47132.

Art.#	Quantity
47110 (For 47125 & 47128)	1
47111 (For 47132)	1

**KABI oliemål uden flextud**

I hvid eller rød plast med overløbskant, målinde-ling, tragtformet afløb med gevind for flextud.

Art.nr.	Indhold	Emb.
KZ1185H-1	1 liter Hvid model	220
KZ1185H-2	2 liter Hvid model	110
KZ1185H-3	3 liter Hvid model	90
KZ1185H-5	5 liter Hvid model	55
KZ1185-1	1 liter Rød model	220
KZ1185-2	2 liter Rød model	110
KZ1185-3	3 liter Rød model	90
KZ1185-5	5 liter Rød model	55

KABI Oil measure without flex spout

White or red with overflow rim, measurement graduation and outlet with thread for flex spout.

Art.#	Capacity	Quantity
KZ1185H-1	1 liter White model	220
KZ1185H-2	2 liters White model	110
KZ1185H-3	3 liters White model	90
KZ1185H-5	5 liters White model	55
KZ1185-1	1 liter Red model	220
KZ1185-2	2 liters Red model	110
KZ1185-3	3 liters Red model	90
KZ1185-5	5 liters Red model	55



Excl. Flextud
Excl. Flex spout

Excl. Flextud
Excl. Flex spout

KABI oliemål med flextud

I hvid eller rød plast med overløbskant, målinde-ling, tragtformet afløb med gevind for flextud.

Art.nr.	Indhold	Emb.
KZ1187H-1	1 liter Hvid model	220
KZ1187H-2	2 liter Hvid model	120
KZ1187H-3	3 liter Hvid model	90
KZ1187H-5	5 liter Hvid model	55
KZ1187-1	1 liter Rød model	220
KZ1187-2	2 liter Rød model	120
KZ1187-3	3 liter Rød model	90
KZ1187-5	5 liter Rød model	55

KABI Oil measure with flex spout

White or red with overflow rim, measurement graduation and outlet with thread for flex spout.

Art.#	Capacity	Quantity
KZ1187H-1	1 liter White model	220
KZ1187H-2	2 liters White model	120
KZ1187H-3	3 liters White model	90
KZ1187H-5	5 liters White model	55
KZ1187-1	1 liter Red model	220
KZ1187-2	2 liters Red model	120
KZ1187-3	3 liters Red model	90
KZ1187-5	5 liters Red model	55

**Flextud for KZ1185 oliemål**

Tilbehør til KABI oliemål KZ1185.

Til alle modeller. L. 225mm. Diam.udl. ø18mm.

Art.nr.	Emb.
KZ1185	1

Flex spout for KZ1185 oil measure

Accessory for KABI Oil measure KZ1185.

For all models L. 225mm. Outlet dia. ø18mm.

Art.#	Quantity
KZ1185	1



KABI aftapningshane

41161 er inkl. adaptor med 2"R gevind.

Art.nr.	Gevind	Emb.
41160	3/4"R	1
41161	3/4"R	1

KABI drum faucet

41161 is incl. adapter with 2"BSP thread.

Art.#	Thread	Quantity
41160	3/4"BSP	1
41161	3/4"BSP	1


KABI aftapningshane

Polyethylen.

Art.nr.	Gevind	Emb.
41165	3/4"R	1

KABI drum faucet

Polyethylene.

Art.#	Thread	Quantity
41165	3/4"BSP	1


KABI aftapningshane

Polyethylen, gummipakning EPT.

Art.nr.	Gevind	Emb.
41167	2"R	1

KABI drum faucet

Polyethylene, rubber sealing ring EPT.

Art.#	Thread	Quantity
41167	2"BSP	1


KABI selvluukkende oliebane

Art.nr.	Gevind	Emb.
41166	3/4"R	1

KABI drum faucet self-closing

Art.#	Thread	Quantity
41166	3/4"BSP	1


KABI selvluukkende oliebane

Aluminium.

Art.nr.	Gevind	Emb.
41169	2"R	1

KABI drum faucet self-closing

Aluminum.

Art.#	Thread	Quantity
41169	2"BSP	1


Kuglehane af messing

Egnet til aggressive væsker, pakninger er af teflon. Med 90° udløb.

Art.nr.	Gevind	Emb.
40640	3/4"R	1

Ball valve brass

Suitable for aggressive fluids. With sealing ring in teflon. 90° outlet.

Art.#	Thread	Quantity
40640	3/4"BSP	1


Kuglehane af messing

Egnet til aggressive væsker, pakninger er af teflon. Med 90° udløb.

Art.nr.	Gevind	Emb.
40642	2"R	1

Ball valve brass

Suitable for aggressive fluids. With sealing ring in teflon. 90° outlet.

Art.#	Thread	Quantity
40642	2"BSP	1


Låg til dunk med 3/4"R (indv.) tilslutning

Passer til standard dunke. Låget har et 3/4"R (indv.) gevind i midten, så man kan tilslutte en hane.

Art.nr.	Gevind	Emb.
96132	DIN 51 Indv. – 3/4"R Indv.	1
96131	DIN 61 Indv. – 3/4"R Indv.	1
96133	DIN 71 Indv. – 3/4"R Indv.	1

Lid for drum with 3/4"BSP (F) connection

Fits standard plastic containers. This lid has a 3/4"BSP (F) thread, for connecting a faucet.

Art.#	Thread	Quantity
96132	DIN 51 (F) – 3/4"R (F)	1
96131	DIN 61 (F) – 3/4"R (F)	1
96133	DIN 71 (F) – 3/4"R (F)	1


Aftapningshaner


For montage på dunke.

Art.nr.	Gevind	Emb.
41151	40mm DK	1
41153	DIN 51 (25L Dansk)	1
41154	DIN 61	1
41155	DIN 71 med flyder	1

Drum faucet

For mounting to bottles.

Art.#	Thread	Quantity
41151	40mm DK	1
41153	DIN 51	1
41154	DIN 61	1
41155	DIN 71 with float ball	1

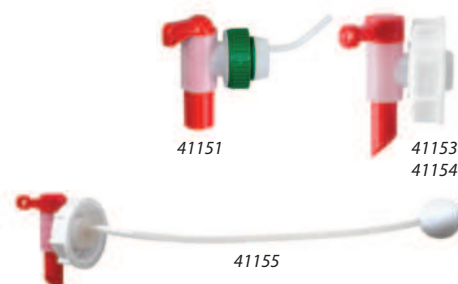

**Tryksmørekaner
Penselkaner
Oliefasker**

**Pressure oilers
Gluemasters
Oilers**



**Tryksmørekaner med plastbeholder, PE
Pressure oilers with plastic container, PE**

35

**Tryksmørekaner med stålbeholder
Pressure oilers with steel container**

36

**Penselkaner
Gluemasters**

37

**Plastflasker og oliefasker
Plastic bottles and oilers**

38

KABI patenteret tryksmørekande med messingpumpe. Tryksmørekanden fås i flere forskellige størrelser og i lige så mange udførelser. KABI udfører også tryksmørekander efter kundespecifikke ønsker, og kan således leveres som et OEM produkt.

KABI patented pressure oiler with calibrated brass pump. The pressure oiler is available in various sizes and many styles. KABI also makes custom pressure oilers supplying them as OEM products.

Art.nr. / Art.#	Model / Model	Indhold / Capacity	Beholder / Container	Tud / Spout	Emb. / Quantity
-----------------	---------------	--------------------	----------------------	-------------	-----------------

KA1320	Mini	0,20 ltr.	PE	Stål / Steel	12
--------	------	-----------	----	--------------	----



Art.nr. / Art.#	Model / Model	Indhold / Capacity	Beholder / Container	Tud / Spout	Emb. / Quantity
-----------------	---------------	--------------------	----------------------	-------------	-----------------

KA1028	Hobby	0,30 ltr.	PE	PP	8
KA1032	Hobby	0,30 ltr.	PE	PP/PE-Flex	8



Art.nr. / Art.#	Model / Model	Indhold / Capacity	Beholder / Container	Tud / Spout	Emb. / Quantity
-----------------	---------------	--------------------	----------------------	-------------	-----------------

KA1035	Populær / Popular	0,40 ltr.	PE	PP	12
KA1050	Heavy Duty	0,50 ltr.	PE	PP	12



Art.nr. / Art.#	Model / Model	Indhold / Capacity	Beholder / Container	Tud / Spout	Emb. / Quantity
-----------------	---------------	--------------------	----------------------	-------------	-----------------

KA1040	Populær / Popular	0,40 ltr.	PE	PP/PE-Flex	12
KA1060	Heavy Duty	0,50 ltr.	PE	PP/PE-Flex	12



Art.nr. / Art.#	Model / Model	Indhold / Capacity	Beholder / Container	Tud / Spout	Emb. / Quantity
-----------------	---------------	--------------------	----------------------	-------------	-----------------

KA1335	Populær / Popular	0,40 ltr.	PE	Stål / Steel	12
KA1350	Heavy Duty	0,50 ltr.	PE	Stål / Steel	9



Art.nr. / Art.#	Model / Model	Indhold / Capacity	Beholder / Container	Tud / Spout	Emb. / Quantity
-----------------	---------------	--------------------	----------------------	-------------	-----------------

KA1080	Big	0,75 ltr.	PE	PP/PE-Flex	10
--------	-----	-----------	----	------------	----



Tilbehør / Accessories

Art.nr. / Art.#	Anvendes til / Used for	Tud / Spout	Længde / Length	Emb. / Quantity
-----------------	-------------------------	-------------	-----------------	-----------------

KA6N	KA1028, KA1035, KA1050, KA35, KA50	PP	150mm	1
KA8N	KA1040, KA1060, KA1032, KA1080, KA42	PP/PE-Flex	200mm	1
KA11S	KA40, KA60, KA110	Stål / Steel	280mm	1
KA3	Smørespids for KA11S / Nozzle for KA11S	Mess. / Brass		1



KABI patenteret tryksmørekande med messingpumpe. Tryksmørekanden fås i flere forskellige størrelser og i lige så mange udførelser. KABI udfører også tryksmørekander efter kundespecifikke ønsker, og kan således leveres som et OEM produkt.

KABI patented pressure oiler with calibrated brass pump. The pressure oiler is available in various sizes and many styles. KABI also makes custom pressure oilers supplying them as OEM products.

Art.nr. / Art.#	Model / Model	Indhold / Capacity	Beholder / Container	Tud / Spout	Emb. / Quantity
KA315	Mini	0,15 ltr.	Stål / Steel	Stål / Steel	15



Art.nr. / Art.#	Model / Model	Indhold / Capacity	Beholder / Container	Tud / Spout	Emb. / Quantity
KA325	Mini	0,25 ltr.	Stål / Steel	Stål / Steel	12



Art.nr. / Art.#	Model / Model	Indhold / Capacity	Beholder / Container	Tud / Spout	Emb. / Quantity
KA35	Populær / Popular	0,40 ltr.	Stål / Steel	PP	12
KA50	Heavy Duty	0,50 ltr.	Stål / Steel	PP	9



Art.nr. / Art.#	Model / Model	Indhold / Capacity	Beholder / Container	Tud / Spout	Emb. / Quantity
KA40	Populær / Popular	0,40 ltr.	Stål / Steel	Stål / Steel, Flex	12
KA60	Heavy Duty	0,50 ltr.	Stål / Steel	Stål / Steel, Flex	9



Art.nr. / Art.#	Model / Model	Indhold / Capacity	Beholder / Container	Tud / Spout	Emb. / Quantity
KA335	Populær / Popular	0,40 ltr.	Stål / Steel	Stål / Steel	12



Art.nr. / Art.#	Model / Model	Indhold / Capacity	Beholder / Container	Tud / Spout	Emb. / Quantity
KA42	Populær / Popular	0,40 ltr.	Stål / Steel	PP/PE-Flex	12



Art.nr. / Art.#	Model / Model	Indhold / Capacity	Beholder / Container	Tud / Spout	Emb. / Quantity
KA110	Big	1,00 ltr.	Stål / Steel	Stål / Steel, Flex	10



KABI patenteret penselkande med messingpumpe. Penselkanden kan anvendes til så forskellige applikationer som neopren-lim, olieprodukter, etc. Penselkanden har specielt fundet anvendelse indenfor isolerings- og læderbranchen, deraf produktnavnet GLUEMASTER.

KABI udfører også penselkander efter kundespecifikke ønsker, og kan således levere den som et OEM produkt.

KABI Patented brush can with calibrated brass pump. The brush is suitable for use with such varied products as neoprene glue, oil products etc. The pump is widely used for gluing of insulation material, leather products and upholstery – hence the product name of GLUEMASTER.

KABI also makes custom brush cans as OEM products.

Penselkande med lige tud / Gluemaster with straight spout

Art.nr. / Art.#	Model / Model	Indh. / Cap.	Beh. / Container	Pensel / Brush	Emb. / Quantity
KA25B11	Gluemaster	0,25 ltr.	Stål / Steel	Med hætte ø11 / With cap ø11	12
KA25B17	Gluemaster	0,25 ltr.	Stål / Steel	Med hætte ø17 / With cap ø17	12
KA25B25	Gluemaster	0,25 ltr.	Stål / Steel	Uden hætte ø25 / Without cap ø25	12



Penselkande med bukket tud / Gluemaster with bend spout

Art.nr. / Art.#	Model / Model	Indh. / Cap.	Beh. / Container	Pensel / Brush	Emb. / Quantity
KA25BB11	Gluemaster	0,25 ltr.	Stål / Steel	Med hætte ø11 / With cap ø11	12
KA25BB17	Gluemaster	0,25 ltr.	Stål / Steel	Med hætte ø17 / With cap ø17	12
KA25BB25	Gluemaster	0,25 ltr.	Stål / Steel	Uden hætte ø25 / Without cap ø25	12



Tilbehør / Accessories

Art.nr. / Art.#	Type / Type
KA15/11	Pensel ø11mm kort model m. hætte M8 x 1,0 / Brush ø11mm short model with cap M8 x 1,0
KA11MM	Pensel ø11mm m/hætte M8 x 1,0 / Brush ø11mm with cap M8 x 1,0
KA17MM	Pensel ø17mm m/hætte M8 x 1,0 / Brush ø17mm with cap M8 x 1,0
KA25MM	Pensel ø25mm u/hætte M8 x 1,0 / Brush ø25mm without cap M8 x 1,0



KA15/11



KA11MM



KA17MM m. hætte / with cap



KA17MM



KA25MM

KABI plastflasker

Produceret af Polyethylen (PE), samme plasttype som til fødevarer.

Art.nr.	Indhold	Emb.
KA60117	0,2 ltr.	20/200
KA60121	0,3 ltr.	15/150
KA60127	0,7 ltr.	25/75
KA60136	1,0 ltr.	15/45

KABI Plasticbottles

Produced from polyethylene (PE), same type of plastic that is used in the food industry.

Art.#	Capacity	Quantity
KA60117	0.2 ltr.	20/200
KA60121	0.3 ltr.	15/150
KA60127	0.7 ltr.	25/75
KA60136	1.0 ltr.	15/45

**KABI olieflasker med messingspids**

Produceret af Polyethylen (PE).

Art.nr.	Indhold	Emb.
KA60115	0,2 ltr.	20/200
KA60118	0,3 ltr.	15/150
KA60123	0,7 ltr.	25/75
KA60132	1,0 ltr.	15/45

KABI Oilers with brass tip

Produced from polyethylene (PE).

Art.#	Capacity	Quantity
KA60115	0.2 ltr.	20/200
KA60118	0.3 ltr.	15/150
KA60123	0.7 ltr.	25/75
KA60132	1.0 ltr.	15/45

**Tud for plastflasker**

Art.nr.	Størrelse	Emb.
KA60131	0,2 – 0,3 – 0,7 & 1,0 ltr.	1

Spout for plasticbottles

Art.#	Size	Quantity
KA60131	0.2 – 0.3 – 0.7 & 1.0 ltr.	1

Tud for olieflasker med messingspids

Art.nr.	Størrelse	Emb.
KA60122	0,2 – 0,3 – 0,7 & 1,0 ltr.	1

Spout for Oilers with brass tip

Art.#	Size	Quantity
KA60122	0.2 – 0.3 – 0.7 & 1.0 ltr.	1

**KABI plastkande**

Plastkanden er af Polyethylen (PE).
Med bukket rør.

Art.nr.	Indhold	Emb.
KA125	0,25 ltr.	12
KA150	0,50 ltr.	12

KABI plastic jug

Plastic jug is made of polyethylene (PE).
With bent pipe.

Art.#	Capacity	Quantity
KA125	0.25 ltr.	12
KA150	0.50 ltr.	12



Fedtpressere
Fedtsmøreapparater
Fedtpumper
Fedtsmørekopper
Smørenipler

Grease guns
Grease pump kits
Grease pumps
Lubricators
Hydraulic grease nipples



Fedtpressere – Batteridrevne fedtpressere – Trykluftdrevne fedtpressere **40**
Grease guns – Cordless grease guns – Air operated grease guns

Tilbehør for fedtpressere **47**
Accessories for grease guns

Trykluftdrevne fedtsmøreapparater – Fedtpumper – Tilbehør **52**
Air-operated grease pump kits – Grease pumps – Accessories

Automatiske fedtsmørekopper og "Stauffer" **64**
Automatic lubricators and "Stauffer"

Smørenipler i galvaniseret stål – Rustfrit stål – Syrefast stål – Messing **65**
Hydraulic grease nipples in zinc plated steel – Stainless – Acid proof – Brass

Nedenstående fedtpressere er alle forsynet med fyldenippel, hvilket betyder at de kan anvendes til såvel patroner, opslugning fra fedtspande og fyldning fra fedtfylde.

The Grease guns are all equipped with a fillernipple, making them suitable for cartridge, bulk grease or filling by Grease filler pumps.

KABI Vægtstangsfedtpresser 400

Excl. tilbehør.

Max. tryk: 400 bar.
Ydelse: 0,9 gr. pr. slag.
Tilslutningsgevind: 1/8"R.
Indhold: 400/500 gram.
Leveres i kartonæske.

Art.nr.	Emb.
KF400X	16

KABI Lever Grease Gun 400

Excl. accessories.

Max. pressure: 400 bar.
Flow: 0.9 gr. per stroke.
Thread: 1/8"BSP.
Capacity: 400/500 gram.
Supplied in a cardboard box.

Art.#	Quantity
KF400X	16



KABI Vægtstangsfedtpresser 400

Leveres med vinklet smørerør samt 4-bakket smørehoved.

Max. tryk: 400 bar.
Ydelse: 0,9 gr. pr. slag.
Tilslutningsgevind: 1/8"R.
Indhold: 400/500 gram.
Leveres i kartonæske.

Art.nr.	Emb.
KF400C	16

KABI Lever Grease Gun 400

Supplied with angled rigid tube and 4-jaw hexagon coupler.

Max. pressure: 400 bar.
Flow: 0.9 gr. per stroke.
Thread: 1/8"BSP.
Capacity: 400/500 gram.
Supplied in a cardboard box.

Art.#	Quantity
KF400C	16



KABI Vægtstangsfedtpresser 400

Leveres med slange samt 4-bakket smørehoved.

Max. tryk: 400 bar.
Ydelse: 0,9 gr. pr. slag.
Tilslutningsgevind: 1/8"R.
Indhold: 400/500 gram.
Leveres i kartonæske.

Art.nr.	Slange	Emb.
KF400H	300mm	16
KF400HL	500mm	16

KABI Lever Grease Gun 400

Supplied with hose and 4-jaw hexagon coupler.

Max. pressure: 400 bar.
Flow: 0.9 gr. per stroke.
Thread: 1/8"BSP.
Capacity: 400/500 gram.
Supplied in a cardboard box.

Art.#	Hose	Quantity
KF400H	300mm	16
KF400HL	500mm	16



KABI Heavy Duty vægtstangsfedtpresser 600

Vægtstangsfedtpressen er forsynet med trykstang og vendbar stempellæbe, til brug ved løst fedt. Lev. med vinklet smørerør og 4-bakket smørehoved.

Max. tryk: 690 bar.
Ydelse: 1,0 gr. pr. slag.
Tilslutningsgevind: 1/8"R.
Indhold: 400/500 gram.
Leveres i kartonæske.

Art.nr.	Emb.
KF600C	10

KABI Heavy Duty Lever Grease Gun 600

The grease gun is equipped with a reversible piston lip, to be used with bulk grease. Supplied with angled rigid tube and 4-jaw hexagon coupler.

Max. pressure: 690 bar.
Flow: 1.0 gr. per stroke.
Thread: 1/8"BSP.
Capacity: 400/500 gram.
Supplied in a cardboard box.

Art.#	Quantity
KF600C	10



KABI Heavy Duty vægtstangsfedtpresser 600

Vægtstangsfedtpressen er forsynet med trykstang og vendbar stempellæbe, til brug ved løst fedt. Leveres med 300mm slange samt 4-bakket smørehoved.

Max. tryk: 690 bar.
Ydelse: 1,0 gr. pr. slag.
Tilslutningsgevind: 1/8"R.
Indhold: 400/500 gram.
Leveres i kartonæske.

Art.nr.	Emb.
KF600H	10

KABI Heavy Duty Lever Grease Gun 600

The grease gun is equipped with a reversible piston lip, to be used with bulk grease. Supplied with 300mm hose and 4-jaw hexagon coupler.

Max. pressure: 690 bar.
Flow: 1.0 gr. per stroke.
Thread: 1/8"BSP.
Capacity: 400/500 gram.
Supplied in a cardboard box.

Art.#	Quantity
KF600H	10



KABI Enhånds-fedtpresser 450

For standard fedtpatroner.

Max. tryk: 345 Bar.

Ydelse: ca. 0,5 gr. pr. slag.

Tilslutningsgevind: 1/8"R.

Indhold: 400/500 gram.

Leveres i kartonæske.

Art.nr.		Emb.
KF450X	Uden tilbehør	16
KF450C	Inkl. lige smørerør & 4-bakket smørehoved	16

KABI One hand Grease Gun 450

For use with cartridge.

Max. pressure: 345 bar.

Flow: approx. 0.5 g. per stroke.

Thread: 1/8"BSP.

Capacity: 400/500 gram.

Supplied in a cardboard box.

Art.#		Quantity
KF450X	Excl. accessories	16
KF450C	Incl. straight lubricating tube & 4-jaw hexagon coupler	16


KABI Enhånds-fedtpresser 450

For standard fedtpatroner.

Max. tryk: 345 Bar.

Ydelse: ca. 0,5 gr. pr. slag.

Med slange, samt 4-bakket smørehoved.

Tilslutningsgevind: 1/8"R.

Indhold: 400/500 gram.

Leveres i kartonæske.

Art.nr.	Slange	Emb.
KF450H	300mm	16
KF450HL	500mm	16
KF450HLF	500mm + fyldenippel	16

KABI One hand Grease Gun 450

For use with cartridge.

Max. pressure: 345 bar.

Flow: approx. 0.5 g. per stroke.

With Hose and 4-jaw hexagon coupler.

Thread: 1/8"BSP.

Capacity: 400/500 gram.

Supplied in a cardboard box.

Art.#	Hose	Quantity
KF450H	300mm	16
KF450HL	500mm	16
KF450HLF	500mm + filler nipple	16


KABI Heavy Duty enhånds-fedtpresser 650

Fedtpresseren er med ergonomisk greb for optimalt udnyttelse af kraften. Kan anvendes til såvel patroner som løst fedt.

Monteret med fyldenippel/udluftningsventil.

Max. tryk: 517 Bar.

Ydelse: ca. 0,68 gr. pr. slag.

Med lige smørerør samt 4-bakket smørehoved.

Tilslutningsgevind: 1/8"R.

Indhold: 400/500 gram.

Leveres i kartonæske.

Art.nr.	Emb.
KF650C	10

KABI Heavy Duty One hand Grease Gun 650

The grease gun has a ergonomic grip for an optimal usage of the power. It is suitable for loading by cartridge as well as from grease-loading equipment.

Filler nipple/Air Release Valve.

Max. pressure: 517 bar.

Flow: approx. 0.68 gr. per stroke.

Straight lubricating hose & 4 jaw hexagon coupler.

Thread: 1/8"BSP.

Capacity: 400/500 gram.

Supplied in a cardboard box.

Art.#	Quantity
KF650C	10


KABI Heavy Duty enhånds-fedtpresser 650

Fedtpresseren er med ergonomisk greb for optimalt udnyttelse af kraften. Kan anvendes til såvel patroner som løst fedt.

Monteret med fyldenippel/udluftningsventil.

Max. tryk: 517 Bar.

Ydelse: ca. 0,68 gr. pr. slag.

Med 300mm slange samt 4-bakket smørehoved.

Tilslutningsgevind: 1/8"R.

Indhold: 400/500 gram.

Leveres i kartonæske.

Art.nr.	Emb.
KF650H	10

KABI Heavy Duty One hand Grease Gun 650

The grease gun has a ergonomic grip for an optimal usage of the power. It is suitable for loading by cartridge as well as from grease-loading equipment.

Filler nipple/Air Release Valve.

Max. pressure: 517 bar.

Flow: approx. 0.68 gr. per stroke.

300mm hose & 4 jaw hexagon coupler.

Thread: 1/8"BSP.

Capacity: 400/500 gram.

Supplied in a cardboard box.

Art.#	Quantity
KF650H	10


KABI enhånds-fedtpistol 150

Enhånds-fedtpresser med lige smørerør og 4-bakket smørehoved. Fedtpistolen har 2 afgang, hvilket betyder at den både kan anvendes vinklet og lige ud.

Max. tryk: 240 Bar.

Ydelse: ca. 0,4 g. pr. slag.

Tilslutningsgevind: 1/8"R.

Indhold: 120 gram.

Leveres i plastpose.

Art.nr.	Emb.
KF150	1

KABI One hand Grease Gun 150

Straight lubricating tube and a 4-jaw hexagon coupler. The grease gun has 2 discharge ports - commonly used front port for regulator greasing, and top port used primarily with flexible hose for greasing in inaccessible areas.

Max. pressure: 240 bar.

Flow: approx. 0.4 g. per stroke.

Thread: 1/8"BSP.

Capacity: 120 gram.

Art.#	Quantity
KF150	1



KABI Vægtstangsfedtpresse med transparent Cylinder

Heavy Duty Vægtstangsfedtpresse med transparent cylinder, der kan være med til at undgå fejlbrug af fedttype. Kan anvendes til patroner, fyldeapparater.

Max. tryk: 690 bar.

Gevind: 1/8"R.

Indhold: 400/500 gram.

Ydelse: ca. 1,0 gr. pr. pumpe slag.

Leveres i kartonæske.

Art.nr.	Tilbehør	Emb.
KF600CTX	Fedtpresse uden tilbehør	10
KF600CTH	Fedtpresse inkl. 300mm slange og mundstykke	10

KABI Lever Grease Gun with transparent tube

Quick lubricant identification eliminating the risk of mixing incompatible or unspecified lubricants. Suitable for cartridges, grease filler pumps.

Max. pressure: 690 bar.

Thread: 1/8" BSP.

Capacity: 400/500 gram.

Flow: approx. 1.0 gram per stroke.

Supplied in a cardboard box.

Art.#	Accessories	Quantity
KF600CTX	Grease gun excl. accessories	10
KF600CTH	Grease gun incl. 300mm hose and coupler	10



Vægtstangsfedtpresse med slange, mundstykke og udluftningsventil

For patroner og opslugning af løst fedt. Pakket i plasticpose.

Tilslutning: 1/8"R.

Max. tryk: 400 bar.

Art.nr.	Tilbehør	Emb.
981000	300mm slange & udluftningsventil	16

Lever Grease gun with hose, coupler and air release valve

For cartridges and bulk grease. Packed in a plastic bag.

Connection: 1/8" BSP.

Max. pressure: 400 bar.

Art.#	Accessories	Quantity
981000	300mm hose and air release valve	16



KABI Vægtstangsfedtpresse SIC

For SIC patroner (screw in cartridge). Leveres med 300mm slange samt 4-bakket smørehoved.

Max. tryk: 400 bar.

Tilslutning: 1/8"R.

Indhold: 400 gram SIC patroner.

Ydelse: ca. 0,9 gr. pr. pumpe slag.

Leveres i kartonæske.

Art.nr.	Tilbehør	Emb.
KF401H	300mm slange	1

KABI Lever grease gun SIC

For SIC cartridge (screw in cartridge). Supplied with 300mm hose and 4-jaw hexagon coupler.

Max. pressure: 400 bar (6.000 PSI).

Thread: 1/8" BSP.

Capacity: 400 gram SIC cartridges.

Flow: approx. 0.9 gram per stroke.

Supplied in a cardboard box.

Art.#	Accessories	Quantity
KF401H	300mm hose	1



KABI Enhåndsfedtpresser SIC

For SIC patroner (screw in cartridge). Leveres med 300mm slange samt 4-bakket smørehoved.

Max. tryk: 345 bar.

Tilslutning: 1/8"R.

Indhold: 400 gram SIC patroner.

Ydelse: ca. 0,5 gr. pr. pumpe slag.

Leveres i kartonæske.

Art.nr.	Tilbehør	Emb.
KF451H	300mm slange	1

KABI One hand grease gun SIC

For SIC cartridge (screw in cartridge). Supplied with 300mm hose and 4-jaw hexagon coupler.

Max. pressure: 345 bar (5.000 PSI).

Thread: 1/8" BSP.

Capacity: 400 gram SIC cartridges.

Flow: approx. 0.5 gram per stroke.

Supplied in a cardboard box.

Art.#	Accessories	Quantity
KF451H	300mm hose	1



KABI stødpresser 30ccm

Stødpresser til blødt fedt. Inkl. støvhætte.

Max. tryk: 69 bar. Ydelse: 0,9 gr. pr. stød.

Gevind: 1/8"R. Kapacitet: 30 ccm.

Art.nr.	Tilbehør	Emb.
30715	Hulmundstykke	1
30716	Spidsmundstykke	1

KABI Push Type

For soft grease. Incl. dust protection cap.

Max. pressure: 69 bar. Flow: 0.9 g/stroke.

Connector: 1/8" BSP. Capacity: 30 ccm.

Art.#	Accessories	Quantity
30715	With Concave nozzle	1
30716	With Pointed nozzle	1



Tilbehør for stødpresser 30ccm

Art.nr.	Tilbehør	Emb.
38416	Spidsmundstykke	1
38417	Hulmundstykke	1

Accessories for Push Type

Art.#	Accessories	Quantity
38416	Pointed nozzle	1
38417	Concave nozzle	1



Abnox Muralt Vægtstangsfedtspresse

En meget robust vægtstangsfedtspresse. Kan benyttes til både patroner og løst fedt. Fedt op til NLGI 2 / 5000 m Pa.s.

Arbejdstryk: 400 bar. Max. tryk: 600 bar.

Ydelse: 1,4 ccm pr. pumpe slag. Tilslutning: 1/8"R.

Excl. tilbehør. Incl. fyldenippel.

Art.nr.	Indhold	Emb.
37540	400/500 ccm	1

Abnox Muralt Lever Grease Gun

A very robust lever grease gun. For use with cartridge or bulk grease. Lubricants up to NLGI 2 / 5000 m Pa.s.

Operating pressure: 400 bar. Max. pressure: 600 bar.

Delivery rate: 1.4 ccm/stroke. Connection: 1/8" BSP.

Excl. accessories. Incl. filler cap.

Art.#	Capacity	Quantity
37540	400/500 ccm	1

**Abnox Muralt Vægtstangsfedtspresse**

En meget robust vægtstangsfedtspresse. Kan benyttes til løst fedt fra fedtfylder. Fedt op til NLGI 2 / 5000 m Pa.s.

Arbejdstryk: 400 bar. Max. tryk: 600 bar.

Ydelse: 1,4 ccm pr. pumpe slag. Tilslutning: 1/8"R.

Excl. tilbehør. Incl. fyldenippel.

Art.nr.	Indhold	Emb.
37546	1300 ccm	1

Abnox Muralt Lever Grease Gun

A very robust lever grease gun. For use with bulk grease or by filler pump. Lubricants up to NLGI 2 / 5000 m Pa.s.

Operating pressure: 400 bar. Max. pressure: 600 bar.

Delivery rate: 1.4 ccm/stroke. Connection: 1/8" BSP.

Excl. accessories. Incl. filler cap.

Art.#	Capacity	Quantity
37546	1300 ccm	1

**Abnox-Wanner smørepistol 316-2**

Markedets bedste enhåndsbetjente smørepistol for både patroner og løst fedt fra fedtfylder. Fedt op til NLGI 2 / 5000 m Pa.s. Cylindren er parallel med smørerøret, hvilket gør at ergonomien er helt i top.

Arbejdstryk: 400 bar. Max. tryk: 600 bar.

Indhold: 400/500 ccm. Ydelse: 0,5 ccm pr. tryk.

Tilslutning: 1/8"R.

Leveres med: smørerør med 4-bakket mundstykke, fyldenippel og udluftningsventil.

Art.nr.	Emb.
30651	1

Abnox-Wanner One hand grease gun 316-2

The best single-handed grease gun on the market.

For use with cartridge, bulk grease or by grease filler pump. Lubricants up to NLGI 2 / 5000 m Pa.s. Ergonomic design, very comfortable in the hand.

Operating pressure: 400 bar. Max. pressure: 600 bar.

Capacity: 400/500 ccm. Delivery rate: 0.5 ccm/stroke.

Connection: 1/8" BSP.

Supplied with: rigid angled tube and 4-piece hydraulic connector, filler cap and air bleed valve.

Art.#	Quantity
30651	1

**Abnox-Wanner smørepistol 315**

Enhåndsbetjent smørepistol til brug med løst fedt fra fedtfylder. Fedt op til NLGI 2 / 5000 m Pa.s.

Arbejdstryk: 400 bar. Max. tryk: 600 bar.

Indhold: 120 ccm. Ydelse: 0,5 ccm pr. tryk.

Tilslutning: 1/8"R.

Leveres med: smørerør med 4-bakket mundstykke, fyldenippel og udluftningsventil.

Art.nr.	Emb.
30953	1

Abnox-Wanner Grease gun 315

Single-handed grease gun. For bulk grease or by filler pump. Lubricants up to NLGI 2 / 5000 m Pa.s.

Operating pressure: 400 bar. Max. pressure: 600 bar.

Capacity: 400/500 ccm. Delivery rate: 0.5 ccm/stroke.

Connection: 1/8" BSP.

Supplied with: rigid angled tube and 4-piece hydraulic connector, filler cap and air bleed valve.

Art.#	Quantity
30953	1

**Højtryksfedtspresse Abnox med manometer**

Enhåndsbetjent højtryksfedtspresse som er standardudstyr på alle træbearbejdningsvirksomheder der anvender hydro-hoveder. Direkte aflæsning af det aktuelle tryk på manometret.

Kun til brug med standard fedtpatroner DIN 1284. Fedt op til NLGI 3 / 5000 m Pa.s.

Arbejdstryk: 450 bar. Max. tryk: 600 bar.

Ydelse: 0,3 ccm pr. tryk. Tilslutning: 1/8"R.

Leveres med: 325 mm højtrykssmøreslange og mundstykke. Pakket i en kartonæske.

Art.nr.		Emb.
1032391	Højtryksfedtspresse	1
K83576	Tilbehør - ekstra manchetter	1

Abnox One hand Grease gun with Gauge

One hand operated grease gun, used for clamping tools and face milling gutters. Supplied with a 325mm high pressure hose, 4-piece coupler and air release valve.

Only for standard cartridges DIN 1284.

Grease up to NLGI 3 / 5000 m Pa.s.

Operating pressure: 450 bar. Max. pressure: 600 bar.

Flow: 0.3 ccm/stroke. Connection: 1/8" BSP.

Supplied with: 325 mm high pressure lubricating hose and coupler. Supplied in a cardboard box.

Art.#		Quantity
1032391	Grease gun	1
K83576	Accessory - extra manifold	1



K83576

Wanner stødpresere

Teleskopmodel med hulmundstykke nr. 433.

Max. tryk: 150 bar. Ydelse: 0,6 gr. pr. stød.

Tilslutning: 1/8"R.

Art.nr.	Model	Indhold	Mål	Emb.
31950	300-2	120 ccm	Ø40 x 110mm	1

Wanner Push Type

Telescop model with concave nozzle.

Max. pressure: 150 bar. Flow: 0.6 g/stroke.

Connector: 1/8" BSP.

Art.#	Model	Capacity	Measures	Quantity
31950	300-2	120 ccm	Ø40 x 110mm	1



Nedenstående fedtpressere er alle forsynet med fyldenippel, hvilket betyder at de kan anvendes til såvel patroner, opslugning fra fedtspande og fyldning fra fedtfyldere.

The Grease guns are all equipped with a fillernipple, making them suitable for cartridge, bulk grease or filling from Grease filler pumps.

KABI Trykluftdrevet fedtpresse

Tilslutningsgevind: 1/8"R.

Indhold: 400/500 gram.

Trykforhold: 50:1 (max. arbejdsdruk: 8 bar).

Ydelse: ca. 1 gr. pr. tryk på aftrækkeren.

Min/max. Tryk: 3 bar/8 bar.

Leveres med vinklet smørerør samt 4-bakket smørehoved. Leveres i kartonæske.

Art.nr.	Emb.
KF486C	12

KABI Air-operated Grease Gun

Thread: 1/8"BSP.

Capacity: 400/500 gram.

Pressure ratio: 50:1 (max. 8 bar).

Flow: approx. 1 gr. per stroke.

Min/max. pressure: 3 bar/8 bar.

Angled rigid tube and 4-jaw hexagon coupler. Supplied in a cardboard box.

Art.#	Quantity
KF486C	12



KABI Trykluftdrevet fedtpresse

Tilslutningsgevind: 1/8"R.

Indhold: 400/500 gram.

Trykforhold: 50:1 (max. arbejdsdruk: 8 bar).

Ydelse: ca. 1 gr. pr. tryk på aftrækkeren.

Min/max. Tryk: 3 bar/8 bar.

Leveres med 300mm slange samt 4-bakket smørehoved. Leveres i kartonæske.

Art.nr.	Emb.
KF486H	12

KABI Air-operated Grease Gun

Thread: 1/8"BSP.

Capacity: 400/500 gram.


Pressure ratio: 50:1 (max. 8 bar).

Flow: approx. 1 gr. per stroke.

Min/max. pressure: 3 bar/8 bar.

300mm hose and 4-jaw hexagon coupler. Supplied in a cardboard box.

Art.#	Quantity
KF486H	12

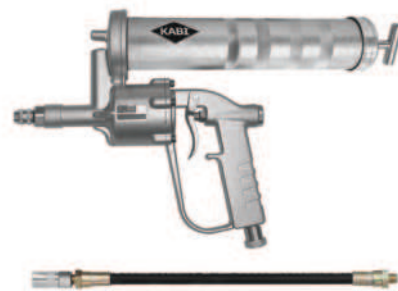

KABI Trykluftdrevet fedtpresse

Kontinuerligt fedtflow når aftrækkeren holdes inde.

Tilslutningsgevind: 1/8"R.

Indhold: 400/500 gram.

Trykforhold: 40:1 (max. arbejdsdruk: 8 bar).

Leveres med vinklet smørerør samt 4-bakket smørehoved. Leveres i kartonæske.

Art.nr.	Emb.
KF476C	12

KABI Air-operated Grease Gun

Continuous discharge with the trigger activated.

Thread: 1/8"BSP.

Capacity: 400/500 gram.

Pressure ratio: 40:1 (max. 8 bar).

Angled rigid tube and 4-jaw hexagon coupler. Supplied in a cardboard box.

Art.#	Quantity
KF476C	12



KABI Trykluftdrevet fedtpresse

Kontinuerligt fedtflow når aftrækkeren holdes inde.

Tilslutningsgevind: 1/8"R.

Indhold: 400/500 gram.

Trykforhold: 40:1 (max. arbejdsdruk: 8 bar).

Leveres med 300mm slange samt 4-bakket smørehoved. Leveres i kartonæske.

Art.nr.	Emb.
KF476H	12

KABI Air-operated Grease Gun

Continuous discharge with the trigger activated.

Thread: 1/8"BSP.

Capacity: 400/500 gram.

Pressure ratio: 40:1 (max. 8 bar).

300mm hose and 4-jaw hexagon coupler. Supplied in a cardboard box.

Art.#	Quantity
KF476H	12



KABI Montagebeslag

Montagebeslaget kan anvendes til alle typer fedtpressere med standard cylinder. Kan fastmonteres i servicebil, traktor, mejetærsker, over filebænk osv.

Art.nr.	Emb.
KF57	1

KABI Grease Gun holder

The grease gun holder is suitable for all types of grease guns with standard cylinders. Can be fixed in service car, tractor, combined harvester, above a workbench, etc.

Art.#	Quantity
KF57	1



KABI Accu Fedtpresse 19,2V Lithium-ion

19,2V Accu fedtpresse med lithium-ion batteri. Leveres med 750mm smøreslange, 4-bakket mundstykke og 1-times oplader i en praktisk kuffert. Kan bruges med løst fedt, 400 gram fedtpatroner og med 400 gram SIC patroner (screw in cartridge). Brug det medfølgende afkortede rør som beskyttende lag udenom SIC patronen.

Tilslutning: 1/8"NPT.

Ydelse: 75g/min.

Max. tryk: 600 bar.

Batteri: Lithium-ion 1500mAh.

Art.nr.	Leveres med	Emb.
KF720-C1	1 batteri	1
KF720-D1	2 batterier	1

KABI Cordless Grease gun 19.2V Lithium-ion

19.2V Cordless grease gun with lithium-ion battery. Comes complete with 750mm hose, 4-jaw coupler, 1 hour charger and delivered in a handy suitcase. For use with bulk grease, 400 gram cartridges and with 400 gram SIC cartridges (screw in cartridge). Use the supplied shortened tube as a protective layer around the SIC cartridge.

Connection: 1/8"NPT.

Flow: 75g/min.

Pressure: 600 bar.

Battery: Lithium-ion 1500mAh.

Art.#	Delivered with	Quantity
KF720-C1	1 battery	1
KF720-D1	2 batteries	1



Til løst fedt eller patroner / For bulk grease or cartridges



Til SIC patroner / For SIC cartridges

Batterier


For 19,2V KABI Accu fedtpresser.

Art.nr.	Batterier	Emb.
KF721	Lithium-ion, Batteri 19,2V	1

Batteries

For 19.2V KABI Cordless grease gun.

Art.#	Batteries	Quantity
KF721	Lithium-ion, Battery 19.2V	1


1 times lader

For 19,2V KABI Accu fedtpresser.

Art.nr.	Ladere	Emb.
KF723	Lithium-ion, Oplader 1-times	1

1 hour charger

For 19.2V KABI Cordless grease gun.

Art.#	Chargers	Quantity
KF723	Lithium-ion, Charger 1 Hour	1


Smøreslange 750mm

For 19,2V KABI Accu fedtpresser.

Art.nr.	Længde og tilslutning	Emb.
KF702	750mm 1/8"NPT	1

Hose 750mm

For 19.2V KABI Cordless grease gun.

Art.#	Length and connection	Quantity
KF702	750mm 1/8"NPT	1


Cylinder

For 19,2V KABI Accu fedtpresser.

Art.nr.	Type	Emb.
KF704	For løst fedt og patroner	1
KF705	For SIC patroner	1

Cylinder

For 19.2V KABI Cordless grease gun.

Art.#	Type	Quantity
KF704	For bulk grease and cartridges	1
KF705	For SIC cartridges	1



KF704



KF705

Batteri fedtpresse Alemite 20V Li-ion 2,5 Ah

20V fedtpresser med 1 eller 2 batterier. Denne nye model med Lithium-ion batteri har LCD display for angivelse af afgiven fedtmængde, restfedt i patron samt batteri niveau. Den har en 2 trins vælger for høj / lav fedt volume. Fedtpressens udformning, vægt og balance er designet til at give operatøren mindre fysisk belastning. Blødt komfortabelt greb. Fedtpresseren er forsynet med udluftningsventil, 900 mm højtryksslange og H-smøremundstykke. Den kan anvendes til såvel patroner samt løst fedt fra fade.

Leveres i handy plastkuffert med lader.

Ydelse: Trin 1 - 113 g/min. Trin 2 - 170 g/min.

Tilslutning: 1/8"NPT. Max. tryk: 690 bar.

Batteri: Lithium-ion 2500mAh. Ladetid: 70 min.

Art.nr.	Leveres med	Type	Emb.
AM596-C1	1 batteri	20 V - 2,5 Ah	1
AM596-D1	2 batterier	20 V - 2,5 Ah	1

Cordless grease gun Alemite 596 20V Li-ion

20 Volt grease gun with 1 or 2 batteries. This new model with Lithium-ion battery has an LCD display with real-time information for grease meter, grease level gauge and battery capacity gauge. Two flow rates – high and low. Shape, weight and balance designed for less physical strain. Soft, comfortable grip. The grease gun is supplied with air release valve and 900 mm high pressure hose with H-lubrican nozzle. It can be used with grease cartridges and bulk grease.

Supplied in a handy plastic case with charger.

Thread: 1/8"NPT. Max. pressure: 690 bar (10.000 psi).

Flow rate: High - 170 g/min (6 oz/min). Low - 113 g/min (4 oz/min).

Battery: Li-ion 2500 mAh - 20 Volt.

Battery charging time: 70 min.

Art.#	Delivered with	Type	Quantity
AM596-C1	1 battery	20 V - 2.5 Ah	1
AM596-D1	2 batteries	20 V - 2.5 Ah	1

**Batterier og lader for Alemite 596 20V**

Art.nr.	Batterier	Emb.
AM343291-2,5	20V Lithium-Ion 2.5Ah	1
AM343291-4,0	20V Lithium-Ion 4.0Ah	1

Art.nr.	1 times lader	Emb.
AM343299	20V Lithium-Ion 230V AC	1

Batteries and charger for Alemite 596 20V

Art.#	Batteries	Quantity
AM343291-2,5	20V Lithium-Ion 2.5Ah	1
AM343291-4,0	20V Lithium-Ion 4.0Ah	1

Art.#	1 hour charger	Quantity
AM343299	20V Lithium-Ion 230V AC	1

**36590-NPT**

Art.nr.	
AM340067	Højtryksslange 900mm 1/8"NPT
AM306740	Fyldenippel 1/8"NPT
KF407	Mundstykke, 4 kæber 1/8"NPT, ø17mm
36590-NPT	Mundstykke, 4 kæber 1/8"NPT, ø14mm

Accessories for Alemite 596 20V

Art.#	
AM340067	High Pressure hose 900mm 1/8"NPT
AM306740	Filler nipple 1/8"NPT
KF407	Coupler, 4-jaw 1/8"NPT, ø17mm
36590-NPT	Coupler, 4-jaw 1/8"NPT, ø14mm



AM340067

KABI Smøreslanger til fedtpressere

Thermoplastiske gummismøreslanger.

Tilslutningsgevind: 1/8"R.

Arb. tryk: 400 bar. Sprængningstryk: 950 bar.

Art.nr.	Længde	Emb.
KF412	300mm smøreslange	1
KF418	500mm smøreslange	1
KF424	600mm smøreslange	1
KF436	1000mm smøreslange	1
KF460	1500mm smøreslange	1

KABI Lubricating Hoses for Grease Guns

Thermoplastic rubber lubricating hoses.

Thread: 1/8"BSP.

Work pressure: 400 bar. Burst pressure: 950 bar.

Art.#	Length	Quantity
KF412	300mm lubricating hose	1
KF418	500mm lubricating hose	1
KF424	600mm lubricating hose	1
KF436	1000mm lubricating hose	1
KF460	1500mm lubricating hose	1

**KABI smøreslanger med mundstykker**

Thermoplastiske gummismøreslanger.

Tilslutningsgevind: 1/8"R.

Art.nr.	Længde	Emb.
35300	300mm + H-mundstykke	1
35450	500mm + H-mundstykke	1

KABI Lubricating Hoses with couplings

Thermoplastic rubber lubricating hoses.

Thread: 1/8"BSP.

Art.#	Length	Quantity
35300	300mm + 4 jaw coupling	1
35450	500mm + 4 jaw coupling	1

**Abnox, Gummi Højtrykssmøreslange**

Arbejdstryk: 700 bar.

Sprængningstryk: 1650 bar.

Art.nr.	Længde	Emb.
1035184	500mm (f. manometerpresse)	1

Abnox High Pressure Lubricating Hose

Work pressure: 700 bar.

Burst pressure: 1650 bar.

Art.#	Length	Quantity
1035184	500mm	1

**Smøreslange 300mm + træk-mundstykke**

Art.nr.	Emb.
35305 (for M + T-nipler) 16mm	1

Hose 300mm lubricating + M/T coupler

Art.#	Quantity
35305 (for M + T nipples) 16mm	1

**Smøreslange 300mm + bajonetmundstykke**

Art.nr.	Emb.
35310	1

Hose 300mm lubricating + bayonet coupling

Art.#	Quantity
35310	1

**Smøreslange 300mm + H-mundstykker & quick kobling, samt fjederflastning**

Art.nr.	Emb.
35555	1

Hose 300mm lubricating + 4 jaw couplings & quick coupling

Art.#	Quantity
35555	1

**Smørerør 150mm vinklet + H-mundstykke**

Art.nr.	Emb.
38487	1

Tube 150mm angled rigid + 4 jaw coupling

Art.#	Quantity
38487	1

**Smørerør 100mm lige + H-mundstykke**

Art.nr.	Emb.
38490	1

Tube 100mm straight + 4 jaw coupling

Art.#	Quantity
38490	1

**Smørerør med pensel**

Smørerør 100mm 1/8"R med 17mm kort pensel.

Penslen er lavet af PA og er forsynet med hætte med ø2 mm lufthul.

Art.nr.	Emb.
11369-SPEC Rør med penselhætte	1
11369K 17mm pensel m. kort hår	1

Tube with brush

Tube 100mm 1/8"BSP with 17mm short haired brush. The brush is made of PA, fitted with a plastic cap with a ø2 mm hole to avoid overpressure.

Art.#	Quantity
11369-SPEC Tube w. brush & cap	1
11369K 17mm short hair brush	1



11369-SPEC



11369K

Forlængerrør messing 1/8"R udv./indv.

Art.nr.	Forlængerrør	Emb.
90240	Forlængerrør 60mm	1
90245	Forlængerrør 100mm	1
90250	Forlængerrør 200mm	1

Extension Tube brass 1/8"BSP (M/F)

Art.#	Extension tube	Quantity
90240	Extension tube 60mm	1
90245	Extension tube 100mm	1
90250	Extension tube 200mm	1

**Tilslutningsrør stål**

Tilslutning 1/8"R.

Art.nr.	Længde	Emb.
35491	Lige 180mm	1
35485	Lige 450mm	1

Connecting Tube steel

Connection 1/8"BSP.

Art.#	Length	Quantity
35491	Straight 180mm	1
35485	Straight 450mm	1

**Tilslutningsrør stål**

Tilslutning 1/8"R.

Art.nr.	Længde	Emb.
35493	Bøjet 180mm	1
35486	Bøjet 450mm	1

Connecting Tube steel

Connection 1/8"BSP.

Art.#	Length	Quantity
35493	Angled 180mm	1
35486	Angled 450mm	1

**KABI Smørerør 100mm lige**

Tilslutning 1/8"R.

Art.nr.	Længde	Emb.
KF405	Lige 100mm	1

KABI Tube 100mm straight

Connection 1/8"BSP.

Art.#	Length	Quantity
KF405	Straight 100mm	1

**KABI Smørerør 150mm vinklet**

Tilslutning 1/8"R.

Art.nr.	Længde	Emb.
KF406	Bøjet 150mm	1

KABI Tube 150mm angled

Connection 1/8"BSP.

Art.#	Length	Quantity
KF406	Angled 150mm	1





Art.nr. / Art.#	Spec. / Type	Matr. / Material	Brug / Use	DIN / DIN	Emb. / Quantity
KF404	4 kæber / 4 jaws	Stål / Steel (ø15mm)	H	DIN 71412	1
KF407	4 kæber / 4 jaws	Stål / Steel - 1/8"NPT (ø17mm)	H	DIN 71412	1
36590	4 drejede kæber / turn-jaw type	Stål / Steel (ø14 x 35)	H	DIN 71412	1
38476	Skyde / Push on	Stål / Steel	H	DIN 71412	1
38483	3 kæber / 3 jaws	Stål / Steel (ø15mm)	H	DIN 71412	1
38484	3 kæber / 3 jaws - 360 gr	Stål / Steel (ø17mm)	H	DIN 71412	1
38410	Hul / Concave	Messing / Brass (ø11,5mm)	H + A (K)	DIN 71412/3402	1
38455	Hul / Concave	Stål, bruneret / Steel (ø12,2)	H	DIN 71412	1
38411	Spids / Nozzle	Messing / Brass (ø6mm)	B	DIN 3405	1
38470	Spids / Nozzle	Stål / Steel (ø4mm)	B	DIN 3405	1
38416	Spids / Pointed Nozzle	Stål / Steel			1
38417	Hul / Concave	Stål / Steel			1
38450	Kombi / Combi	Messing / Brass	H + B (D)	DIN 71412/3405	1
36550	Max. tryk / Max. pressure 700 bar	Stål, bruneret / Steel	H	DIN 71417	1
36590-NPT	4 drejede kæber / turn-jaw type	Stål / Steel - 1/8"NPT (ø14 x 35)	H	DIN 71412	1
36550-NPT	Max. tryk / Max. pressure 700 bar	Stål, bruneret / Steel - 1/8"NPT	H	DIN 71417	1



Art.nr. / Art.#	Spec. / Type	Matr. / Material	Brug / Use	DIN / DIN	Emb. / Quantity
36190	Træk / Hook on	Stål / Steel	M + T (ø16mm)	DIN 3404	1
36290	Træk, skub / Hook on, Push on	Stål / Steel	M + T (ø16mm)	DIN 3404	1
36390	Træk, skub / Hook on, Push on	Forniklet messing / Brass	M + T (ø16mm)	DIN 3404	1
38485	Træk / Hook on	Stål / Steel	M + T (ø16mm)	DIN 3404	1
38486	Skub / Hook on	Stål / Steel	M + T (ø16mm)	DIN 3404	1
38489	Skub, kardanled / Swiveling Push on	Stål / Steel	M + T (ø16mm)	DIN 3404	1
38488	Træk / Hook on	Stål / Steel	M (ø22mm)		1
38482	Træk / Hook on	Stål / Steel	M (ø10mm)		1



Art.nr. / Art.#	Spec. / Type	Matr. / Material	Brug / Use	DIN / DIN	Emb. / Quantity
38415	Spids m. gummi / Rubber nozzle	Stål, gummi / Steel, rubber	B/D	DIN 3405	1
38494	Bajonet / Pin type	Forniklet messing / Brass			1
38493	Bajonet + Lynkobling / Pin type + Quick connection	Forniklet messing / Brass			1
KF403	4 kæber og gribelås / 4 jaws and lock-on	Stål / Steel (ø16mm)	H	DIN 71412	1
KF408	Quicklås / Lock-on	Stål / Steel (ø15,7mm)	H		1
KF410	Quicklås / Lock-on	Stål / Steel (ø17mm)	H		1



38495



38401



38496



38402




38497



38403



38498



38404



38405

Art.nr. / Art.#	Spec. / Type	Matr. / Material	Brug / Use	DIN / DIN	Emb. / Quantity
38495	Lyn + spids / Quick connection + Pointed nozzle	Stål / Steel	B (D)	DIN 3405	1
38496	Lyn + hul / Quick connection + Concave nozzle	Stål / Steel	H + A (K)	DIN 71412	1
38497	Lyn + kardan / Quick connection + Recessed nozzle	Stål / Steel	Drivaksler / cardan, drive shaft		1
38498	Lyn + træk / Quick connection + Hook on type nozzle	Stål / Steel	M + T	DIN 3404	1
38401	Lyn + skub / Quick connection + Push type nozzle	Stål / Steel	H		1
38402	Lyn + spids m. gummi / Quick connection + Pointed w/Rubber nozzle	Stål / Steel	B/D	DIN 3405	1
38403	Lyn + kanyle / Quick connection + Needle nozzle	Stål / Steel	B/D		1
38404	Lyn + 90 gr. hul / Quick connection + 90 degree Concave nozzle	Stål / Steel	H + A/K		1
38405	Lyn + 3 kæber – 360 gr. / Quick connection + Angled H nozzle	Stål / Steel	H		1



38420



35590



35591



38491



38492

Art.nr. / Art.#	Spec. / Type	Matr. / Material	Brug / Use	DIN / DIN	Emb. / Quantity
38420	Lyn + Kanyle / Quick conn. + Needle nozzle	Rustfrit stål / Stainless steel (ø2,1 x 38mm)			1
38491	Kanyle / Needle nozzle	Stål / Steel (ø4,0 x 150mm)			1
38492	Kanyle / Needle nozzle	Stål / Steel (ø4,0 x 38mm)			1
35590	Universal m. teleskop / w. telescope	Stål, inkl. spids / Steel, incl. nozzle 35591	B/D	DIN 3405	1
35591	Spids / Nozzle for 35590	Stål, bruneret / Steel	B/D	DIN 3405	1

KABI Montørsæt - 7 stk. med lynkobling

7 stk. af de mest brugte smøremundstykker, der blot klikkes på det 4 kæbede mundstykke – og så er den klar til brug.

Leveres i praktisk rød plastic kuffert.

Art.nr.	Emb.
38705	1

KABI Lube Kit - 7 pcs. w/Quick Connections

7 pcs. of the most used lubricating adapters with Quick connection – ready to use.
Comes in a handy plastic suitcase.

Art.#	Quantity
38705	1



Fyldenippel AX med kugleventil

ø11mm konisk - længde 23mm - 1/8"R.

Art.nr. Emb.

40499 1

Fyldenippel FP813

ø14,5mm konisk - længde 15mm - 1/8"R.

Art.nr. Emb.

40496 1

Fyldenippel 91108

ø8,5mm - længde 25mm - 1/8"R.

Art.nr. Emb.

40498 1

Filler nipple AX with Build in Ball Check

ø11mm conical - length 23mm - 1/8"BSP.

Art.# Quantity

40499 1

Filler nipple FP813

ø14,5mm conical - length 15mm - 1/8"BSP.

Art.# Quantity

40496 1

Filler nipple 91108

ø8,5mm - length 25mm - 1/8"BSP.

Art.# Quantity

40498 1



40499



40496



40498

KABI fyldenippel for fedtpressere

Fyldenippel med 1/8"R til de fleste fedtpressere så fyldning fra KABI fedtfyldere er muligt. 1/8"R x ø9mm.

Art.nr. Emb.

40495 1

KABI Filler nipple for Grease Gun

Filler Nipple for the majority of grease guns which makes loading from KABI grease filler pump possible. 1/8"BSP x ø9mm.

Art.# Quantity

40495 1


Fyldenippel for Alemite

1/8"NPT x ø12,48 mm.

Art.nr. Emb.

AM306740 1

Filler nipple for Alemite

1/8"NPT x ø12.48 mm.

Art.# Quantity

AM306740 1


Påfyldningsadapter for fedtfyldere

For 40178 og 40185.
Til fyldenippel 40495 og 40496.

Art.nr. Emb.

40180 1

Filleradapter for grease filler pump

For 40178 and 40185.
For filler nipple 40495 and 40496.

Art.# Quantity

40180 1


KABI Udluftningsventil

Tilslutningsgevind 1/8"R.

Art.nr. Emb.

40490 1

KABI Air Release Valve

Thread 1/8"BSP.

Art.# Quantity

40490 1


Drejenippel med pakning (swivel)

Til brug mellem smøreslange og smørehoved.
Max. tryk: 400 bar. Gevind: 1/8"R indv. / 1/8"R udv.

Art.nr. Emb.

AX35290 1

Rotating Extension for coupler (swivel)

For mounting between hose and coupler. Max. pressure: 400 bar. Thread: 1/8"BSP (F) / 1/8"BSP (M).

Art.# Quantity

AX35290 1



KABI Trykluftdrevet fedt pumpe

Trykforhold 50:1. Min/max. Arb. tryk 2 bar/8 bar.
Arbejdsdruk: 7 bar. Kapacitet 1000 g/min. v. / 7 bar.
Tilslutning (luft) 1/4"R. Fedttilslutning 1/4"R.
Pumperør diameter ø30mm. Lyd niveau 81 db.
Luftforbrug: 230 l/min.

Art.nr.	Emb.
60445 20 kg – 440mm	1
60455 50 kg – 730mm	1
60465 200 kg – 950mm	1

Pumpen **skal** forsynes med tågesmøring (FRL unit) 60286.

KABI Air-Operated Grease Pump

Ratio 50:1. Min/max. Working pressure 2 bar/8 bar.
Operating pressure: 7 bar. Capacity 1000 g/min. at 7 bar. Connection (air) 1/4" BSP. Grease connection 1/4" BSP. Pump tubes diameter ø30mm. Sound level 81 db. Air consumption: 230 l/min.

Art.#	Quantity
60445 20 kg – 440mm	1
60455 50 kg – 730mm	1
60465 200 kg – 950mm	1

The pump **must** be fitted with mist lubricator (FRL unit) 60286.

**FRL unit**

Reduktionsventil med manometer, vandudskillers og tågesmøring. Tilslutning: 1/4"R.

Art.nr.	Emb.
60286	1

FRL unit

Reduction valve with pressure gauge. Water separator and mist lubricators. Thread: 1/4" BSP.

Art.#	Quantity
60286	1

**KABI Trykluftdrevne smøreapparater f. 18-25 kg**

Trykforhold 50:1 - 1000 g/min. ved 7 bar.
For fedt NLGI klasse 2.

Smøreapparat for 18-25 kg fedtspand.

- Trykluftdrevet højtrykspumpe
- Låg for fedtspand ø260 – 310 mm
- Transportvogn
- Højtryksslange 2 m.
- Højtryksfedtpistol med Z-drejeled, smørerør, mundstykke.

Pumpen **skal** forsynes med tågesmøring (FRL unit).

Art.nr.	Emb.
60442 Smøreapparater for 18-25 kg.	1
60443 Inkl. følgeplade 60472, ø250-288mm og FRL unit 60286	1

KABI Air-Operated Lubricator for 18-25 kg

Ratio 50:1 - 1000 g/min. at 7 bar.
For grease NLGI class 2.

Lubricator for a 18-25 kg grease bucket.

- Compressed air-operated high pressure pump
- Cover for grease bucket ø260 – 310 mm
- Drum trolley
- High pressure hose 2 m.
- High pressure grease gun w. Z-swivel, extension and 4-jaw coupler.

The pump **must** be fitted with mist lubricator (FRL unit).

Art.#	Quantity
60442 Lubricator for 18-25 kg.	1
60443 Incl. followerplate 60472, ø250-288mm and FRL unit 60286	1

**KABI Trykluftdrevne smøreapparater for 50 kg**

Trykforhold 50:1 - 1000 g/min. ved 7 bar.
For fedt NLGI klasse 2.

Smøreapparat for 50 kg fedtspand.

- Trykluftdrevet højtrykspumpe
- Låg for fedtspand ø331 – 381 mm
- Transportvogn
- Højtryksslange 2 m.
- Højtryksfedtpistol med Z-drejeled, smørerør, mundstykke.

Pumpen **skal** forsynes med tågesmøring (FRL unit).

Art.nr.	Emb.
60452 Smøreapparater for 50 kg.	1
60453 Inkl. følgeplade 60474, ø330-380mm og FRL unit 60286	1

KABI Air-Operated Lubricator for 50 kg

Ratio 50:1 - 1000 g/min. at 7 bar.
For grease NLGI class 2.

Lubricator for a 50 kg grease bucket.

- Compressed air-operated high pressure pump
- Cover for grease bucket ø331 – 381 mm
- Drum trolley
- High pressure hose 2 m.
- High pressure grease gun w. Z-swivel, extension and 4-jaw coupler.

The pump **must** be fitted with mist lubricator (FRL unit).

Art.#	Quantity
60452 Lubricator for 50 kg.	1
60453 Incl. followerplate 60474, ø330-380mm and FRL unit 60286	1

**KABI Trykluftdrevne smøreapparater for 200 kg**

Trykforhold 50:1 - 1000 g/min. ved 7 Bar.
For fedt NLGI klasse 2.

Smøreapparat for 200 kg fedtspand.

- Trykluftdrevet højtrykspumpe
- Låg for fedtspand ø560 – 610 mm
- Transportvogn
- Højtryksslange 2 m.
- Højtryksfedtpistol m. Z-drejeled, smørerør, mundstykke.

Pumpen **skal** forsynes med tågesmøring (FRL unit).

Art.nr.	Emb.
60462 Smøreapparater for 200 kg.	1
60463 Inkl. følgeplade 60475, ø550-602mm og FRL unit 60286	1

KABI Air-Operated Lubricator for 200 kg

Ratio 50:1 - 1000 g/min. at 7 Bar.
For grease NLGI class 2.

Lubricator for a 200 kg grease bucket.

- Compressed air-operated high pressure pump
- Cover for grease bucket ø560 – 610 mm
- Drum trolley
- High pressure hose 2 m.
- High pressure grease gun w. Z-swivel, extension and 4-jaw coupler.

The pump **must** be fitted with mist lubricator (FRL unit).

Art.#	Quantity
60462 Lubricator for 200 kg.	1
60463 Incl. followerplate 60475, ø550-602mm and FRL unit 60286	1



**KABI Trykluft smøreapparat 200 kg
Inkl. slangerulle 10 mtr. og smørepistol**

Stationært smøreapparat for 200 kg fedtspand inkl. 10 mtr. slangerulle, smørepistol, luftregulator med vandudskiller og tagesmøring (FRL unit). Trykforhold 50:1 - 1000 g/min. ved 7 bar frit udløb. For fedt NLGI klasse 2.

Sættet består af:
Trykluftdrevet højtrykspumpe (60465).
Låg for fedtspand ø560 - 602 mm (60485).
Slangerulle 10 mtr. åben (60600).
Drejeled (1048243).
Smørepistol med rør og mundstykke (6048500).
Regulator/vandudskiller/tagesmøring (60286).

Art.nr.	Længde	Pistol	Emb.
60650	10 mtr.	Manuel	1

**KABI Air-Operated Lubricator 200 kg
Incl. hose reel 10 mtr. and grease gun**

Stationary lubricator for 200 kg drums incl. 10 mtr. hose reel, grease gun, air pressure regulator with water separator and mist lubricator (FRL unit). Ratio 50:1 - 1000 g/min. at 7 bar free flow. For grease NLGI class 2.

The kit contains:
Air-operated high pressure pump (60465).
Cover for grease bucket ø560 - 602 mm (60485).
Hose reel 10 mtr. open (60600).
Z Swivel (1048243).
Grease gun with rigid tube and coupler (6048500).
Filter/regulator/mist lubricator unit (60286).

Art.#	Length	Grease gun	Quantity
60650	10 mtr.	Manual	1


**KABI Trykluft smøreapparat 200 kg
Inkl. slangerulle 10 mtr. og smørepistol**

Stationært smøreapparat for 200 kg fedtspand inkl. 10 mtr. slangerulle, digital smørepistol, luftregulator med vandudskiller og tagesmøring (FRL unit). Trykforhold 50:1 - 1000 g/min. ved 7 bar frit udløb. For fedt NLGI klasse 2.

Sættet består af:
Trykluftdrevet højtrykspumpe (60465).
Låg for fedtspand ø560 - 602 mm (60485).
Slangerulle 10 mtr. åben (60600).
Drejeled (6048243).
Smørepistol med rør og mundstykke (40487).
Regulator/vandudskiller/tagesmøring (60286).

Art.nr.	Længde	Pistol	Emb.
60651	10 mtr.	Digital	1

**KABI Air-Operated Lubricator 200 kg
Incl. hose reel 10 mtr. and grease gun**

Stationary lubricator for 200 kg drums incl. 10 mtr. hose reel, digital grease gun, air pressure regulator with water separator and mist lubricator (FRL unit). Ratio 50:1 - 1000 g/min. at 7 bar free flow. For grease NLGI class 2.

The kit contains:
Air-operated high pressure pump (60465).
Cover for grease bucket ø560 - 602 mm (60485).
Hose reel 10 mtr. open (60600).
Z Swivel (6048243).
Grease gun with rigid tube and coupler (40487).
Filter/regulator/mist lubricator unit (60286).

Art.#	Length	Grease gun	Quantity
60651	10 mtr.	Digital	1


**KABI Trykluft smøreapparat 200 kg
Inkl. slangerulle 15 mtr. og smørepistol**

Stationært smøreapparat for 200 kg fedtspand inkl. 15 mtr. slangerulle, smørepistol, luftregulator med vandudskiller og tagesmøring (FRL unit). Trykforhold 50:1 - 1000 g/min. ved 7 bar frit udløb. For fedt NLGI klasse 2.

Sættet består af:
Trykluftdrevet højtrykspumpe (60465).
Låg for fedtspand ø560 - 602 mm (60485).
Slangerulle 15 mtr. åben (60615).
Drejeled (1048243).
Smørepistol med rør og mundstykke (6048500).
Regulator/vandudskiller/tagesmøring (60286).

Art.nr.	Længde	Pistol	Emb.
60652	15 mtr.	Manuel	1

**KABI Air-Operated Lubricator 200 kg
Incl. hose reel 15 mtr. and grease gun**

Stationary lubricator for 200 kg drums incl. 15 mtr. hose reel, grease gun, air pressure regulator with water separator and mist lubricator (FRL unit). Ratio 50:1 - 1000 g/min. at 7 bar free flow. For grease NLGI class 2.

The kit contains:
Air-operated high pressure pump (60465).
Cover for grease bucket ø560 - 602 mm (60485).
Hose reel 15 mtr. open (60615).
Z Swivel (1048243).
Grease gun with rigid tube and coupler (6048500).
Filter/regulator/mist lubricator unit (60286).

Art.#	Length	Grease gun	Quantity
60652	15 mtr.	Manual	1


**KABI Trykluft smøreapparat 200 kg
Inkl. slangerulle 15 mtr. og smørepistol**

Stationært smøreapparat for 200 kg fedtspand inkl. 15 mtr. slangerulle, digital smørepistol, luftregulator med vandudskiller og tagesmøring (FRL unit). Trykforhold 50:1 - 1000 g/min. ved 7 bar frit udløb. For fedt NLGI klasse 2.

Sættet består af:
Trykluftdrevet højtrykspumpe (60465).
Låg for fedtspand ø560 - 602 mm (60485).
Slangerulle 15 mtr. åben (60615).
Drejeled (6048243).
Smørepistol med rør og mundstykke (40487).
Regulator/vandudskiller/tagesmøring (60286).

Art.nr.	Længde	Pistol	Emb.
60653	15 mtr.	Digital	1

**KABI Air-Operated Lubricator 200 kg
Incl. hose reel 15 mtr. and grease gun**

Stationary lubricator for 200 kg drums incl. 15 mtr. hose reel, digital grease gun, air pressure regulator with water separator and mist lubricator (FRL unit). Ratio 50:1 - 1000 g/min. at 7 bar free flow. For grease NLGI class 2.

The kit contains:
Air-operated high pressure pump (60465).
Cover for grease bucket ø560 - 602 mm (60485).
Hose reel 15 mtr. open (60615).
Z Swivel (6048243).
Grease gun with rigid tube and coupler (40487).
Filter/regulator/mist lubricator unit (60286).

Art.#	Length	Grease gun	Quantity
60653	15 mtr.	Digital	1



KABI Slangerulle for fedt 10 mtr.

Åben slangerulle 10 mtr. x 1/4" udv.
inkl. dreje/vippe montagebeslag.
Max. tryk: 345 bar.
Tilslutningsslange: 80 cm.
Tilslutningsgevind: 1/4" indv.

Art.nr.	Længde	Emb.
60600	10 mtr.	1

KABI Grease hose reel 10 mtr.

Open hose reel 10 mtr. x 1/4" (M)
incl. swivel mount bracket.
Max. pressure: 345 bar.
Connection hose: 80 cm.
Connection thread: 1/4" (F).

Art.#	Length	Quantity
60600	10 mtr.	1

**KABI Slangerulle for fedt 10 mtr.****Inkl. smørepistol og drejeled**

Åben slangerulle 10 mtr. x 1/4" udv.
inkl. dreje/vippe montagebeslag.
Max. tryk: 345 bar.
Tilslutningsslange: 80 cm.
Tilslutningsgevind: 1/4" indv.
Inkl. smørepistol (6048500)
og drejeled (1048243).

Art.nr.	Længde	Pistol	Emb.
60605	10 mtr.	Manuel	1

KABI Grease hose reel 10 mtr.**Incl. grease gun and Swivel**

Open hose reel 10 mtr. x 1/4" (M)
incl. swivel mount bracket.
Max. pressure: 345 bar.
Connection hose: 80 cm.
Connection thread: 1/4" (F).
Incl. grease gun (6048500)
and Z Swivel (1048243).

Art.#	Length	Grease gun	Quantity
60605	10 mtr.	Manual	1

**KABI Slangerulle for fedt 10 mtr.****Inkl. digital smørepistol og drejeled**

Åben slangerulle 10 mtr. x 1/4" udv.
inkl. dreje/vippe montagebeslag.
Max. tryk: 345 bar.
Tilslutningsslange: 80 cm.
Tilslutningsgevind: 1/4" indv.
Inkl. digital smørepistol (40487)
og drejeled (6048243).

Art.nr.	Længde	Pistol	Emb.
60610	10 mtr.	Digital	1

KABI Grease hose reel 10 mtr.**Incl. digital grease gun and Swivel**

Open hose reel 10 mtr. x 1/4" (M)
incl. swivel mount bracket.
Max. pressure: 345 bar.
Connection hose: 80 cm.
Connection thread: 1/4" (F).
Incl. digital grease gun (40487)
and Z Swivel (6048243).

Art.#	Length	Grease gun	Quantity
60610	10 mtr.	Digital	1

**KABI Slangerulle for fedt 15 mtr.**

Åben slangerulle 15 mtr. x 1/4" udv.
inkl. dreje/vippe montagebeslag.
Max. tryk: 345 bar.
Tilslutningsslange: 80 cm.
Tilslutningsgevind: 1/4" indv.

Art.nr.	Længde	Emb.
60615	15 mtr.	1

KABI Grease hose reel 15 mtr.

Open hose reel 15 mtr. x 1/4" (M)
incl. swivel mount bracket.
Max. pressure: 345 bar.
Connection hose: 80 cm.
Connection thread: 1/4" (F).

Art.#	Length	Quantity
60615	15 mtr.	1

**KABI Slangerulle for fedt 15 mtr.****Inkl. smørepistol og drejeled**

Åben slangerulle 15 mtr. x 1/4" udv.
inkl. dreje/vippe montagebeslag.
Max. tryk: 345 bar.
Tilslutningsslange: 80 cm.
Tilslutningsgevind: 1/4" indv.
Inkl. smørepistol (6048500)
og drejeled (1048243).

Art.nr.	Længde	Pistol	Emb.
60620	15 mtr.	Manuel	1

KABI Grease hose reel 15 mtr.**Incl. grease gun and Swivel**

Open hose reel 15 mtr. x 1/4" (M)
incl. swivel mount bracket.
Max. pressure: 345 bar.
Connection hose: 80 cm.
Connection thread: 1/4" (F).
Incl. grease gun (6048500)
and Z Swivel (1048243).

Art.#	Length	Grease gun	Quantity
60620	15 mtr.	Manual	1

**KABI Slangerulle for fedt 15 mtr.****Inkl. digital smørepistol og drejeled**

Åben slangerulle 15 mtr. x 1/4" udv.
inkl. dreje/vippe montagebeslag.
Max. tryk: 345 bar.
Tilslutningsslange: 80 cm.
Tilslutningsgevind: 1/4" indv.
Inkl. digital smørepistol (40487)
og drejeled (6048243).

Art.nr.	Længde	Pistol	Emb.
60625	15 mtr.	Digital	1

KABI Grease hose reel 15 mtr.**Incl. digital grease gun and Swivel**

Open hose reel 15 mtr. x 1/4" (M)
incl. swivel mount bracket.
Max. pressure: 345 bar.
Connection hose: 80 cm.
Connection thread: 1/4" (F).
Incl. digital grease gun (40487)
and Z Swivel (6048243).

Art.#	Length	Grease gun	Quantity
60625	15 mtr.	Digital	1



Højtryksfedtsmørepistol Booster

Med trykudligner. Til brug med smøreapparater. Ved normal aktivering 400 bar. For Booster funktion, tryk gentagende gange og opnå en trykforøgelse til max. 690 bar. Trykudligner for nem afmontering på nippel. Med rouleret greb. Leveres med 3 kæbet mundstykke, vinklet tilslutningsrør og Z-Drejeled. Tilslutning: indv. 1/4"R.

Art.nr. Emb.
6048500 1

KABI High Pressure Grease Gun Booster

With pressure relief valve. For air driven grease pumps. During normal activation 400 bar. For Booster function, press repeatedly and achieve a pressure increase to max. 690 bar. Pressure relief valve for easy dismount. Ergonomically grip. Comes with 3 jaw coupler, angled rigid tube and Z-swivel. Connection thread: 1/4" BSP (F).

Art.# Quantity
6048500 1

**KABI højtryksfedtsmørepistol Booster**

Med trykudligner. Til brug med smøreapparater. Ved normal aktivering 400 bar. For Booster funktion, tryk gentagende gange og opnå en trykforøgelse til max. 690 bar. Trykudligner for nem afmontering på nippel. Med rouleret greb. Leveres med 3 kæbet mundstykke, 300 mm smøreslange og Z-Drejeled. Tilslutning: indv. 1/4"R.

Art.nr. Emb.
6048501 1

KABI High Pressure Grease Gun Booster

With pressure relief valve. For air driven grease pumps. During normal activation 400 bar. For Booster function, press repeatedly and achieve a pressure increase to max. 690 bar. Pressure relief valve for easy dismount. Ergonomically grip. Comes with 3 jaw coupler, 300 mm outlet hose and Z-swivel. Connection thread: 1/4" BSP (F).

Art.# Quantity
6048501 1

**Trykudligner**

Til højtryksfedtsmørepistol.

Art.nr. Emb.
6048502 1

Pressure relief valve

For high pressure grease gun.

Art.# Quantity
6048502 1

**Højtryksfedtsmørepistol Booster**

Ved normal aktivering 400 bar. For Booster funktion, tryk gentagende gange og opnå hermed en trykforøgelse til max. 690 bar. Til smøreapparater. Med rouleret greb. Inkl. mundstykke og vinklet tilslutningsrør. Tilslutningsgevind: indv. 1/4"R.

Art.nr. Emb.
1048500 1

High Pressure Grease Gun Booster

During normal activation 400 bar. For Booster function, press repeatedly and achieve a pressure increase to max. 690 bar. For air driven grease pumps. Ergonomically grip. Incl. coupler and angled rigid tube. Connection thread: 1/4" BSP (F).

Art.# Quantity
1048500 1

**Højtryksfedtsmørepistol**

Til smøreapparater. Støbt greb. Inkl. mundstykke og vinklet tilslutningsrør. Tilslutningsgevind: indv. 1/4"R.

Art.nr. Emb.
40486 1

High Pressure Grease Gun

For air driven grease pumps. Molded grip. With coupler and angled connection pipe. Thread: 1/4" BSP (F).

Art.# Quantity
40486 1

**Digital fedtpistol**

Forud-indstillelig fedtpistol med smørerør og mundstykke. Kapacitet: 0,2–2,0 kg/min. Arb. tryk: max. 300bar. Arb. temperatur: min +2°C. Nøjagtighed: +/- 0,5%.

Art.nr. Tilslutning Emb.
40487 1/4"R udv. 1

Digital grease control gun

Pre-setting grease gun with lubricating pipe and nozzle. Capacity: 0.2–2.0 kg/min. Working pressure: max. 300bar. Working temperature: min +2°C. Accuracy: +/- 0.5%.

Art.# Connection Quantity
40487 1/4" BSP (M) 1



KABI drejeled (Z-type)

Tilslutningsgevind: udv. 1/4"R – udv. 1/4"R.

Art.nr.	Emb.
1048243	1

KABI Z-Swivel

Thread: 1/4"BSP (M) – 1/4"BSP (M).

Art.#	Quantity
1048243	1

**KABI drejeled (Z-type)**

Tilslutningsgevind: udv. 1/4"R – indv. 1/4"R.

Art.nr.	Emb.
6048243	1

KABI Z-Swivel

Thread: 1/4"BSP (M) – 1/4"BSP (F).

Art.#	Quantity
6048243	1

**Drejeled (Z-type)**

Tilslutningsgevind: udv. 1/8"NPT – udv. 1/2"27.

Art.nr.	Emb.
40489	1

Z-Swivel

Thread: 1/8"NPT (M) – 1/2"27 (M).

Art.#	Quantity
40489	1

**Drejeled lige**

Tilslutningsgevind: udv. 1/4"R – indv. 1/4"R.

Art.nr.	Emb.
40335	1

Straight Swivel

Thread: 1/4"BSP (M) – 1/4"BSP (F).

Art.#	Quantity
40335	1

**KABI låg for fedtspand**

Art.nr.	Størrelse	Emb.
60482	ø250 – 310 mm	1
60483	ø331 – 381 mm	1
60485	ø560 – 602 mm	1

KABI Cover for Grease Drum

Art.#	Size	Quantity
60482	ø250 – 310 mm	1
60483	ø331 – 381 mm	1
60485	ø560 – 602 mm	1

**KABI følgeplader**

Art.nr.	Størrelse	Emb.
60471	ø240 – 272 mm	1
60472	ø250 – 288 mm	1
40473	ø300 – 330 mm	1
60474	ø330 – 380 mm	1
60475	ø550 – 602 mm	1

KABI Follower Plates

Art.#	Size	Quantity
60471	ø240 – 272 mm	1
60472	ø250 – 288 mm	1
40473	ø300 – 330 mm	1
60474	ø330 – 380 mm	1
60475	ø550 – 602 mm	1

**Højtryksfedtslange**

Med 2 lag stål istøbt - 1/4"R indv. oml - 1/4"R indv. oml. - højtryksfittings i stål. Arb.tryk: 345bar - sprængtryk: 1840bar. Bøjningsradius: 100mm.

Art.nr.	Længde	Emb.
40355	2,0 meter	1
40356	4,0 meter	1
40360	6,0 meter	1
40362	10,0 meter	1
40363	15,0 meter	1

High Pressure Grease Hose

With 2 layers of casted steel 1/4"BSP (F) - 1/4"BSP (F) - high pressure fittings in steel. Work press.: 345bar - busting press.: 1840bar. Bend-radius: 100mm.


Art.#	Length	Quantity
40355	2,0 meter	1
40356	4,0 meter	1
40360	6,0 meter	1
40362	10,0 meter	1
40363	15,0 meter	1

**Eurolube låg for fedtspand**

Art.nr.	Størrelse	Emb.
40481	ø245 – 285mm	1
40482	ø280 – 320mm	1
40483	ø320 – 380mm	1
40484	ø360 – 408mm	1
40485	ø560 – 610mm	1

Eurolube Cover for Grease Drum

Art.#	Size	Quantity
40481	ø245 – 285mm	1
40482	ø280 – 320mm	1
40483	ø320 – 380mm	1
40484	ø360 – 408mm	1
40485	ø560 – 610mm	1

**Eurolube følgeplader**

Art.nr.	Størrelse	Emb.
40471	ø230 – 260mm	1
40472	ø260 – 290mm	1
40473	ø300 – 330mm	1
40474B	ø330 – 370mm	1
40474	ø360 – 390mm	1
40475	ø550 – 590mm	1

Eurolube Follower Plates

Art.#	Size	Quantity
40471	ø230 – 260mm	1
40472	ø260 – 290mm	1
40473	ø300 – 330mm	1
40474B	ø330 – 370mm	1
40474	ø360 – 390mm	1
40475	ø550 – 590mm	1



Transportvogn

For 18-60 kg fedtspand.

<i>Art.nr.</i>	<i>Emb.</i>
60436	1

Drum Trolley

For 18-60 kg Grease Bucket.

<i>Art.#</i>	<i>Quantity</i>
60436	1


Transportvogn

For 18-60 kg fedtspand.

<i>Art.nr.</i>	<i>Emb.</i>
40326	1

Drum Trolley

For 18-60 kg Grease Bucket.

<i>Art.#</i>	<i>Quantity</i>
40326	1


Transportvogn

For 18-60 kg fedtspand.

<i>Art.nr.</i>	<i>Emb.</i>
40801050	1

Drum Trolley

For 18-60 kg Grease Bucket.

<i>Art.#</i>	<i>Quantity</i>
40801050	1


Transportvogn

For 200 kg tromle.

<i>Art.nr.</i>	<i>Emb.</i>
40328	1

Trolley

For 200 kg Drum.

<i>Art.#</i>	<i>Quantity</i>
40328	1



Eurolube trykluftdrevne pumper

Luftmotoren er indvendigt coated, hvilket betyder at den ikke må oliesmøres/tågesmøres.

Trykforhold: 55:1.

Min/max. arb.tryk: 3 bar/10 bar.

Arbejdsdruk: 7 bar.

Lufttilslutning: 1/4"R.

Fedttilslutning: 1/4"R.

Pumperørsdiameter: ø26mm / ø40mm.

For fedt NLGI klasse 000 - 2.

Kapacitet ca. 700 g/min v/frit udløb, 7 bar, 20°.

Art.nr.		Emb.
40445	18/25 kg – 510mm	1
40455	50/60 kg – 725mm	1
40465	200 kg – 920mm	1

Eurolube Air-operated Grease Pumps

The air motor is coated inside, therefore do not use FRL units with these lubricators.

Ratio: 55:1.

Min/max. working pressure: 3 bar/10 bar.

Operating pressure: 7 bar.

Air connection: 1/4" BSP.

Grease connection: 1/4" BSP.

Diameter of pump tube: ø26mm / ø40mm.

For grease NLGI class 000 - 2.

Capacity: approx. 700 g/min.

Art.#		Quantity
40445	18/25 kg – 510mm	1
40455	50/60 kg – 725mm	1
40465	200 kg – 920mm	1

**Eurolube trykluftdrevne smøreapparater**

Smøreapparat for 18-25 kg fedtspand.

- Trykluftdrevet højtrykspumpe
- Låg for fedtspand
- Transportvogn
- 2 meter højtryksslange
- Højtryksfedtpistol, Z-drejeled, smørerør og mundstykke

Følgeplade bestilles separat for korrekt str./pasform.

Art.nr.	Emb.
40442	1

Eurolube Air-operated Grease Pump Unit

Portable Greaser for 18-25 kg.

- Air-operated pump
- Cover
- Trolley
- 2 meter high pressure hose
- High Pressure grease gun, Z-Swivel, extension and 4-jaw coupler

Follower plate to be ordered separately for correct size/fit.

Art.#	Quantity
40442	1

**Eurolube trykluftdrevne smøreapparater**

Smøreapparat for 18-25 kg fedtspand.

- Trykluftdrevet højtrykspumpe
- De luxe vogn med beskyttelseskabinat for fedtspand
- 2 meter højtryksslange
- Højtryksfedtpistol, Z-drejeled, smørerør og mundstykke

Følgeplade bestilles separat for korrekt str./pasform.

Art.nr.	Emb.
40443	1

Eurolube Air-operated Grease Pump Unit

Portable Greaser for 18-25 kg.

- Air-operated pump
- De luxe trolley with container to protect the grease bucket
- 2 meter high pressure hose
- High Pressure grease gun, Z-Swivel, extension and 4-jaw coupler

Follower plate to be ordered separately for correct size/fit.

Art.#	Quantity
40443	1

**Eurolube trykluftdrevne smøreapparater**

Smøreapparat for 50 kg fedtspand.

- Trykluftdrevet højtrykspumpe
- Låg for fedtspand
- Transportvogn
- 2 meter højtryksslange
- Højtryksfedtpistol, Z-drejeled, smørerør og mundstykke

Følgeplade bestilles separat for korrekt str./pasform.

Art.nr.	Emb.
40452	1

Eurolube Air-operated Grease Pump Unit

Portable Greaser for 50 kg.

- Air-operated pump
- Cover
- Trolley
- 2 meter high pressure hose
- High Pressure grease gun, Z-Swivel, extension and 4-jaw coupler

Follower plate to be ordered separately for correct size/fit.

Art.#	Quantity
40452	1

**Eurolube trykluftdrevne smøreapparater**

Smøreapparat for 200 kg fedtspand.

- Trykluftdrevet højtrykspumpe
- Låg for fedtspand
- Transportvogn
- 2 meter højtryksslange
- Højtryksfedtpistol, Z-drejeled, smørerør og mundstykke

Følgeplade bestilles separat for korrekt str./pasform.

Art.nr.	Emb.
40462	1

Eurolube Air-operated Grease Pump Unit

Portable Greaser for 200 kg.

- Air-operated pump
- Cover
- Trolley
- 2 meter high pressure hose
- High Pressure grease gun, Z-Swivel, extension and 4-jaw coupler

Follower plate to be ordered separately for correct size/fit.

Art.#	Quantity
40462	1



Abnox trykluftdrevne pumper

Trykforhold: 10:1. Ydelse: 1190 gr./min.
For fedt NLGI-klasse 3.

Art.nr.		Emb.
1040361	Fedtpumpe 370mm (18 kg)	1
1040362	Fedtpumpe 473mm (25 kg)	1
1040363	Fedtpumpe 720mm (50 kg)	1
1040364	Fedtpumpe 845mm (200 kg)	1

Abnox Air-operated grease pump

Ratio: 10:1. Flow: 1190 gr./min.
For Grease up to NLGI 3.

Art.#		Quantity
1040361	Grease pump 370mm (18 kg)	1
1040362	Grease pump 473mm (25 kg)	1
1040363	Grease pump 720mm (50 kg)	1
1040364	Grease pump 845mm (200 kg)	1



Abnox trykluftdrevne pumper

Trykforhold: 60:1. Ydelse: 500 gr./min.
For fedt NLGI-klasse 3.

Art.nr.		Emb.
1040351	Fedtpumpe 370mm (18 kg)	1
1040352	Fedtpumpe 473mm (25 kg)	1
1040353	Fedtpumpe 720mm (50 kg)	1
1040354	Fedtpumpe 845mm (200 kg)	1

Fedtpumper med trykforhold 5:1 og 20:1
forefindes også.

Abnox Air-operated grease pump

Ratio: 60:1. Flow: 500 gr./min.
For Grease up to NLGI 3.

Art.#		Quantity
1040351	Grease pump 370mm (18 kg)	1
1040352	Grease pump 473mm (25 kg)	1
1040353	Grease pump 720mm (50 kg)	1
1040354	Grease pump 845mm (200 kg)	1

Grease pumps with ratio 5:1 & 20:1 on request.



Abnox trykluftdrevne smøreapparater

Udveksling: 60:1 - 500 g/min. For fedt op til NLGI 3.

Smøreapparat for 14-18 kg fedtspand.

- Trykluftdrevet højtrykspumpe
- Låg for fedtspand
- Følgepladesæt (ø255-ø290mm)
- Beskyttelsesspand for fedtspand
- 4m højtryksslange
- Højtryksfedtpistol, Z-drejeled, smørerør og mundstykke

Art.nr.	Emb.
1040340	1

Abnox Air-operated grease pump units

Ratio: 60:1 - 500 g/min, up to Grease NLGI 3.

Greaser for 14-18 kg.

- Air-operated pump
- Cover
- Protect container
- Follower plate (ø255-ø290mm)
- 4 meter high pressure hose
- High Pressure grease gun, Z-Swivel, extension and 4-jaw coupler

Art.#	Quantity
1040340	1

**Abnox trykluftdrevne smøreapparater**

Udveksling: 60:1 - 500 g/min. For fedt op til NLGI 3.

Smøreapparat for 20-25 kg fedtspand.

- Trykluftdrevet højtrykspumpe
- Låg for fedtspand
- Følgepladesæt (ø290-ø350mm)
- Beskyttelsesspand for fedtspand
- 4m højtryksslange
- Højtryksfedtpistol, Z-drejeled, smørerør og mundstykke

Art.nr.	Emb.
1040341	1

Abnox Air-operated grease pump units

Ratio: 60:1 - 500 g/min, up to Grease NLGI 3.

Greaser for 20-25 kg.

- Air-operated pump
- Cover
- Protect container
- Follower plate (ø290-ø350mm)
- 4 meter high pressure hose
- High Pressure grease gun, Z-Swivel, extension and 4-jaw coupler

Art.#	Quantity
1040341	1

**Abnox trykluftdrevne smøreapparater**

Udveksling: 60:1 - 500 g/min. For fedt op til NLGI 3.

Smøreapparat for 50 kg fedtspand.

- Trykluftdrevet højtrykspumpe
- Låg for fedtspand, justerbart
- Følgepladesæt (ø350-ø410mm)
- Direkte montage på fedtspand
- 4m højtryksslange
- Højtryksfedtpistol, Z-drejeled, smørerør og mundstykke

Art.nr.	Emb.
1040342	1

Abnox Air-operated grease pump units

Ratio: 60:1 - 500 g/min, up to Grease NLGI 3.

Greaser for 50 kg.

- Air-operated pump
- Cover
- Follower plate (ø350-ø410mm)
- 4 meter high pressure hose
- High Pressure grease gun, Z-Swivel, extension and 4-jaw coupler

Art.#	Quantity
1040342	1

**Abnox trykluftdrevne smøreapparater**

Udveksling: 60:1 - 500 g/min. For fedt op til NLGI 3.

Smøreapparat for 200 kg fedtspand.

- Trykluftdrevet højtrykspumpe
- Låg for fedtspand
- Følgepladesæt (ø560-ø600mm)
- Direkte montage på fedtspand
- 4m højtryksslange
- Højtryksfedtpistol, Z-drejeled, smørerør og mundstykke

Art.nr.	Emb.
1040344	1

Abnox Air-operated grease pump units

Ratio: 60:1 - 500 g/min, up to Grease NLGI 3.

Greaser for 200 kg.

- Air-operated pump
- Cover
- Follower plate (ø560-ø600mm)
- 4 meter high pressure hose
- High Pressure grease gun, Z-Swivel, extension and 4-jaw coupler

Art.#	Quantity
1040344	1



ABNOX Elektrisk smøreapparat 14 - 18 kg

Denne elektriske fedtpumpe AX-2000, sikrer en pålidelig og problemfri smøring, når trykluft ikke er tilgængeligt. Med et arbejdstryk på op til 200 bar, kan de fleste smøreopgaver udføres. Trykket styres af en indbygget trykregulator, som sikrer at smørestedet ikke bliver unødvendigt overbelastet. Speciel forbindelse mellem motor og gearkasse garanterer en jævn og problemfri pumpning af fedt, samt et lavt støjniveau.

Fedt op til NLGI 2 / 5000 m Pa.s.
Kapacitet: 280 cm³/min. v/20°C. Frit udløb.
Min./max. temperatur: 10°C / 40°C.
Motor: 230V AC, 50/60Hz, 15 Amp, 0,40 kW, IP55.

Leveres med:
Beskyttelsescontainer, ø285 x H 380 mm.
Følgeplade ø255 - 290 mm. (1043270).
4 mtr. højtryksslange 1/4"R indv./indv.
Z-drejeled 1/4" x 1/4"R udv./udv.
Smørepipistol med rør og mundstykke.

Art.nr. Emb.
1043540 1

ABNOX Electric lubricator 14 - 18 kg

The Electric Grease Supply System AX-2000 permit reliable and trouble free lubrication when ever no compressed air is available. With a working pressure up to 200 bar, most lubrication tasks can be performed. The pressure is controlled by a built-in regulator, which ensures that the lubrication point is not overloaded. Special connection between engine and gearbox guarantees a smooth and trouble free pumping and avery low noise level.

For grease up to NLGI 2 / 5000 m Pa.s.
Capacity: 280 cm³/min. by 20°C. Free flow.
Min./max. temperature: 10°C / 40°C.
Motor: 230V AC, 50/60Hz, 15 Amp, 0.40 kW, IP55.

Comes with:
Protection container, ø285 x H 380 mm.
Follower plate ø255 - 290 mm. (1043270).
4 mtr. high pressure hose 1/4"BSP F/F.
Z swivel 1/4" x 1/4" BSP M/M.
Grease gun with rigid tube and coupler.

Art.# Quantity
1043540 1

**ABNOX Elektrisk smøreapparat 20 - 25 kg**

Denne elektriske fedtpumpe AX-2000, sikrer en pålidelig og problemfri smøring, når trykluft ikke er tilgængeligt. Med et arbejdstryk på op til 200 bar, kan de fleste smøreopgaver udføres. Trykket styres af en indbygget trykregulator, som sikrer at smørestedet ikke bliver unødvendigt overbelastet. Speciel forbindelse mellem motor og gearkasse garanterer en jævn og problemfri pumpning af fedt, samt et lavt støjniveau.

Fedt op til NLGI 2 / 5000 m Pa.s.
Kapacitet: 280 cm³/min. v/20°C. Frit udløb.
Min./max. temperatur: 10°C / 40°C.
Motor: 230V AC, 50/60Hz, 15 Amp, 0,40 kW, IP55.

Leveres med:
Beskyttelsescontainer, ø375 x H 480 mm.
Følgeplade ø290 - 350 mm. (1043271).
4 mtr. højtryksslange 1/4"R indv./indv.
Z-drejeled 1/4" x 1/4"R udv./udv.
Smørepipistol med rør og mundstykke.

Art.nr. Emb.
1043541 1

ABNOX Electric lubricator 20 - 25 kg

The Electric Grease Supply System AX-2000 permit reliable and trouble free lubrication when ever no compressed air is available. With a working pressure up to 200 bar, most lubrication tasks can be performed. The pressure is controlled by a built-in regulator, which ensures that the lubrication point is not overloaded. Special connection between engine and gearbox guarantees a smooth and trouble free pumping and avery low noise level.

For grease up to NLGI 2 / 5000 m Pa.s.
Capacity: 280 cm³/min. by 20°C. Free flow.
Min./max. temperature: 10°C / 40°C.
Motor: 230V AC, 50/60Hz, 15 Amp, 0.40 kW, IP55.

Comes with:
Protection container, ø375 x H 480 mm.
Follower plate ø290 - 350 mm. (1043271).
4 mtr. high pressure hose 1/4"BSP F/F.
Z swivel 1/4" x 1/4" BSP M/M.
Grease gun with rigid tube and coupler.

Art.# Quantity
1043541 1

**ABNOX Elektrisk smøreapparat 50 kg**

Denne elektriske fedtpumpe AX-2000, sikrer en pålidelig og problemfri smøring, når trykluft ikke er tilgængeligt. Med et arbejdstryk på op til 200 bar, kan de fleste smøreopgaver udføres. Trykket styres af en indbygget trykregulator, som sikrer at smørestedet ikke bliver unødvendigt overbelastet. Speciel forbindelse mellem motor og gearkasse garanterer en jævn og problemfri pumpning af fedt, samt et lavt støjniveau.

Fedt op til NLGI 2 / 5000 m Pa.s.
Kapacitet: 280 cm³/min. v/20°C. Frit udløb.
Min./max. temperatur: 10°C / 40°C.
Motor: 230V AC, 50/60Hz, 15 Amp, 0,40 kW, IP55.
Leveres uden beskyttelsescontainer.

Leveres med:
Følgeplade ø350 - 410 mm. (1043272).
4 mtr. højtryksslange 1/4"R indv./indv.
Z-drejeled 1/4" x 1/4"R udv./udv.
Smørepipistol med rør og mundstykke.

Art.nr. Emb.
1043542 1

ABNOX Electric lubricator 50 kg

The Electric Grease Supply System AX-2000 permit reliable and trouble free lubrication when ever no compressed air is available. With a working pressure up to 200 bar, most lubrication tasks can be performed. The pressure is controlled by a built-in regulator, which ensures that the lubrication point is not overloaded. Special connection between engine and gearbox guarantees a smooth and trouble free pumping and avery low noise level.

For grease up to NLGI 2 / 5000 m Pa.s.
Capacity: 280 cm³/min. by 20°C. Free flow.
Min./max. temperature: 10°C / 40°C.
Motor: 230V AC, 50/60Hz, 15 Amp, 0.40 kW, IP55.
Comes without protection container.

Comes with:
Follower plate ø350 - 410 mm. (1043272).
4 mtr. high pressure hose 1/4"BSP F/F.
Z swivel 1/4" x 1/4" BSP M/M.
Grease gun with rigid tube and coupler.

Art.# Quantity
1043542 1



ABNOX Elektrisk smøreapparat 180 kg

Denne elektriske fedtpumpe AX-2000, sikrer en pålidelig og problemfri smøring, når trykluft ikke er tilgængeligt. Med et arbejdsstryk på op til 200 bar, kan de fleste smøreopgaver udføres. Trykket styres af en indbygget trykregulator, som sikrer at smørestedet ikke bliver unødigt overbelastet. Speciel forbindelse mellem motor og gearkasse garanterer en jævn og problemfri pumpning af fedt, samt et lavt støjniveau.

Fedt op til NLGI 2 / 5000 m Pa.s.

Kapacitet: 280 cm³/min. v/20°C. Frit udløb.

Min./max. temperatur: 10°C / 40°C.

Motor: 230V AC, 50/60Hz, 15 Amp, 0,40 kW, IP55.

Leveres uden beskyttelsescontainer.

Leveres med:

Følgeplade ø560 - 600 mm. (1043273).

4 mtr. højtryksslange 1/4"R indv./indv.

Z-drejeled 1/4" x 1/4"R udv./udv.

Smørepestol med rør og mundstykke.

Art.nr. Emb.

1043544 1

ABNOX Electric lubricator 180 kg

The Electric Grease Supply System AX-2000 permit reliable and trouble free lubrication when ever no compressed air is available. With a working pressure up to 200 bar, most lubrication tasks can be performed. The pressure is controlled by a built-in regulator, which ensures that the lubrication point is not overloaded. Special connection between engine and gearbox guarantees a smooth and trouble free pumping and a very low noise level.

For grease up to NLGI 2 / 5000 m Pa.s.

Capacity: 280 cm³/min. by 20°C. Free flow.

Min./max. temperature: 10°C / 40°C.

Motor: 230V AC, 50/60Hz, 15 Amp, 0.40 kW, IP55.

Comes without protection container.

Comes with:

Follower plate ø560 - 600 mm. (1043273).

4 mtr. high pressure hose 1/4"BSP F/F.

Z swivel 1/4" x 1/4" BSP M/M.

Grease gun with rigid tube and coupler.

Art.# Quantity

1043544 1



KABI fedtfylder

Fedtfylder for direkte fyldning fra 18-20 kg fedt-emballage.

Passer til fyldeknippel: 9 mm og 14,5 mm konisk.

Yder 28g pr. slag.

Låg: ø260 – 310mm.

Følgeplade: ø255 – 282mm.

Art.nr. Emb.

40178 1

KABI Grease Filler Pump

Grease filler pump for filling, from 18-20 kg grease bucket.

Fits with filler nipple: 9 mm and 14,5 mm conical.

Output: 28g per stroke.

Cover: ø260 – 310mm.

Follower plate: ø255 – 282mm.

Art.# Quantity

40178 1


KABI fedtfylder

Fedtfylder for direkte fyldning fra 50-60 kg fedt-emballage.

Passer til fyldeknippel: 9 mm og 14,5 mm konisk.

Låg: ø331 – 381mm.

Følgeplade: ø322 – 380mm.

Art.nr. Emb.

40185 1

KABI Grease Filler Pump

Grease filler pump for filling, from 50-60 kg grease bucket.

Fits with filler nipple: 9 mm and 14,5 mm conical.

Cover: ø331 – 381mm.

Follower plate: ø322 – 380mm.

Art.# Quantity

40185 1


Abnox Fedtfyldere

Fedtfylderne er inkl. beskyttelsesspand op til 25 kg for at undgå buler og defekt i fedtspanden. Fedtfylderne er inkl. flere følgeplader så man ikke er afhængig af den samme fedtleverandør. Der kan tilsluttes smøreslange for fyldning af centralsmøresystemer.

Art.nr. Fedtfylder for

1044360 15-18 kg (ø300mm beskyttel.spand)

1044365 20-25 kg (ø375mm beskyttel.spand)

1044370 50 kg (Lev. excl. beskyttelsesspand)

ABNOX grease filler pumps

The grease fillers are including protection bucket up to 25 kg to avoid dents and defect in the bucket. The grease filler pumps are including a follower plate set. By connecting extra hose, it is possible to use the pump for filling of centralized lubrication systems.

Art.# For

1044360 15-18 kg (ø300mm protection bucket)

1044365 20-25 kg (ø375mm protection bucket)

1044370 50 kg (w/o protection bucket)


Fedtfylder for centralsmøring

Fedtfylder for hurtig, sikker og ren påfyldning af fedtbeholdere til centralsmøring.

Kapacitet: 80 gram pr. pumpeslag.

Tromlestr.: 18-20 kg.

Leveres med: pumpe, låg ø280-320mm og

1,5 mtr. slange med quick kobling.

Passer til quick kobling CS100-206.

Art.nr. Emb.

4020721 1

Grease Filler Pump for Central Lubrication

A grease filler pump for quick, safe and clean filling into the greasecontainer of central lubrication.

Capacity: 80 gram per stroke.

Barrel size: 18-20 kg.

Supplied with: pump, cover ø280-320mm and

1,5 mtr. hose with quick coupling.

Fits with quick coupling CS100-206.

Art.# Quantity

4020721 1



Fedtsmørekop system "Stauffer"**Blå oxideret stål**

Art.nr.	Nr.	Gevind	Emb.
11101	1	1/8"R	1
11102	2	1/4"R	1
11103	3	1/4"R	1
11104	4	1/4"R	1
11105	5	1/4"R	1
11106	6	1/4"R	1

Messing

Art.nr.	Nr.	Gevind	Emb.
11205	00	M6	1
11214	2	1/8"R	1
11216	2	1/4"R	1
11228	8	3/8"R	1

Lubrication Nipple System "Stauffer"**Blue oxidized steel**

Art.#	No	Thread	Quantity
11101	1	1/8"BSP	1
11102	2	1/4"BSP	1
11103	3	1/4"BSP	1
11104	4	1/4"BSP	1
11105	5	1/4"BSP	1
11106	6	1/4"BSP	1

Brass

Art.#	No	Thread	Quantity
11205	00	M6	1
11214	2	1/8"BSP	1
11216	2	1/4"BSP	1
11228	8	3/8"BSP	1

**Automatisk fedtsmørekop SBK-50**

Giver jævn fedttilførsel med kontrol af smøring og forbrug gennem den transparente kunststof-beholder. Forsynet med reguleringsskrue, overtryksventil samt smørenippel for påfyldning. Monterbar i alle vinkler. Huset er i messing.

Art.nr.	Indhold	Gevind	Emb.
11913	55ccm	1/8"R	1
11923	55ccm	1/4"R	1
11925	55ccm	1/4"R (inkl. lukkeskrue)	1

Automatic Lubricator SBK-50

Performs an even amount of grease to be controlled through the transparent container, equipped with adjustment screw and pressure relief valve. Refilling the lubricator through a H1 grease nipple makes it easy to use.

Art.#	Capacity	Thread	Quantity
11913	55ccm	1/8"BSP	1
11923	55ccm	1/4"BSP	1
11925	55ccm	1/4"BSP (incl. on/off)	1




**El. galvaniseret /
Zink plated**
Gevind / Thread

M5 x 0,8
 M6 x 0,75
 M6 x 1,00
 M7 x 1,00
 M8 x 0,75
 M8 x 1,00
 M8 x 1,25
 M10 x 1,00
 M10 x 1,50
 M12 x 1,00
 M12 x 1,50
 M12 x 1,75
 M14 x 1,50
 1/8"R / BSP
 1/4"R / BSP
 3/8"R / BSP
 1/2"R / BSP
 1/4" SAE / UNF
 5/16" SAE / UNF
 3/8" SAE / UNF
 1/4" Whitw
 5/16" Whitw
 3/8" Whitw
 1/4" BSF
 5/16" BSF
 3/8" BSF
 1/8" x 27NPT
 1/4" x 18NPT

**H1 (Lige / Straight)
DIN 71412, Form A**

Art.nr. / Art.#	Emb. / Quantity
12105	100 stk / pcs
12108	100 stk / pcs
12112	100 stk / pcs
12116	100 stk / pcs
12128	100 stk / pcs
12132	100 stk / pcs
12134	100 stk / pcs
12158	100 stk / pcs
12160	100 stk / pcs
12166	100 stk / pcs
12168	100 stk / pcs
12172	100 stk / pcs
12173	50 stk / pcs
12152	100 stk / pcs
12162	100 stk / pcs
12182	50 stk / pcs
12184	50 stk / pcs
12120	100 stk / pcs
12138	100 stk / pcs
12146	100 stk / pcs
12118	100 stk / pcs
12136	100 stk / pcs
12144	100 stk / pcs
12124	100 stk / pcs
12142	100 stk / pcs
12148	100 stk / pcs
12156	100 stk / pcs
12165	100 stk / pcs

**H2 (45°)
DIN 71412, Form B**

Art.nr. / Art.#	Emb. / Quantity
12205	100 stk / pcs
12208	100 stk / pcs
12212	100 stk / pcs
12216	100 stk / pcs
12228	100 stk / pcs
12232	100 stk / pcs
12234	100 stk / pcs
12258	100 stk / pcs
12260	100 stk / pcs
12268	100 stk / pcs
12272	50 stk / pcs
12252	100 stk / pcs
12262	50 stk / pcs
12282	50 stk / pcs
12220	100 stk / pcs
12238	100 stk / pcs
12246	100 stk / pcs
12218	100 stk / pcs
12236	100 stk / pcs
12244	100 stk / pcs
12224	100 stk / pcs
12242	100 stk / pcs
12248	100 stk / pcs
12256	100 stk / pcs
12265	100 stk / pcs

**H3 (90°)
DIN 71412, Form C**

Art.nr. / Art.#	Emb. / Quantity
12305	100 stk / pcs
12308	100 stk / pcs
12312	100 stk / pcs
12316	100 stk / pcs
12328	100 stk / pcs
12332	100 stk / pcs
12334	100 stk / pcs
12358	100 stk / pcs
12360	100 stk / pcs
12372	50 stk / pcs
12352	50 stk / pcs
12362	50 stk / pcs
12382	50 stk / pcs
12320	100 stk / pcs
12338	100 stk / pcs
12346	100 stk / pcs
12318	100 stk / pcs
12336	100 stk / pcs
12344	100 stk / pcs
12324	100 stk / pcs
12342	100 stk / pcs
12348	100 stk / pcs
12356	100 stk / pcs

Smørenipler med selvskærende gevind / Grease nipples with self forming threads

**El. galvaniseret /
Zink plated**
Gevind / Thread

M6 selvskærende / self tapping
 M8 selvskærende / self tapping
 M10 selvskærende / self tapping

H1 (Lige / Straight)

Art.nr. / Art.#	Emb. / Quantity
17112	100 stk / pcs
17132	100 stk / pcs
17158	100 stk / pcs

H2 (45°)

Art.nr. / Art.#	Emb. / Quantity
17212	100 stk / pcs
17232	100 stk / pcs
17258	100 stk / pcs

H3 (90°)

Art.nr. / Art.#	Emb. / Quantity
17312	100 stk / pcs
17332	100 stk / pcs



El. galvaniseret /
Zink plated

Gevind / Thread

M6 x 1,00 (29mm)
M8 x 1,00 (29mm)
1/8"R / BSP (44mm)
1/4" SAE (29mm)
1/4" BSF (29mm)

H1 (Lige / Straight)
DIN 71412, Lang / Long model

Art.nr. / Art.#	Emb. / Quantity
12114	100 stk / pcs
12135	100 stk / pcs
12154	100 stk / pcs
12122	100 stk / pcs
12126	100 stk / pcs



El. galvaniseret /
Zink plated

Gevind / Thread

4mm glat tap / drive fit
5mm glat tap / drive fit
6mm glat tap / drive fit
8mm glat tap / drive fit
10mm glat tap / drive fit

H1 (Lige / Straight)
DIN 71412, Form D

Art.nr. / Art.#	Emb. / Quantity
12174	100 stk / pcs
12175	100 stk / pcs
12176	100 stk / pcs
12178	100 stk / pcs
12180	100 stk / pcs



H2 (45°)
DIN 71412, Form D

Art.nr. / Art.#	Emb. / Quantity
12276	100 stk / pcs
12278	100 stk / pcs
12280	100 stk / pcs



H3 (90°)
DIN 71412, Form D

Art.nr. / Art.#	Emb. / Quantity
12376	100 stk / pcs
12378	100 stk / pcs
12380	100 stk / pcs



El. galvaniseret /
Zink plated

Gevind / Thread

M5 x 0,8
M6 x 1,0
M8 x 1,0
M8 x 1,25
M10 x 1,0
M10 x 1,5
M12 x 1,5
1/8"R / BSP
1/4"R / BSP
3/8"R / BSP

B1 / D1 (Lige / Straight)
DIN 3405

Art.nr. / Art.#	Emb. / Quantity
14105	
14112	100 stk / pcs
14132	100 stk / pcs
14134	100 stk / pcs
14158	100 stk / pcs
14160	100 stk / pcs
14168	100 stk / pcs
14152	100 stk / pcs
14162	100 stk / pcs
14182	50 stk / pcs



B2 / D2 (45°)
DIN 3405

Art.nr. / Art.#	Emb. / Quantity
14212	100 stk / pcs
14232	100 stk / pcs
14234	100 stk / pcs
14258	100 stk / pcs
14252	100 stk / pcs



B3 / D3 (90°)
DIN 3405

Art.nr. / Art.#	Emb. / Quantity
14312	100 stk / pcs
14332	100 stk / pcs
14358	100 stk / pcs
14352	100 stk / pcs



El. galvaniseret /
Zink plated

Gevind / Thread

4mm glat tap / drive fit
5mm glat tap / drive fit
6mm glat tap / drive fit
8mm glat tap / drive fit
10mm glat tap / drive fit

B1 / D1 (Lige / Straight)
DIN 3405

Art.nr. / Art.#	Emb. / Quantity
14174	100 stk / pcs
14175	100 stk / pcs
14176	100 stk / pcs
14178	100 stk / pcs
14180	100 stk / pcs

B2 / D2 (45°)
DIN 3405

Art.nr. / Art.#	Emb. / Quantity
14276	100 stk / pcs
14278	100 stk / pcs

B3 / D3 (90°)
DIN 3405

Art.nr. / Art.#	Emb. / Quantity
14376	100 stk / pcs
14378	100 stk / pcs



(Button head)

**El. galvaniseret /
Zink plated****M1 (Lige / Straight)
DIN 3404, ø16mm**

Gevind / Thread	Art.nr. / Art.#	Emb. / Quantity
M6 x 1,0	16112	50 stk / pcs
M8 x 1,0	16132	50 stk / pcs
M8 x 1,25	16134	50 stk / pcs
M10 x 1,0	16158	50 stk / pcs
M10 x 1,5	16160	50 stk / pcs
M12 x 1,5	16168	50 stk / pcs
M12 x 1,75	16172	50 stk / pcs
M16 x 1,5	16175	50 stk / pcs
1/8"R / BSP	16152	50 stk / pcs
1/4"R / BSP	16162	50 stk / pcs
3/8"R / BSP	16182	50 stk / pcs
1/2"R / BSP	16184	50 stk / pcs
1/4"Whitw	16118	50 stk / pcs



(Button head)

**El. galvaniseret /
Zink plated****M22 (Lige / Straight)
DIN 3404, ø22mm**

Gevind / Thread	Art.nr. / Art.#	Emb. / Quantity
M10 x 1,0	16485	50 stk / pcs
M16 x 1,5	16490	50 stk / pcs
1/4"R / BSP	16401	50 stk / pcs
3/8"R / BSP	16482	50 stk / pcs
1/2"R / BSP	16484	50 stk / pcs

(Sekskantet hoved)
(Hexagonal head)**El. galvaniseret /
Zink plated****T1 / B (Lige / Straight)
DIN 3404**

Gevind / Thread	Art.nr. / Art.#	Emb. / Quantity
M6 x 1,0	15112	50 stk / pcs
M8 x 1,0	15132	50 stk / pcs
M8 x 1,25	15134	50 stk / pcs
M10 x 1,0	15158	50 stk / pcs
M10 x 1,5	15160	50 stk / pcs
M12 x 1,5	15168	50 stk / pcs
M12 x 1,75	15172	50 stk / pcs
1/8"R / BSP	15152	50 stk / pcs
1/4"R / BSP	15162	50 stk / pcs
3/8"R / BSP	15182	50 stk / pcs

**DV1
DIN 3405**

Art.nr. / Art.#	Emb. / Quantity
14412	100 stk / pcs
14432	100 stk / pcs
14458	100 stk / pcs
14452	100 stk / pcs

(Forniklet messing)
(nickel plated brass)**B1 Bajonet / Pin type**

Art.nr. / Art.#	Emb. / Quantity
12852	100 stk / pcs
12862	100 stk / pcs

**El. galvaniseret /
Zink plated****A1 / K1 (Lige / Straight)
DIN 3402**

Gevind / Thread	Art.nr. / Art.#	Emb. / Quantity
M6 x 1,0	17512	100 stk / pcs
M8 x 1,0	17532	100 stk / pcs
1/8"R / BSP	17552	100 stk / pcs
1/4"R / BSP	17562	100 stk / pcs

**A2 / K2 (45°)
DIN 3402**

Art.nr. / Art.#	Emb. / Quantity
17612	100 stk / pcs
17652	100 stk / pcs
17662	100 stk / pcs

**A3 / K3 (90°)
DIN 3402**

Art.nr. / Art.#	Emb. / Quantity
17712	100 stk / pcs
17752	100 stk / pcs
17762	100 stk / pcs


**Rustfri (V2A) /
Stainless (V2A)**
Gevind / Thread
M5 x 0,8
M6 x 0,75
M6 x 1,0
M8 x 1,0
M8 x 1,25
M10 x 1,0
M10 x 1,5
M12 x 1,5
5mm glat tap / drive fit
6mm glat tap / drive fit
8mm glat tap / drive fit
1/8"R / BSP
1/8"NPT
1/4"R / BSP
1/4"NPT
1/4"Whitw
1/4"SAE
**H1 (Lige / Straight)
DIN 71412, Form A**
Art.nr. / Art.#
Emb. / Quantity
18105
100 stk / pcs
18108
100 stk / pcs
18112
100 stk / pcs
18132
100 stk / pcs
18134
100 stk / pcs
18158
100 stk / pcs
18160
100 stk / pcs
18168
100 stk / pcs
18175
100 stk / pcs
18176
100 stk / pcs
18178
100 stk / pcs
18152
100 stk / pcs
18156
100 stk / pcs
18162
100 stk / pcs
18165
100 stk / pcs
18118
100 stk / pcs
18120
100 stk / pcs
**H2 (45°)
DIN 71412, Form B**
Art.nr. / Art.#
Emb. / Quantity
18205
100 stk / pcs
18212
100 stk / pcs
18232
100 stk / pcs
18234
100 stk / pcs
18258
100 stk / pcs
18260
100 stk / pcs
18252
100 stk / pcs
18262
50 stk / pcs
18218
50 stk / pcs
18220
50 stk / pcs
**H3 (90°)
DIN 71412, Form C**
Art.nr. / Art.#
Emb. / Quantity
18305
100 stk / pcs
18312
100 stk / pcs
18332
100 stk / pcs
18334
100 stk / pcs
18358
100 stk / pcs
18360
100 stk / pcs
18352
100 stk / pcs
18362
50 stk / pcs
18365
50 stk / pcs
18318
50 stk / pcs

**Rustfri (V2A) /
Stainless (V2A)**
Gevind / Thread
M6 x 1,0
M8 x 1,0
M8 x 1,25
M10 x 1,0
M10 x 1,5
M12 x 1,5
5mm glat tap / drive fit
6mm glat tap / drive fit
8mm glat tap / drive fit
1/8"R / BSP
1/4"R / BSP
3/8"R / BSP
**B1 / D1 (Lige / Straight)
DIN 3405**
Art.nr. / Art.#
Emb. / Quantity
18412
100 stk / pcs
18458
100 stk / pcs
18475
100 stk / pcs
18476
100 stk / pcs
18478
100 stk / pcs
18452
100 stk / pcs
18462
100 stk / pcs
**M1 (Lige / Straight)
DIN 3404, ø16mm**
Art.nr. / Art.#
Emb. / Quantity
18612
50 stk / pcs
18632
50 stk / pcs
18634
50 stk / pcs
18658
50 stk / pcs
18660
50 stk / pcs
18668
50 stk / pcs
18652
50 stk / pcs
18662
50 stk / pcs
18682
25 stk / pcs
B1 Bajonet / Pin type
Art.nr. / Art.#
Emb. / Quantity
18852
50 stk / pcs

**Syrefast (V4A) /
Acid proof (V4A)**
Gevind / Thread
M6 x 1,0
M8 x 1,0
M10 x 1,0
M10 x 1,5
1/8"R / BSP
1/4"R / BSP
**H1 (Lige / Straight)
DIN 71412, Form A**
Art.nr. / Art.#
Emb. / Quantity
13112
100 stk / pcs
13132
100 stk / pcs
13158
100 stk / pcs
13152
100 stk / pcs
13162
100 stk / pcs
**H2 (45°)
DIN 71412, Form B**
Art.nr. / Art.#
Emb. / Quantity
13212
100 stk / pcs
13232
100 stk / pcs
13258
100 stk / pcs
13252
100 stk / pcs
**H3 (90°)
DIN 71412, Form C**
Art.nr. / Art.#
Emb. / Quantity
13312
100 stk / pcs
13332
100 stk / pcs
13358
100 stk / pcs
13352
100 stk / pcs
**M1 (Lige / Straight)
DIN 3404 - ø16 mm**
Art.nr. / Art.#
Emb. / Quantity
13658
50 stk / pcs
13660
50 stk / pcs
13652
50 stk / pcs
13662
50 stk / pcs



Messing / Brass

H1 (Lige / Straight)
DIN 71412, Form A

<i>Gevind / Thread</i>	<i>Art.nr. / Art.#</i>	<i>Emb. / Quantity</i>
M6 x 1,0	19112	100 stk / pcs
M8 x 1,0	19132	100 stk / pcs
M8 x 1,25	19134	100 stk / pcs
M10 x 1,0	19158	100 stk / pcs
M10 x 1,5	19160	100 stk / pcs
1/8"R / BSP	19152	100 stk / pcs
1/4"SAE	19120	100 stk / pcs


H2 (45°)
DIN 71412, Form B

<i>Art.nr. / Art.#</i>	<i>Emb. / Quantity</i>
19212	100 stk / pcs
19234	100 stk / pcs
19258	100 stk / pcs
19252	100 stk / pcs


H3 (90°)
DIN 71412, Form C

<i>Art.nr. / Art.#</i>	<i>Emb. / Quantity</i>
19312	100 stk / pcs
19358	100 stk / pcs
19352	100 stk / pcs



Messing / Brass

B1 / D1
DIN 3405

<i>Gevind / Thread</i>	<i>Art.nr. / Art.#</i>	<i>Emb. / Quantity</i>
M6 x 1,0	19412	100 stk / pcs
M8 x 1,0	19432	100 stk / pcs
M8 x 1,25	19434	100 stk / pcs
M10 x 1,0	19458	100 stk / pcs
M10 x 1,5		
M12 x 1,5		
M12 x 1,75		
6mm glat tap / drive fit	19476	100 stk / pcs
8mm glat tap / drive fit	19478	100 stk / pcs
10mm glat tap / drive fit	19480	100 stk / pcs
1/8"R / BSP	19452	100 stk / pcs
1/4"R / BSP	19462	100 stk / pcs



(Seks-kantet hoved)
(Hexagonal head)

T1
DIN 3404, Sekskant / Hexagonal

<i>Art.nr. / Art.#</i>	<i>Emb. / Quantity</i>
19512	50 stk / pcs
19534	50 stk / pcs
19558	50 stk / pcs
19552	50 stk / pcs
19562	50 stk / pcs


M1
DIN 3405, ø16mm

<i>Art.nr. / Art.#</i>	<i>Emb. / Quantity</i>
19612	50 stk / pcs
19632	50 stk / pcs
19634	50 stk / pcs
19658	50 stk / pcs
19660	50 stk / pcs
19668	50 stk / pcs
19672	50 stk / pcs
19652	50 stk / pcs
19662	50 stk / pcs

Tryksmørenipler i sortimentsboks 120 stk

120 stk. tryksmørenipler af El. galvaniseret stål
fordelt på 12 rum.

Indeholder H1, H2 og H3 med gevind typerne:

H1:	H2:	H3:
30 stk M6x1.0	5 stk M6x1.0	5 stk M6x1.0
20 stk M8x1.0	5 stk M8x1.0	5 stk M8x1.0
15 stk M10x1.0	5 stk M10x1.0	5 stk M10x1.0
15 stk 1/8"R	5 stk 1/8"R	5 stk 1/8"R

Art.nr. Emb.
12500 1

Hydraulic grease nipples 120 pcs.

120 pcs. grease nipples in zink plated
packed in 12 room box.

Contains H1, H2 og H3 in following threads:

H1:	H2:	H3:
30 pcs M6x1.0	5 pcs M6x1.0	5 pcs M6x1.0
20 pcs M8x1.0	5 pcs M8x1.0	5 pcs M8x1.0
15 pcs M10x1.0	5 pcs M10x1.0	5 pcs M10x1.0
15 pcs 1/8"BSP	5 pcs 1/8"BSP	5 pcs 1/8"BSP

Art.# Quantity
12500 1

**Tryksmørenipler i sortimentsboks 240 stk**

240 stk. tryksmørenipler af El. galvaniseret stål
fordelt på 18 rum.

Indeholder H1, H2 og H3 med gevind typerne:

H1:	H2:	H3:
20 stk M6x1.0	10 stk M6x1.0	10 stk M6x1.0
20 stk M8x1.25	10 stk M8x1.25	10 stk M8x1.25
20 stk M10x1.5	10 stk M10x1.5	10 stk M10x1.5
20 stk 1/8"R	10 stk 1/8"R	10 stk 1/8"R
10 stk 1/4"R	5 stk 1/4"R	5 stk 1/4"R
20 stk 1/4"SAE	20 stk 1/4"WW	20 stk 1/4"BSF

Art.nr. Emb.
12521 1


Hydraulic grease nipples 240 pcs.

240 pcs. grease nipples in zink plated
packed in 18 room box.

Contains H1, H2 og H3 in following threads:

H1:	H2:	H3:
20 pcs M6x1.0	10 pcs M6x1.0	10 pcs M6x1.0
20 pcs M8x1.25	10 pcs M8x1.25	10 pcs M8x1.25
20 pcs M10x1.5	10 pcs M10x1.5	10 pcs M10x1.5
20 pcs 1/8"BSP	10 pcs 1/8"BSP	10 pcs 1/8"BSP
10 pcs 1/4"BSP	5 pcs 1/4"BSP	5 pcs 1/4"BSP
20 pcs 1/4"SAE	20 pcs 1/4"WW	20 pcs 1/4"BSF

Art.# Quantity
12521 1

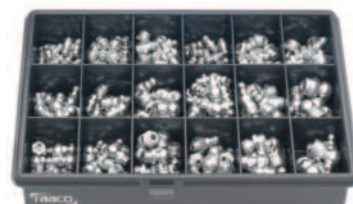**Rustfri tryksmørenipler i sortimentsboks 120 stk**

120 stk. tryksmørenipler af rustfri (V2A) stål
fordelt på 12 rum.

Indeholder H1, H2 og H3 med gevind typerne:

H1:	H2:	H3:
25 stk M6x1.0	5 stk M6x1.0	5 stk M6x1.0
25 stk M8x1.0	5 stk M8x1.0	5 stk M8x1.0
15 stk M10x1.0	5 stk M10x1.0	5 stk M10x1.0
15 stk 1/8"R	5 stk 1/8"R	5 stk 1/8"R

Art.nr. Emb.
12504 1

Stainless hydraulic grease nipples 120 pcs.

120 pcs. grease nipples in stainless steel (V2A)
packed in 12 room box.

Contains H1, H2 og H3 in following threads:

H1:	H2:	H3:
25 pcs M6x1.0	5 pcs M6x1.0	5 pcs M6x1.0
25 pcs M8x1.0	5 pcs M8x1.0	5 pcs M8x1.0
15 pcs M10x1.0	5 pcs M10x1.0	5 pcs M10x1.0
15 pcs 1/8"BSP	5 pcs 1/8"BSP	5 pcs 1/8"BSP

Art.# Quantity
12504 1

**Rustfri tryksmørenipler i sortimentsboks 120 stk**

120 stk. tryksmørenipler af rustfri (V2A) stål
fordelt på 18 rum.

Indeholder H1, H2 og H3 med gevind typerne:

H1:	H2:	H3:
10 stk M6x1.0	10 stk M6x1.0	10 stk M6x1.0
10 stk M8x1.0	10 stk M8x1.0	10 stk M8x1.0
10 stk 1/8"R	10 stk 1/8"R	10 stk 1/8"R
10 stk 1/4"R	10 stk 1/4"R	10 stk 1/4"R

Art.nr. Emb.
12540 1

Stainless hydraulic grease nipples 120 pcs.

120 pcs. grease nipples in stainless steel (V2A)
packed in 18 room box.

Contains H1, H2 og H3 in following threads:

H1:	H2:	H3:
10 pcs M6x1.0	10 pcs M6x1.0	10 pcs M6x1.0
10 pcs M8x1.0	10 pcs M8x1.0	10 pcs M8x1.0
10 pcs 1/8"BSP	10 pcs 1/8"BSP	10 pcs 1/8"BSP
10 pcs 1/4"BSP	10 pcs 1/4"BSP	10 pcs 1/4"BSP

Art.# Quantity
12540 1



Beskyttelseshætter for H smørenipler

250 stk. pakninger.

Art.nr.		Emb.
12515	Rød med strop	1 pose med 250 stk.
12517	Gul med strop	1 pose med 250 stk.

Protection caps for type H hydraulic grease nipples

250 pcs. packages.

Art.#		Quantity
12515	Red with strap	250 pcs. in bag
12517	Yellow with strap	250 pcs. in bag

**KABI Reparations værktøj**

For skift af defekte smørenipler og for reparation af gevind. Er både til lige og vinklede smørenipler.

Art.nr.	Nøglevidde	Emb.
36100	9	1
36200	11	1

KABI Easy Out Tool

For removing worn out & broken grease fittings as well as retapping holes for installing new grease fittings. Works with both straight and angled fittings.

Art.#	Hex Size	Quantity
36100	9	1
36200	11	1

**KABI Udblokker sæt**

Til at løse størket fedt i smørenipler.

Art.nr.	Emb.
36300	1

KABI Grease Fitting Unblocker

Opens clogged grease fittings and loosens hardened grease joints.

Art.#	Quantity
36300	1

**Islåningsværktøj**

For smørenipler med glat tap.

Art.nr.	Emb.
12000	1

"Drive fit" Grease fitting installer

For nipples with drive fit.

Art.#	Quantity
12000	1

**KABI Gevindmåler**

Dimension: 75mm x 207mm.

Metrisk fra M6 til M10.
 NPT fra 1/8" til 3/8".
 Rør 1/8" til 1/4".
 SAE/UNF 1/4" til 3/8".
 BSW 1/4" til 3/8".
 BSF 3/16" til 5/16".

Art.nr.	Emb.
36000	1

KABI Grease Fitting Thread Tester

Size: 75mm x 207mm.

Metric from M6 to M10.
 NPT from 1/8" to 3/8".
 BSPT 1/8" to 1/4".
 SAE/UNF 1/4" to 3/8".
 BSW 1/4" to 3/8".
 BSF 3/16" to 5/16".

Art.#	Quantity
36000	1

**ABNOX Højtryksventiler**

Højtryksteknologi på det mindste rum med den bedste tæthed. ABNOX højtryksventil med perfekt justeret hermetisk tætning takket være integreret O-ring (indskæring) i rammen. Til installation i klemmesystemer og skæreværktøjer.

Tilslutning: M10 x 1,0 (kan skaffes i 1/8"R & 1/8"NPT).
 Tilspændingmoment: 20% - 10 Nm.
 Drifttryk: 700 bar.
 Max. tryk: 1000 bar.

Art.nr.	Type / Type	Gevind / Thread
32319	Indløbsventil / Inlet valve	M10 x 1,0
32320	Udløbsventil / Release valve	M10 x 1,0

ABNOX High pressure valves

High pressure technology on smallest room with best tightness. ABNOX high pressure valve with perfectly aligned hermetic sealing, thanks to integrated O-ring (cut-in) in the frame for the installation in clamp systems and cutting tools.

Connection: M10 x 1.0 (available with 1/8"BSP & 1/8"NPT). Wrench torque: 20% - 10 Nm.
 Operating pressure: 700 bar.
 Max. pressure: 1000 bar.

Standard / Standard	Emb. / Quantity
DIN 71412	100
	100



Kan desuden leveres i specielle udførelser med alternative nøglevidder, gevindlængder m.m. / We also deliver in alternative wrench sizes, thread lengths and more.

Oliepumper
Olieanlæg
Væskepumper
Olieskimmere
Refraktometre
Oliestandsglas

Oil pumps
Oil systems
Fluid pumps
Oil skimmers
Refractometers
Oil level indicators



Trykluftdrevne membranpumper Air driven diaphragm pumps	73
Trykluftdrevne oliepumper – Olieanlæg – Tilbehør Pneumatic oil pumps – Oil systems – Accessories	74
Væskepumper – Adaptorer Fluid pumps – Adapters	92
Elektriske fad og beholderpumper Electrical pumps for drums	98
Oliestandsglas og visere – Oliedosering – Reservoir – Tilbehør Oil level windows and indicators – Drop dosing of oil – Reservoir – Accessories	99
Olieskimmere – Doseringspumper – Refraktometre Oil skimmers – Piston mixers – Refractometers	104
Ariana Cool-line system i 1/4", 3/8", 1/2", 3/4" – Tilbehør Ariana Cool-line system in 1/4", 3/8", 1/2", 3/4" – Accessories	107

Luftdrevne dobbeltvirkende membranpumper er designet til at håndtere en bred vifte af væsker med højt tørstofindhold og mindre partikler. Pumperne indeholder ingen lameller, stempler eller gear.

Pumperne kan overføre forurenede medier og er ideelle til tømning af kar eller væsker, som kan være en blanding af flere produkter såsom olie, vand og frostvæske blandet sammen.

Den minimale kontakt med væsken gør disse pumper til et glimrende valg for forskydningsfølsomme væsker. De tåler også tørkørsel i kortere perioder. Pumperne er selvansugende. En indbygget kontraventil giver mulighed for stor sugehøjde, selv ved tør opstart og tungere væsker. Pumperne tåler nedsænkning i væsken. For blot udløbsslangen op over væskenniveauet.

Alle pumpe modellerne er designet til brug med et indgangstryk på 1,5 - 7 bar (20 - 100 PSI). Lufttilslutning på alle pumpe modellerne er 1/4"R (indv.).

KABI Membranpumper fås med 2 typer pumpehuse og membraner:

Aluminium: Med Hytrel® membran. Bedst til brug med almindelige væsker som olier, diesel, glykol mm. Anbefales ikke til brug med slibende og ætsende væsker.

Polypropylen: Med Teflon® (PTFE) membran. Velegnet til aggressive kemiske applikationer såsom opløsningsmidler. Anbefales ikke til brug sammen med petroleum baserede medier.

Spørg altid efter kundeservice, for rette pumpevalg.

Air operated double diaphragm pumps are designed for handling of a wide variety of fluids with high solids content. These pumps have no rotors, pistons or gears.

The pumps can transfer contaminated media and are good at cleaning out pits or liquids that can be a mix of several products like oil, water and anti-freeze all mixed together.

The minimal parts contact with the liquid makes these pumps an excellent choice for shear sensitive fluids. They can run dry without damage for shorter periods. The pumps are self priming. An incorporating internal check valve allows for high suction lift even at dry start-up and with heavier fluids. These pumps can be submerged in the liquid by simply running the exhaust line above the liquid level.

All pump models are designed for use with an inlet air pressure of 1.5 - 7 bar (20 - 100 PSI). Air inlet on all pump models is threaded 1/4" BSP (F).

KABI Diaphragm pumps are available in 2 types of body materials:

Aluminium: With Hytrel® diaphragm. Highly suitable for use with oils. Not recommended for use with abrasive and corrosive liquids.

Polypropylene: With Teflon® (PTFE) diaphragm. Suitable for use with highly aggressive liquids such as solvents etc. Not recommended for use with petroleum-based media.

Call KABI customer service. We will help you find the right pump.

KABI Membranpumper med aluminiumshus


Membran i Hytrel.

Art.nr.	Gevind	Max. kapacitet	Løftehøjde	Emb.
60801	1/2"	50 l/min.	1,5 mtr.	1
60802	3/4"	110 l/min.	5,5 mtr.	1
60803	1"	110 l/min.	5,5 mtr.	1

KABI Diaphragm pumps with aluminium body

Hytrel diaphragm.

Art.#	Thread	Max. flow	Suction lift	Quantity
60801	1/2"	50 l/min.	1.5 mtr.	1
60802	3/4"	110 l/min.	5.5 mtr.	1
60803	1"	110 l/min.	5.5 mtr.	1

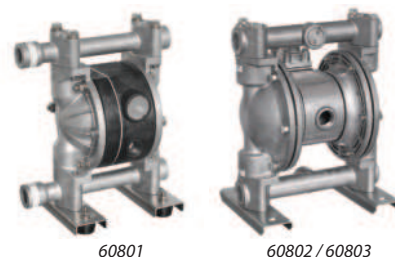

60801

60802 / 60803

KABI Membranpumper med polypropylen hus


Membran i Teflon (PTFE).

Art.nr.	Gevind	Max. kapacitet	Løftehøjde	Emb.
60810	1/4"	11 l/min.	1,5 mtr.	1
60811	1/2"	45 l/min.	2,5 mtr.	1

KABI Diaphragm pumps, polypropylene body

Teflon (PTFE) diaphragm.

Art.#	Thread	Max. flow	Suction lift	Quantity
60810	1/4"	11 l/min.	1.5 mtr.	1
60811	1/2"	45 l/min.	2.5 mtr.	1

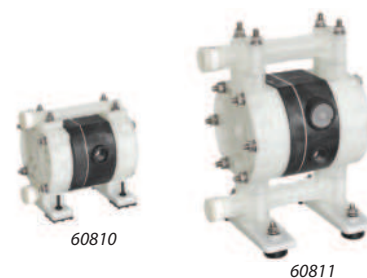

60810

60811

KABI Tømningskit for membranpumpe


Bestående af: Vægbeslag for membranpumpe. Luftregulator med manometer og vandudskillers. 2,4 mtr. udløbsslange. 2,4 mtr. sugeslange monteret med Y-filter og CAM koblingssæt.

Art.nr.	Kit som passer til	Emb.
60851	1/2" Membranpumpe	1
60853	1" Membranpumpe	1

KABI Evacuation kit for diaphragm pump

Kit containing: Wall bracket. Filter regulator with water separator. 2.4 mtr. outlet hose. 2.4 mtr. inlet hose with Y-strainer and CAM lock coupler.

Art.#	Kit suitable for	Quantity
60851	1/2" Diaphragm pump	1
60853	1" Diaphragm pump	1

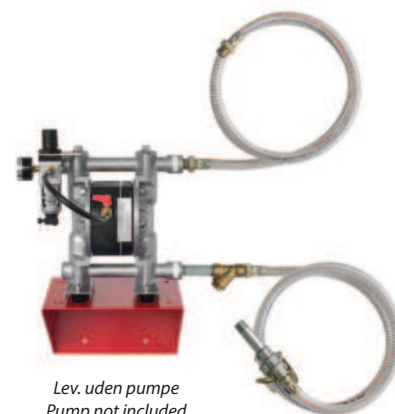

Lev. uden pumpe
Pump not included

KABI Trykluftdreven oliepumpe 3:1

For smørelie el. lign. op til SAE 130 i rørsystem.
Kapacitet: 14,0 ltr./min. baseret på fri gennemstrømning ved 6 bar.

Lufttilslutning: 1/4"R.

Olietilslutning, udløb: 1/2"R.

Min/Max. arbejdsdruk: 2-10 bar.

Luftforbrug: 230 ltr./min.

Støjniveau: 81 db.

Med 2"R fadforskrining.

Art.nr.	Pumperørslængde	Emb.
60263	ø42mm x 950mm (208 ltr.)	1

NB: Pumpen skal forsynes med tågesmøring (FRL unit) 60286.

KABI Pneumatic oil pump 3:1

For lubricating oil up to SAE 130 in pipe system.

Capacity: 14.0 ltr./min. based on a free flow at 6 bar.

Air connection: 1/4"BSP.

Oil connection, outlet: 1/2"BSP.

Min/Max. working pressure: 2-10 bar.

Air consumption: 230 ltr./min.

Noise level: 81 db.

With 2"BSP cask screw.

Art.#	Pump tube length	Quantity
60263	ø42mm x 950mm (208 ltr.)	1

Note: The pump must be supplied with mist lubrication (FRL unit) 60286.

**KABI Trykluftdreven oliepumpe 3:1**

For smørelie el. lign. op til SAE 130 i rørsystem.
Kapacitet: 14,0 ltr./min. baseret på fri gennemstrømning ved 6 bar.

Lufttilslutning: 1/4"R.

Olietilslutning, indgang: 1"R.

Olietilslutning, udløb: 1/2"R.

Min/Max. arbejdsdruk: 2-10 bar.

Luftforbrug: 230 ltr./min.

Støjniveau: 81 db.

Med 2"R fadforskrining.

Art.nr.		Emb.
60267	Pumpe - kort model, ø42	1
40250	Sugerør for 208 ltr. tromle	1
40251	Vægbeslag for kort pumpe	1

NB: Pumpen skal forsynes med tågesmøring (FRL unit) 60286.

KABI Pneumatic oil pump 3:1

For lubricating oil up to SAE 130 in pipe system.

Capacity: 14.0 ltr./min. based on a free flow at 6 bar.

Air connection: 1/4"BSP.

Oil connection, input: 1"BSP.

Oil connection, outlet: 1/2"BSP.

Min/Max. working pressure: 2-10 bar.

Air consumption: 230 ltr./min.

Noise level: 81 db.

With 2"BSP cask screw.

Art.#		Quantity
60267	Pump - short model, ø42	1
40250	Suction tube for 208 ltr. drum	1
40251	Wall bracket for short pump	1

Note: The pump must be supplied with mist lubrication (FRL unit) 60286.

**Eurolube trykluftdrevne oliepumper 1:1 og 3:1**

For smørelie op til SAE 90 i rørsystem.

For 180-205 ltr. tromler.

Lufttilslutning: 1/4"R.

Olieudløb: 3/4"R.

Med 2" fadforskrining.

Max. 10 bar. Arbejdsdruk 8 bar.

Kapaciteten er baseret på fri gennemstrømning.

Art.nr.		Tromle
40261	1:1 max. 40 ltr./min (ø50 x 930mm)	208 ltr.
40263	3:1 max. 25 ltr./min (ø32 x 915mm)	208 ltr.
40255	3:1 max. 25 ltr./min (ø32 x 770mm)	60 ltr.

Eurolube Pneumatic oil pumps 1:1 and 3:1

For lubricating oil up to SAE 90 in pipe system.

For 180-205 ltr. drums.

Air connection: 1/4"BSP.

Oil connection: 3/4"BSP.

With 2" bung.

Max. 10 bar. Working pressure 8 bar.

The capacity is based on free flow.

Art.#		Drum
40261	1:1 max. 40 ltr./min (ø50 x 930mm)	208 ltr.
40263	3:1 max. 25 ltr./min (ø32 x 915mm)	208 ltr.
40255	3:1 max. 25 ltr./min (ø32 x 770mm)	60 ltr.

**Trykluftdrevet pumpesæt kort model 3:1**

Lufttilslutning: 1/4"R.

Olietilslutning: 3/4"R.

Inkl. vægbeslag, sugerør 1040mm,

udløbsslange 2,5 m, tilslutning til pumpe 1"R.

Kapaciteten er baseret på fri gennemstrømning.

Art.nr.	
40266	Max. 25 ltr./min (ø32 x 180mm)
40267	Pumpe uden tilbehør

Pneumatic driven pump kit stub pump 3:1

Air connection: 1/4"BSP.

Oil Connection: 3/4"BSP.

Includes wall mount, suction tube 1040mm,

outlet hose 2.5m, connection to pump 1"BSP.

The capacity is based on free flow.

Art.#	
40266	Max. 25 ltr./min (ø32 x 180mm)
40267	Pump without accessories



KABI Olieanlæg med slangerulle 10 mtr. Åben

KABI trykluftdrevet oliepumpe 3:1, 200 ltr. (60263).
Åben slangerulle inkl. dreje/vippe montagebeslag.
Oliepåfyldningspistol med drypventil (40400).
Drypbakke for påfyldningspistol (60699).

Slangerulle: 10 mtr. x 1/2".
Max. tryk slangerulle: 138 bar.
Max. tryk oliepistol: 60 bar.
Max. tryk pumpe: 10 bar.
Tilslutningsslange: 800 mm.

Art.nr.	Emb.
60550	1

KABI Oil system with hose reel 10 mtr. Open

KABI air operated oil pump 3:1, 200 ltr. (60263).
Open hose reel incl. swivel mount bracket.
Oil control gun with drip valve (40400).
Drip tray for oil control gun (60699).

Hose reel: 10 mtr. x 1/2".
Max. pressure hose reel: 138 bar.
Max. pressure oil gun: 60 bar.
Max. pressure pump: 10 bar.
Connection hose: 800 mm.

Art.#	Quantity
60550	1


KABI Olieanlæg med slangerulle 10 mtr. Åben

KABI trykluftdrevet oliepumpe 3:1, 200 ltr. (60263).
Åben slangerulle inkl. dreje/vippe montagebeslag.
Oliepåfyldningspistol med slange og drypventil (40394).
Drypbakke for påfyldningspistol (60699).

Slangerulle: 10 mtr. x 1/2".
Max. tryk slangerulle: 138 bar.
Max. tryk oliepistol: 60 bar.
Max. tryk pumpe: 10 bar.
Tilslutningsslange: 800 mm.

Art.nr.	Emb.
60551	1

KABI Oil system with hose reel 10 mtr. Open

KABI air operated oil pump 3:1, 200 ltr. (60263).
Open hose reel incl. swivel mount bracket.
Oil control gun with hose and drip valve (40394).
Drip tray for oil control gun (60699).

Hose reel: 10 mtr. x 1/2".
Max. pressure hose reel: 138 bar.
Max. pressure oil gun: 60 bar.
Max. pressure pump: 10 bar.
Connection hose: 800 mm.

Art.#	Quantity
60551	1


KABI Olieanlæg med slangerulle 10 mtr. Åben

KABI trykluftdrevet oliepumpe 3:1, 200 ltr. (60263).
Åben slangerulle inkl. dreje/vippe montagebeslag.
Oliepåfyldningspistol, digital forudindstillelig (40380).
Drypbakke for påfyldningspistol (60699).

Slangerulle: 10 mtr. x 1/2".
Max. tryk slangerulle: 138 bar.
Max. tryk oliepistol: 70 bar.
Max. tryk pumpe: 10 bar.
Tilslutningsslange: 800 mm.

Art.nr.	Emb.
60552	1

KABI Oil system with hose reel 10 mtr. Open

KABI air operated oil pump 3:1, 200 ltr. (60263).
Open hose reel incl. swivel mount bracket.
Oil control gun, digital preset (40380).
Drip tray for oil control gun (60699).

Hose reel: 10 mtr. x 1/2".
Max. pressure hose reel: 138 bar.
Max. pressure oil gun: 70 bar.
Max. pressure pump: 10 bar.
Connection hose: 800 mm.

Art.#	Quantity
60552	1


KABI Olieanlæg med slangerulle 10 mtr. Åben

KABI trykluftdrevet oliepumpe 3:1, 200 ltr. (60263).
Åben slangerulle inkl. dreje/vippe montagebeslag.
Oliepåfyldningspistol, digital tæller (40385).
Drypbakke for påfyldningspistol (60699).

Slangerulle: 10 mtr. x 1/2".
Max. tryk slangerulle: 138 bar.
Max. tryk oliepistol: 70 bar.
Max. tryk pumpe: 10 bar.
Tilslutningsslange: 800 mm.

Art.nr.	Emb.
60553	1

KABI Oil system with hose reel 10 mtr. Open

KABI air operated oil pump 3:1, 200 ltr. (60263).
Open hose reel incl. swivel mount bracket.
Oil control gun, digital counter (40385).
Drip tray for oil control gun (60699).

Hose reel: 10 mtr. x 1/2".
Max. pressure hose reel: 138 bar.
Max. pressure oil gun: 70 bar.
Max. pressure pump: 10 bar.
Connection hose: 800 mm.

Art.#	Quantity
60553	1



KABI Olieanlæg med slangerulle 10 mtr. Åben

KABI trykluftdrevet oliepumpe 3:1, kort udgave (60267). Sugerør og slange for 200 ltr. tromle. Åben slangerulle inkl. dreje/vippe montagebeslag. Oliepåfyldningspistol med drypventil (40400). Drypbakke for påfyldningspistol (60699).

Slangerulle: 10 mtr. x 1/2".
Max. tryk slangerulle: 138 bar.
Max. tryk oliepistol: 60 bar.
Max. tryk pumpe: 10 bar.
Tilslutningsslange: 800 mm.

Art.nr.	Emb.
60750	1

KABI Oil system with hose reel 10 mtr. Open

KABI air operated oil pump 3:1, short edition (60267). Suction tube and hose for 200 ltr. drum. Open hose reel incl. swivel mount bracket. Oil control gun with drip valve (40400). Drip tray for oil control gun (60699).

Hose reel: 10 mtr. x 1/2".
Max. pressure hose reel: 138 bar.
Max. pressure oil gun: 60 bar.
Max. pressure pump: 10 bar.
Connection hose: 800 mm.

Art.#	Quantity
60750	1

**KABI Olieanlæg med slangerulle 10 mtr. Åben**

KABI trykluftdrevet oliepumpe 3:1, kort udgave (60267). Sugerør og slange for 200 ltr. tromle. Åben slangerulle inkl. dreje/vippe montagebeslag. Oliepåfyldningspistol med slange og drypventil (40394). Drypbakke for påfyldningspistol (60699).

Slangerulle: 10 mtr. x 1/2".
Max. tryk slangerulle: 138 bar.
Max. tryk oliepistol: 60 bar.
Max. tryk pumpe: 10 bar.
Tilslutningsslange: 800 mm.

Art.nr.	Emb.
60751	1

KABI Oil system with hose reel 10 mtr. Open

KABI air operated oil pump 3:1, short edition (60267). Suction tube and hose for 200 ltr. drum. Open hose reel incl. swivel mount bracket. Oil control gun with hose and drip valve (40394). Drip tray for oil control gun (60699).

Hose reel: 10 mtr. x 1/2".
Max. pressure hose reel: 138 bar.
Max. pressure oil gun: 60 bar.
Max. pressure pump: 10 bar.
Connection hose: 800 mm.

Art.#	Quantity
60751	1

**KABI Olieanlæg med slangerulle 10 mtr. Åben**

KABI trykluftdrevet oliepumpe 3:1, kort udgave (60267). Sugerør og slange for 200 ltr. tromle. Åben slangerulle inkl. dreje/vippe montagebeslag. Oliepåfyldningspistol, digital forudindstillelig (40380). Drypbakke for påfyldningspistol (60699).

Slangerulle: 10 mtr. x 1/2".
Max. tryk slangerulle: 138 bar.
Max. tryk oliepistol: 70 bar.
Max. tryk pumpe: 10 bar.
Tilslutningsslange: 800 mm.

Art.nr.	Emb.
60752	1

KABI Oil system with hose reel 10 mtr. Open

KABI air operated oil pump 3:1, short edition (60267). Suction tube and hose for 200 ltr. drum. Open hose reel incl. swivel mount bracket. Oil control gun, digital preset (40380). Drip tray for oil control gun (60699).

Hose reel: 10 mtr. x 1/2".
Max. pressure hose reel: 138 bar.
Max. pressure oil gun: 70 bar.
Max. pressure pump: 10 bar.
Connection hose: 800 mm.

Art.#	Quantity
60752	1

**KABI Olieanlæg med slangerulle 10 mtr. Åben**

KABI trykluftdrevet oliepumpe 3:1, kort udgave (60267). Sugerør og slange for 200 ltr. tromle. Åben slangerulle inkl. dreje/vippe montagebeslag. Oliepåfyldningspistol, digital tæller (40385). Drypbakke for påfyldningspistol (60699).

Slangerulle: 10 mtr. x 1/2".
Max. tryk slangerulle: 138 bar.
Max. tryk oliepistol: 70 bar.
Max. tryk pumpe: 10 bar.
Tilslutningsslange: 800 mm.

Art.nr.	Emb.
60753	1

KABI Oil system with hose reel 10 mtr. Open

KABI air operated oil pump 3:1, short edition (60267). Suction tube and hose for 200 ltr. drum. Open hose reel incl. swivel mount bracket. Oil control gun, digital counter (40385). Drip tray for oil control gun (60699).

Hose reel: 10 mtr. x 1/2".
Max. pressure hose reel: 138 bar.
Max. pressure oil gun: 70 bar.
Max. pressure pump: 10 bar.
Connection hose: 800 mm.

Art.#	Quantity
60753	1



KABI Olieanlæg med slangerulle 10 mtr. Lukket

KABI trykluftdrevet oliepumpe 3:1, 200 ltr. (60263).
Lukket slangerulle inkl. dreje/vippe montagebeslag.
Oliepåfyldningspistol med drypventil (40400).
Drypbakke for påfyldningspistol (60699).

Slangerulle: 10 mtr. x 1/2".
Max. tryk slangerulle: 138 bar.
Max. tryk oliepistol: 60 bar.
Max. tryk pumpe: 10 bar.
Tilslutningsslange: 800 mm.

Art.nr. Emb.
60558 1

KABI Oil system with hose reel 10 mtr. Closed

KABI air operated oil pump 3:1, 200 ltr. (60263).
Closed hose reel incl. swivel mount bracket.
Oil control gun with drip valve (40400).
Drip tray for oil control gun (60699).

Hose reel: 10 mtr. x 1/2".
Max. pressure hose reel: 138 bar.
Max. pressure oil gun: 60 bar.
Max. pressure pump: 10 bar.
Connection hose: 800 mm.

Art.# Quantity
60558 1


KABI Olieanlæg med slangerulle 10 mtr. Lukket

KABI trykluftdrevet oliepumpe 3:1, 200 ltr. (60263).
Lukket slangerulle inkl. dreje/vippe montagebeslag.
Oliepåfyldningspistol med slange og drypventil (40394).
Drypbakke for påfyldningspistol (60699).

Slangerulle: 10 mtr. x 1/2".
Max. tryk slangerulle: 138 bar.
Max. tryk oliepistol: 60 bar.
Max. tryk pumpe: 10 bar.
Tilslutningsslange: 800 mm.

Art.nr. Emb.
60559 1

KABI Oil system with hose reel 10 mtr. Closed

KABI air operated oil pump 3:1, 200 ltr. (60263).
Closed hose reel incl. swivel mount bracket.
Oil control gun with hose and drip valve (40394).
Drip tray for oil control gun (60699).

Hose reel: 10 mtr. x 1/2".
Max. pressure hose reel: 138 bar.
Max. pressure oil gun: 60 bar.
Max. pressure pump: 10 bar.
Connection hose: 800 mm.

Art.# Quantity
60559 1


KABI Olieanlæg med slangerulle 10 mtr. Lukket

KABI trykluftdrevet oliepumpe 3:1, 200 ltr. (60263).
Lukket slangerulle inkl. dreje/vippe montagebeslag.
Oliepåfyldningspistol, digital forudindstillelig (40380).
Drypbakke for påfyldningspistol (60699).

Slangerulle: 10 mtr. x 1/2".
Max. tryk slangerulle: 138 bar.
Max. tryk oliepistol: 70 bar.
Max. tryk pumpe: 10 bar.
Tilslutningsslange: 800 mm.

Art.nr. Emb.
60560 1

KABI Oil system with hose reel 10 mtr. Closed

KABI air operated oil pump 3:1, 200 ltr. (60263).
Closed hose reel incl. swivel mount bracket.
Oil control gun, digital preset (40380).
Drip tray for oil control gun (60699).

Hose reel: 10 mtr. x 1/2".
Max. pressure hose reel: 138 bar.
Max. pressure oil gun: 70 bar.
Max. pressure pump: 10 bar.
Connection hose: 800 mm.

Art.# Quantity
60560 1


KABI Olieanlæg med slangerulle 10 mtr. Lukket

KABI trykluftdrevet oliepumpe 3:1, 200 ltr. (60263).
Lukket slangerulle inkl. dreje/vippe montagebeslag.
Oliepåfyldningspistol, digital tæller (40385).
Drypbakke for påfyldningspistol (60699).

Slangerulle: 10 mtr. x 1/2".
Max. tryk slangerulle: 138 bar.
Max. tryk oliepistol: 70 bar.
Max. tryk pumpe: 10 bar.
Tilslutningsslange: 800 mm.

Art.nr. Emb.
60561 1

KABI Oil system with hose reel 10 mtr. Closed

KABI air operated oil pump 3:1, 200 ltr. (60263).
Closed hose reel incl. swivel mount bracket.
Oil control gun, digital counter (40385).
Drip tray for oil control gun (60699).

Hose reel: 10 mtr. x 1/2".
Max. pressure hose reel: 138 bar.
Max. pressure oil gun: 70 bar.
Max. pressure pump: 10 bar.
Connection hose: 800 mm.

Art.# Quantity
60561 1



KABI Olieanlæg med slangerulle 10 mtr. Lukket

KABI trykluftdrevet oliepumpe 3:1, kort udgave (60267). Sugerør og slange for 200 ltr. tromle. Lukket slangerulle inkl. dreje/vippe montagebeslag. Oliepåfyldningspistol med drypventil (40400). Drypbakke for påfyldningspistol (60699).

Slangerulle: 10 mtr. x 1/2".
Max. tryk slangerulle: 138 bar.
Max. tryk oliepistol: 60 bar.
Max. tryk pumpe: 10 bar.
Tilslutningsslange: 800 mm.

Art.nr. Emb.
60758 1

KABI Oil system with hose reel 10 mtr. Closed

KABI air operated oil pump 3:1, short edition (60267). Suction tube and hose for 200 ltr. drum. Closed hose reel incl. swivel mount bracket. Oil control gun with drip valve (40400). Drip tray for oil control gun (60699).

Hose reel: 10 mtr. x 1/2".
Max. pressure hose reel: 138 bar.
Max. pressure oil gun: 60 bar.
Max. pressure pump: 10 bar.
Connection hose: 800 mm.

Art.# Quantity
60758 1

**KABI Olieanlæg med slangerulle 10 mtr. Lukket**

KABI trykluftdrevet oliepumpe 3:1, kort udgave (60267). Sugerør og slange for 200 ltr. tromle. Lukket slangerulle inkl. dreje/vippe montagebeslag. Oliepåfyldningspistol med slange og drypventil (40394). Drypbakke for påfyldningspistol (60699).

Slangerulle: 10 mtr. x 1/2".
Max. tryk slangerulle: 138 bar.
Max. tryk oliepistol: 60 bar.
Max. tryk pumpe: 10 bar.
Tilslutningsslange: 800 mm.

Art.nr. Emb.
60759 1

KABI Oil system with hose reel 10 mtr. Closed

KABI air operated oil pump 3:1, short edition (60267). Suction tube and hose for 200 ltr. drum. Closed hose reel incl. swivel mount bracket. Oil control gun with hose and drip valve (40394). Drip tray for oil control gun (60699).

Hose reel: 10 mtr. x 1/2".
Max. pressure hose reel: 138 bar.
Max. pressure oil gun: 60 bar.
Max. pressure pump: 10 bar.
Connection hose: 800 mm.

Art.# Quantity
60759 1

**KABI Olieanlæg med slangerulle 10 mtr. Lukket**

KABI trykluftdrevet oliepumpe 3:1, kort udgave (60267). Sugerør og slange for 200 ltr. tromle. Lukket slangerulle inkl. dreje/vippe montagebeslag. Oliepåfyldningspistol, digital forudindstillelig (40380). Drypbakke for påfyldningspistol (60699).

Slangerulle: 10 mtr. x 1/2".
Max. tryk slangerulle: 138 bar.
Max. tryk oliepistol: 70 bar.
Max. tryk pumpe: 10 bar.
Tilslutningsslange: 800 mm.

Art.nr. Emb.
60760 1

KABI Oil system with hose reel 10 mtr. Closed

KABI air operated oil pump 3:1, short edition (60267). Suction tube and hose for 200 ltr. drum. Closed hose reel incl. swivel mount bracket. Oil control gun, digital preset (40380). Drip tray for oil control gun (60699).

Hose reel: 10 mtr. x 1/2".
Max. pressure hose reel: 138 bar.
Max. pressure oil gun: 70 bar.
Max. pressure pump: 10 bar.
Connection hose: 800 mm.

Art.# Quantity
60760 1

**KABI Olieanlæg med slangerulle 10 mtr. Lukket**

KABI trykluftdrevet oliepumpe 3:1, kort udgave (60267). Sugerør og slange for 200 ltr. tromle. Lukket slangerulle inkl. dreje/vippe montagebeslag. Oliepåfyldningspistol, digital tæller (40385). Drypbakke for påfyldningspistol (60699).

Slangerulle: 10 mtr. x 1/2".
Max. tryk slangerulle: 138 bar.
Max. tryk oliepistol: 70 bar.
Max. tryk pumpe: 10 bar.
Tilslutningsslange: 800 mm.

Art.nr. Emb.
60761 1

KABI Oil system with hose reel 10 mtr. Open

KABI air operated oil pump 3:1, short edition (60267). Suction tube and hose for 200 ltr. drum. Closed hose reel incl. swivel mount bracket. Oil control gun, digital counter (40385). Drip tray for oil control gun (60699).

Hose reel: 10 mtr. x 1/2".
Max. pressure hose reel: 138 bar.
Max. pressure oil gun: 70 bar.
Max. pressure pump: 10 bar.
Connection hose: 800 mm.

Art.# Quantity
60761 1



KABI Olieanlæg med slangerulle 15 mtr. Åben

KABI trykluftdrevet oliepumpe 3:1, 200 ltr. (60263).
Åben slangerulle inkl. dreje/vippe montagebeslag.
Oliepåfyldningspistol med drypventil (40400).
Drypbakke for påfyldningspistol (60699).

Slangerulle: 15 mtr. x 1/2".
Max. tryk slangerulle: 138 bar.
Max. tryk oliepistol: 60 bar.
Max. tryk pumpe: 10 bar.
Tilslutningsslange: 800 mm.

Art.nr. Emb.
60554 1

KABI Oil system with hose reel 15 mtr. Open

KABI air operated oil pump 3:1, 200 ltr. (60263).
Open hose reel incl. swivel mount bracket.
Oil control gun with drip valve (40400).
Drip tray for oil control gun (60699).

Hose reel: 15 mtr. x 1/2".
Max. pressure hose reel: 138 bar.
Max. pressure oil gun: 60 bar.
Max. pressure pump: 10 bar.
Connection hose: 800 mm.

Art.# Quantity
60554 1


KABI Olieanlæg med slangerulle 15 mtr. Åben

KABI trykluftdrevet oliepumpe 3:1, 200 ltr. (60263).
Åben slangerulle inkl. dreje/vippe montagebeslag.
Oliepåfyldningspistol med slange og drypventil (40394).
Drypbakke for påfyldningspistol (60699).

Slangerulle: 15 mtr. x 1/2".
Max. tryk slangerulle: 138 bar.
Max. tryk oliepistol: 60 bar.
Max. tryk pumpe: 10 bar.
Tilslutningsslange: 800 mm.

Art.nr. Emb.
60555 1

KABI Oil system with hose reel 15 mtr. Open

KABI air operated oil pump 3:1, 200 ltr. (60263).
Open hose reel incl. swivel mount bracket.
Oil control gun with hose and drip valve (40394).
Drip tray for oil control gun (60699).

Hose reel: 15 mtr. x 1/2".
Max. pressure hose reel: 138 bar.
Max. pressure oil gun: 60 bar.
Max. pressure pump: 10 bar.
Connection hose: 800 mm.

Art.# Quantity
60555 1


KABI Olieanlæg med slangerulle 15 mtr. Åben

KABI trykluftdrevet oliepumpe 3:1, 200 ltr. (60263).
Åben slangerulle inkl. dreje/vippe montagebeslag.
Oliepåfyldningspistol, digital forudindstillet (40380).
Drypbakke for påfyldningspistol (60699).

Slangerulle: 15 mtr. x 1/2".
Max. tryk slangerulle: 138 bar.
Max. tryk oliepistol: 70 bar.
Max. tryk pumpe: 10 bar.
Tilslutningsslange: 800 mm.

Art.nr. Emb.
60556 1

KABI Oil system with hose reel 15 mtr. Open

KABI air operated oil pump 3:1, 200 ltr. (60263).
Open hose reel incl. swivel mount bracket.
Oil control gun, digital preset (40380).
Drip tray for oil control gun (60699).

Hose reel: 15 mtr. x 1/2".
Max. pressure hose reel: 138 bar.
Max. pressure oil gun: 70 bar.
Max. pressure pump: 10 bar.
Connection hose: 800 mm.

Art.# Quantity
60556 1


KABI Olieanlæg med slangerulle 15 mtr. Åben

KABI trykluftdrevet oliepumpe 3:1, 200 ltr. (60263).
Åben slangerulle inkl. dreje/vippe montagebeslag.
Oliepåfyldningspistol, digital tæller (40385).
Drypbakke for påfyldningspistol (60699).

Slangerulle: 15 mtr. x 1/2".
Max. tryk slangerulle: 138 bar.
Max. tryk oliepistol: 70 bar.
Max. tryk pumpe: 10 bar.
Tilslutningsslange: 800 mm.

Art.nr. Emb.
60557 1

KABI Oil system with hose reel 15 mtr. Open

KABI air operated oil pump 3:1, 200 ltr. (60263).
Open hose reel incl. swivel mount bracket.
Oil control gun, digital counter (40385).
Drip tray for oil control gun (60699).

Hose reel: 15 mtr. x 1/2".
Max. pressure hose reel: 138 bar.
Max. pressure oil gun: 70 bar.
Max. pressure pump: 10 bar.
Connection hose: 800 mm.

Art.# Quantity
60557 1



KABI Olieanlæg med slangerulle 15 mtr. Åben

KABI trykluftdrevet oliepumpe 3:1, kort udgave (60267). Sugerør og slange for 200 ltr. tromle. Åben slangerulle inkl. dreje/vippe montagebeslag. Oliepåfyldningspistol med drypventil (40400). Drypbakke for påfyldningspistol (60699).

Slangerulle: 15 mtr. x 1/2".
Max. tryk slangerulle: 138 bar.
Max. tryk oliepistol: 60 bar.
Max. tryk pumpe: 10 bar.
Tilslutningsslange: 800 mm.

Art.nr.	Emb.
60754	1

KABI Oil system with hose reel 15 mtr. Open

KABI air operated oil pump 3:1, short edition (60267). Suction tube and hose for 200 ltr. drum. Open hose reel incl. swivel mount bracket. Oil control gun with drip valve (40400). Drip tray for oil control gun (60699).

Hose reel: 15 mtr. x 1/2".
Max. pressure hose reel: 138 bar.
Max. pressure oil gun: 60 bar.
Max. pressure pump: 10 bar.
Connection hose: 800 mm.

Art.#	Quantity
60754	1

**KABI Olieanlæg med slangerulle 15 mtr. Åben**

KABI trykluftdrevet oliepumpe 3:1, kort udgave (60267). Sugerør og slange for 200 ltr. tromle. Åben slangerulle inkl. dreje/vippe montagebeslag. Oliepåfyldningspistol med slange og drypventil (40394). Drypbakke for påfyldningspistol (60699).

Slangerulle: 15 mtr. x 1/2".
Max. tryk slangerulle: 138 bar.
Max. tryk oliepistol: 60 bar.
Max. tryk pumpe: 10 bar.
Tilslutningsslange: 800 mm.

Art.nr.	Emb.
60755	1

KABI Oil system with hose reel 15 mtr. Open

KABI air operated oil pump 3:1, short edition (60267). Suction tube and hose for 200 ltr. drum. Open hose reel incl. swivel mount bracket. Oil control gun with hose and drip valve (40394). Drip tray for oil control gun (60699).

Hose reel: 15 mtr. x 1/2".
Max. pressure hose reel: 138 bar.
Max. pressure oil gun: 60 bar.
Max. pressure pump: 10 bar.
Connection hose: 800 mm.

Art.#	Quantity
60755	1

**KABI Olieanlæg med slangerulle 15 mtr. Åben**

KABI trykluftdrevet oliepumpe 3:1, kort udgave (60267). Sugerør og slange for 200 ltr. tromle. Åben slangerulle inkl. dreje/vippe montagebeslag. Oliepåfyldningspistol, digital forudindstillelig (40380). Drypbakke for påfyldningspistol (60699).

Slangerulle: 15 mtr. x 1/2".
Max. tryk slangerulle: 138 bar.
Max. tryk oliepistol: 70 bar.
Max. tryk pumpe: 10 bar.
Tilslutningsslange: 800 mm.

Art.nr.	Emb.
60756	1

KABI Oil system with hose reel 15 mtr. Open

KABI air operated oil pump 3:1, short edition (60267). Suction tube and hose for 200 ltr. drum. Open hose reel incl. swivel mount bracket. Oil control gun, digital preset (40380). Drip tray for oil control gun (60699).

Hose reel: 15 mtr. x 1/2".
Max. pressure hose reel: 138 bar.
Max. pressure oil gun: 70 bar.
Max. pressure pump: 10 bar.
Connection hose: 800 mm.

Art.#	Quantity
60756	1

**KABI Olieanlæg med slangerulle 15 mtr. Åben**

KABI trykluftdrevet oliepumpe 3:1, kort udgave (60267). Sugerør og slange for 200 ltr. tromle. Åben slangerulle inkl. dreje/vippe montagebeslag. Oliepåfyldningspistol, digital tæller (40385). Drypbakke for påfyldningspistol (60699).

Slangerulle: 15 mtr. x 1/2".
Max. tryk slangerulle: 138 bar.
Max. tryk oliepistol: 70 bar.
Max. tryk pumpe: 10 bar.
Tilslutningsslange: 800 mm.

Art.nr.	Emb.
60757	1

KABI Oil system with hose reel 15 mtr. Open

KABI air operated oil pump 3:1, short edition (60267). Suction tube and hose for 200 ltr. drum. Open hose reel incl. swivel mount bracket. Oil control gun, digital counter (40385). Drip tray for oil control gun (60699).

Hose reel: 15 mtr. x 1/2".
Max. pressure hose reel: 138 bar.
Max. pressure oil gun: 70 bar.
Max. pressure pump: 10 bar.
Connection hose: 800 mm.

Art.#	Quantity
60757	1



KABI Slangerullesæt 1/2" x 10 mtr. Åben

Åben slangerulle inkl. dreje/vippe montagebeslag.
Oliepåfyldningspistol med drypventil (40400).

Slangerulle: 10 mtr. x 1/2".
Max. tryk slangerulle: 138 bar.
Max. tryk oliepistol: 60 bar.
Tilslutningsslange: 800 mm.

Art.nr. Emb.

60511 1

KABI Hose reel kit 1/2" x 10 mtr. Open

Open hose reel incl. swivel mount bracket.
Oil control gun with drip valve (40400).

Hose reel: 10 mtr. x 1/2".
Max. pressure hose reel: 138 bar.
Max. pressure oil gun: 60 bar.
Connection hose: 800 mm.

Art.# Quantity

60511 1


KABI Slangerullesæt 1/2" x 10 mtr. Åben

Åben slangerulle inkl. dreje/vippe montagebeslag.
Oliepåfyldningspistol med slange og drypventil (40394).

Slangerulle: 10 mtr. x 1/2".
Max. tryk slangerulle: 138 bar.
Max. tryk oliepistol: 60 bar.
Tilslutningsslange: 800 mm.

Art.nr. Emb.

60512 1

KABI Hose reel kit 1/2" x 10 mtr. Open

Open hose reel incl. swivel mount bracket.
Oil control gun with hose and drip valve (40394).

Hose reel: 10 mtr. x 1/2".
Max. pressure hose reel: 138 bar.
Max. pressure oil gun: 60 bar.
Connection hose: 800 mm.

Art.# Quantity

60512 1


KABI Slangerullesæt 1/2" x 10 mtr. Åben

Åben slangerulle inkl. dreje/vippe montagebeslag.
Oliepåfyldningspistol, digital forudindstillelig (40380).

Slangerulle: 10 mtr. x 1/2".
Max. tryk slangerulle: 138 bar.
Max. tryk oliepistol: 70 bar.
Tilslutningsslange: 800 mm.

Art.nr. Emb.

60513 1

KABI Hose reel kit 1/2" x 10 mtr. Open

Open hose reel incl. swivel mount bracket.
Oil control gun, digital preset (40380).

Hose reel: 10 mtr. x 1/2".
Max. pressure hose reel: 138 bar.
Max. pressure oil gun: 70 bar.
Connection hose: 800 mm.

Art.# Quantity

60513 1


KABI Slangerullesæt 1/2" x 10 mtr. Åben

Åben slangerulle inkl. dreje/vippe montagebeslag.
Oliepåfyldningspistol, digital tæller (40385).

Slangerulle: 10 mtr. x 1/2".
Max. tryk slangerulle: 138 bar.
Max. tryk oliepistol: 70 bar.
Tilslutningsslange: 800 mm.

Art.nr. Emb.

60514 1

KABI Hose reel kit 1/2" x 10 mtr. Open

Open hose reel incl. swivel mount bracket.
Oil control gun, digital counter (40385).

Hose reel: 10 mtr. x 1/2".
Max. pressure hose reel: 138 bar.
Max. pressure oil gun: 70 bar.
Connection hose: 800 mm.

Art.# Quantity

60514 1



KABI Slangerullesæt 1/2" x 10 mtr. Lukket

Lukket slangerulle inkl. dreje/vippe montagebeslag.
Oliepåfyldningspistol med drypventil (40400).

Slangerulle: 10 mtr. x 1/2".
Max. tryk slangerulle: 138 bar.
Max. tryk oliepistol: 60 bar.
Tilslutningsslange: 800 mm.

Art.nr.	Emb.
60521	1

KABI Hose reel kit 1/2" x 10 mtr. Closed

Closed hose reel incl. swivel mount bracket.
Oil control gun with drip valve (40400).

Hose reel: 10 mtr. x 1/2".
Max. pressure hose reel: 138 bar.
Max. pressure oil gun: 60 bar.
Connection hose: 800 mm.

Art.#	Quantity
60521	1

**KABI Slangerullesæt 1/2" x 10 mtr. Lukket**

Lukket slangerulle inkl. dreje/vippe montagebeslag.
Oliepåfyldningspistol med slange og drypventil (40394).

Slangerulle: 10 mtr. x 1/2".
Max. tryk slangerulle: 138 bar.
Max. tryk oliepistol: 60 bar.
Tilslutningsslange: 800 mm.

Art.nr.	Emb.
60522	1

KABI Hose reel kit 1/2" x 10 mtr. Closed

Closed hose reel incl. swivel mount bracket.
Oil control gun with hose and drip valve (40394).

Hose reel: 10 mtr. x 1/2".
Max. pressure hose reel: 138 bar.
Max. pressure oil gun: 60 bar.
Connection hose: 800 mm.

Art.#	Quantity
60522	1

**KABI Slangerullesæt 1/2" x 10 mtr. Lukket**

Lukket slangerulle inkl. dreje/vippe montagebeslag.
Oliepåfyldningspistol, digital forudindstillelig (40380).

Slangerulle: 10 mtr. x 1/2".
Max. tryk slangerulle: 138 bar.
Max. tryk oliepistol: 70 bar.
Tilslutningsslange: 800 mm.

Art.nr.	Emb.
60523	1

KABI Hose reel kit 1/2" x 10 mtr. Closed

Closed hose reel incl. swivel mount bracket.
Oil control gun, digital preset (40380).

Hose reel: 10 mtr. x 1/2".
Max. pressure hose reel: 138 bar.
Max. pressure oil gun: 70 bar.
Connection hose: 800 mm.

Art.#	Quantity
60523	1

**KABI Slangerullesæt 1/2" x 10 mtr. Lukket**

Lukket slangerulle inkl. dreje/vippe montagebeslag.
Oliepåfyldningspistol, digital tæller (40385).

Slangerulle: 10 mtr. x 1/2".
Max. tryk slangerulle: 138 bar.
Max. tryk oliepistol: 70 bar.
Tilslutningsslange: 800 mm.

Art.nr.	Emb.
60524	1

KABI Hose reel kit 1/2" x 10 mtr. Closed

Closed hose reel incl. swivel mount bracket.
Oil control gun, digital counter (40385).

Hose reel: 10 mtr. x 1/2".
Max. pressure hose reel: 138 bar.
Max. pressure oil gun: 70 bar.
Connection hose: 800 mm.

Art.#	Quantity
60524	1



KABI Slangerullesæt 1/2" x 15 mtr. Åben

Åben slangerulle inkl. dreje/vippe montagebeslag.
Oliepåfyldningspistol med drypventil (40400).

Slangerulle: 15 mtr. x 1/2".
Max. tryk slangerulle: 138 bar.
Max. tryk oliepistol: 60 bar.
Tilslutningsslange: 800 mm.

Art.nr. Emb.

60516 1

KABI Hose reel kit 1/2" x 15 mtr. Open

Open hose reel incl. swivel mount bracket.
Oil control gun with drip valve (40400).

Hose reel: 15 mtr. x 1/2".
Max. pressure hose reel: 138 bar.
Max. pressure oil gun: 60 bar.
Connection hose: 800 mm.

Art.# Quantity

60516 1


KABI Slangerullesæt 1/2" x 15 mtr. Åben

Åben slangerulle inkl. dreje/vippe montagebeslag.
Oliepåfyldningspistol med slange og drypventil (40394).

Slangerulle: 15 mtr. x 1/2".
Max. tryk slangerulle: 138 bar.
Max. tryk oliepistol: 60 bar.
Tilslutningsslange: 800 mm.

Art.nr. Emb.

60517 1

KABI Hose reel kit 1/2" x 15 mtr. Open

Open hose reel incl. swivel mount bracket.
Oil control gun with hose and drip valve (40394).

Hose reel: 15 mtr. x 1/2".
Max. pressure hose reel: 138 bar.
Max. pressure oil gun: 60 bar.
Connection hose: 800 mm.

Art.# Quantity

60517 1


KABI Slangerullesæt 1/2" x 15 mtr. Åben

Åben slangerulle inkl. dreje/vippe montagebeslag.
Oliepåfyldningspistol, digital forudindstillelig (40380).

Slangerulle: 15 mtr. x 1/2".
Max. tryk slangerulle: 138 bar.
Max. tryk oliepistol: 70 bar.
Tilslutningsslange: 800 mm.

Art.nr. Emb.

60518 1

KABI Hose reel kit 1/2" x 15 mtr. Open

Open hose reel incl. swivel mount bracket.
Oil control gun, digital preset (40380).

Hose reel: 15 mtr. x 1/2".
Max. pressure hose reel: 138 bar.
Max. pressure oil gun: 70 bar.
Connection hose: 800 mm.

Art.# Quantity

60518 1


KABI Slangerullesæt 1/2" x 15 mtr. Åben

Åben slangerulle inkl. dreje/vippe montagebeslag.
Oliepåfyldningspistol, digital tæller (40385).

Slangerulle: 15 mtr. x 1/2".
Max. tryk slangerulle: 138 bar.
Max. tryk oliepistol: 70 bar.
Tilslutningsslange: 800 mm.

Art.nr. Emb.

60519 1

KABI Hose reel kit 1/2" x 15 mtr. Open

Open hose reel incl. swivel mount bracket.
Oil control gun, digital counter (40385).

Hose reel: 15 mtr. x 1/2".
Max. pressure hose reel: 138 bar.
Max. pressure oil gun: 70 bar.
Connection hose: 800 mm.

Art.# Quantity

60519 1



KABI mobilt olieanlæg 3:1

For 180-205 ltr. olietromler.

- 3:1 trykluftdrevet oliepumpe
- 4 m olieslange
- Oliepåfyldningspistol (40400)
- Transportvogn
- Diverse fittings

Art.nr. Emb.

60257 1

NB: Pumpen skal forsynes med tågesmøring (FRL unit) 60286.

KABI Mobile oil system 3:1

For 180-205 ltr. oil drums.

- 3:1 pneumatic oil pump
- 4m oil hose
- Oil control gun (40400)
- Trolley
- Fittings

Art.# Quantity

60257 1

Note: The pump must be supplied with mist lubrication (FRL unit) 60286.

**KABI mobilt olieanlæg med digital oliepistol**

For 180-205 ltr. olietromler.

- 3:1 trykluftdrevet oliepumpe
- 4 m olieslange
- Digital oliepistol (40385)
- Transportvogn
- Diverse fittings

Art.nr. Emb.

60258 1

NB: Pumpen skal forsynes med tågesmøring (FRL unit) 60286.

KABI Mobile oil system with digital nozzle

For 180-205 ltr. oil drums.

- 3:1 pneumatic oil pump
- 4m oil hose
- Digital control gun (40385)
- Trolley
- Fittings

Art.# Quantity

60258 1

Note: The pump must be supplied with mist lubrication (FRL unit) 60286.

**KABI mobilt olieanlæg med forud-indstillelig oliepistol**

For 180-205 ltr. olietromler.

- 3:1 trykluftdrevet oliepumpe
- 4 m olieslange
- Forud-indstillelig digital oliepistol (40380)
- Transportvogn
- Diverse fittings

Art.nr. Emb.

60259 1

NB: Pumpen skal forsynes med tågesmøring (FRL unit) 60286.

KABI mobile oil system with preset oil control gun

For 180-205 ltr. oil drums.

- 3:1 pneumatic oil pump
- 4m oil hose
- Preset digital oil control gun (40380)
- Trolley
- Fittings

Art.# Quantity

60259 1

Note: The pump must be supplied with mist lubrication (FRL unit) 60286.



KABI Stationært olieanlæg 180-205 ltr.

For smørelie op til SAE 130.

- 3:1 trykluftdrevet oliepumpe (60263)
- 4 mtr. olieslange
- Manuel oliepåfyldningspistol (40400)
- Diverse fittings

Art.nr. Emb.

60247 1

NB: Pumpen skal forsynes med tågesmøring (FRL unit) 60286.

KABI Stationary oil system 180-205 ltr.

For lubricating oil up to SAE 130.

- 3:1 pneumatic oil pump (60263)
- 4 mtr. oil hose
- Manual oil control gun (40400)
- Fittings

Art.# Quantity

60247 1

Note: The pump must be supplied with mist lubrication (FRL unit) 60286.



KABI Stationært olieanlæg 180-205 ltr.

For smørelie op til SAE 130.

- 3:1 trykluftdrevet oliepumpe (60263)
- 4 mtr. olieslange
- Digital oliepåfyldningspistol (40385)
- FRL unit (60286)
- Diverse fittings

Art.nr. Emb.

60248 1

KABI Stationary oil system 180-205 ltr.

For lubricating oil up to SAE 130.

- 3:1 pneumatic oil pump (60263)
- 4 mtr. oil hose
- Digital oil control gun (40385)
- FRL unit (60286)
- Fittings

Art.# Quantity

60248 1



KABI Stationært olieanlæg 180-205 ltr.

For smørelie op til SAE 130.

- 3:1 trykluftdrevet oliepumpe (60263)
- 4 mtr. olieslange
- Forudindstillelig digital oliepistol (40380)
- FRL unit (60286)
- Diverse fittings

Art.nr. Emb.

60249 1

KABI Stationary oil system 180-205 ltr.

For lubricating oil up to SAE 130.

- 3:1 pneumatic oil pump (60263)
- 4 mtr. oil hose
- Preset digital oil control gun (40380)
- FRL unit (60286)
- Fittings

Art.# Quantity

60249 1



Oliefyldningspistol med antidrypventil

Udløbsstuds: 135°, ø12mm. Med indbygget drejeled og filter. Tilslutning: 1/2"R (udv.).

Art.nr. Emb.
40399 1

Oil control gun with non drip nozzle

Outlet spout: 135°, ø12mm. With built-in swivel and filter. Connection: 1/2" BSP (M).

Art.# Quantity
40399 1

**Oliefyldningspistol med manuel drypventil**

Håndtaget kan låses til kontinuerlig drift/aftapning eller låses for at forhindre utilsigtet aftapning. Med indbygget drejeled og filter.

Udløbsstuds: 45°, ø16mm.

Max. flow: 70 ltr./min.

Max. indgangstryk: 60 bar.

Tilslutning: 1/2"R (indv.).

Arbejdstemperatur: -10°C til 60°C.

Art.nr. Emb.
40400 1

Oil control gun with manual drip valve

The handle can be locked for continuous operation/drainage or locked to prevent accidental draining. With built-in swivel and filter.

Outlet connection: 45°, ø16mm.

Max. flow: 70 ltr./min.

Max. inlet pressure: 60 bar.

Connection: 1/2" BSP (F).

Working temperature: -10°C to 60°C.

Art.# Quantity
40400 1

**Oliefyldningspistol med slange**

Manuel drypventil. Håndtaget kan låses til kontinuerlig drift/aftapning eller låses for at forhindre utilsigtet aftapning. Med indbygget drejeled og filter.

Max. flow: 70 ltr./min.

Max. indgangstryk: 60 bar.

Tilslutning: 1/2"R (indv.).

Arbejdstemperatur: -10°C til 60°C.

Art.nr. Emb.
40394 1

Oil control gun with hose

Manual drip valve. The handle can be locked for continuous operation/drainage or locked to prevent accidental draining. With built-in swivel and filter.

Max. flow: 70 ltr./min.

Max. inlet pressure: 60 bar.

Connection: 1/2" BSP (F).

Working temperature: -10°C to 60°C.

Art.# Quantity
40394 1

**Oliefyldningspistol, forudindstillelig**

Med digitalt display. Oliepistolen kan indstilles til en given mængde 0-99,9 ltr. 20 cm fleksibel slange og antidrypventil. Med indbygget drejeled og filter.

Forudindstilles til: 0-99,9 ltr.

Målenøjagtighed: +/- 0,5%.

Max. flow: 30 ltr./min.

Min/max. arbejdsdruk: 3-70 bar.

Tilslutning: 1/2"R (indv.).

Art.nr. Batterier (medfølger) Emb.
40380 4 x AA - 1,5V 1

Oil control gun with preset meter

With digital display. The oil gun can be set to a given amount 0-99.9 ltr. 20 cm flexible outlet hose and anti-drip valve. With built-in swivel and filter.

Preset for: 0-99.9 ltr.

Measurement accuracy: +/- 0.5%.

Max. flow: 30 ltr./min.

Min/max. working pressure: 3-70 bar.

Connection: 1/2" BSP (F).

Art.# Batteries (included) Quantity
40380 4 x AA - 1.5V 1

**Oliefyldningspistol med digitalt display**

20 cm fleksibel slange og antidrypventil.

Med indbygget drejeled og filter.

Viskositet: 8-5000 mPa.s.

Målenøjagtighed: +/- 0,5%.

Max. flow: 30 ltr./min.

Arb. temperatur: -10°C til 50°C.

Min/max. arbejdsdruk: 3-70 bar.

Tilslutning: 1/2"R (indv.).

Art.nr. Batteri (medfølger) Emb.
40385 CR2 - 3V - 800mAh 1

Oil control gun with digital display

20 cm flexible outlet hose and anti-drip valve.

With built-in swivel and filter.

Viscosity: 8-5000 mPa.s.

Measurement accuracy: +/- 0.5%.

Max. flow: 30 ltr./min.

Working temperature: -10°C to 50°C.

Min/max. working pressure: 3-70 bar.

Connection: 1/2" BSP (F).

Art.# Battery (included) Quantity
40385 CR2 - 3V - 800mAh 1



KABI Slangerulle 1/2" x 10 mtr. Åben

Åben slangerulle for olie og lign. væsker.
Inkl. svingbart beslag.

Max. tryk: 138 bar (2000 psi).
Tilslutningslange: 800 mm.

Art.nr.	Emb.
60510	1

KABI Hose reel 1/2" x 10 mtr. Open

Open hose reel for oil and similar liquid.
Incl. swing bracket.

Max. pressure: 138 bar (2000 psi).
Connection Hose: 800 mm.

Art.#	Quantity
60510	1


KABI Slangerulle 1/2" x 15 mtr. Åben

Åben slangerulle for olie og lign. væsker.
Inkl. svingbart beslag.

Max. tryk: 138 bar (2000 psi).
Tilslutningslange: 800 mm.

Art.nr.	Emb.
60515	1

KABI Hose reel 1/2" x 15 mtr. Open

Open hose reel for oil and similar liquid.
Incl. swing bracket.

Max. pressure: 138 bar (2000 psi).
Connection Hose: 800 mm.

Art.#	Quantity
60515	1


KABI Slangerulle 1/2" x 10 mtr. Lukket

Lukket slangerulle for olie og lign. væsker.
Inkl. svingbart beslag.

Max. tryk: 138 bar (2000 psi).
Tilslutningslange: 800 mm.

Art.nr.	Emb.
60520	1

KABI Hose reel 1/2" x 10 mtr. Closed

Closed hose reel for oil and similar liquid.
Incl. swing bracket.

Max. pressure: 138 bar (2000 psi).
Connection Hose: 800 mm.

Art.#	Quantity
60520	1


KABI Drypbakke

Vægmonteret drypbakke inkl. holder til oliepistol
og slange. Til opsamling af dryp fra oliepistol.

Art.nr.	Emb.
60699	1

KABI Drip tray

Wall-mounted drip tray incl. holder for oil gun and
hose. Used to collect oil drips from oil gun.

Art.#	Quantity
60699	1


Kuglehane 1/2"R med filter

Art.nr.	Emb.
40425	1

Ball valve 1/2"BSP with filter

Art.#	Quantity
40425	1


Kuglehane 1/2"R

Art.nr.	Emb.
401367262	1

Ball valve 1/2"BSP

Art.#	Quantity
401367262	1


Nippel

Art.nr.	Gevind	Emb.
80005	1/8"R (udv.) x 1/8"R (udv.)	1
80015	1/4"R (udv.) x 1/4"R (udv.)	1

Adapter

Art.#	Thread	Quantity
80005	1/8"BSP (M) x 1/8"BSP (M)	1
80015	1/4"BSP (M) x 1/4"BSP (M)	1


Fittings

Art.nr.	Type	Størrelse	Emb.
40294	Drejeled	1/2"R (udv. - indv.)	1
80025	Nippel	1/2"R-1/2"R	1
80030	Nippel	3/4"R-1/2"R	1

Fittings

Art.#	Type	Size	Quantity
40294	Swivel	1/2"BSP (M - F)	1
80025	Connector	1/2"BSP-1/2"BSP	1
80030	Connector	3/4"BSP-1/2"BSP	1



Olieslanger med omløbere

Tilslutning Indv. 1/2"R, omløber.

Art.nr.	Længde	Emb.
40402	2,0 meter	1
40404	4,0 meter	1
40406	6,0 meter	1
40410	10,0 meter	1

Oil hoses with nuts

Thread 1/2" BSP (F).

Art.#	Length	Quantity
40402	2.0 meter	1
40404	4.0 meter	1
40406	6.0 meter	1
40410	10.0 meter	1

**Sugeslange til korte oliepumper**

Komplet med 1040mm sugerør med Fadforskrunding 2"R, bundventil og 2,5 m slange. Tilslutning til pumpe 1"R.

Art.nr.	Emb.
40250	1

Suction hose for short oil pumps

Complete with 1040mm suction, bung adaptor 2" BSP, foot valve and 2.5 m hose. Thread 1" BSP.

Art.#	Quantity
40250	1

**Vægbeslag for kort pumpe**

Tilslutning 2"R.

Art.nr.	Emb.
40251	1

Bracket for short pump

Thread 2" BSP.

Art.#	Quantity
40251	1

**Reduktionsventil**

Med manometer (FR unit).

Art.nr.	Emb.
60285	1

Air Regulator

Reduction valve with pressure gauge (FR unit).

Art.#	Quantity
60285	1

**FRL unit**

Reduktionsventil med manometer, vandudskiller og tågesmøring.

Art.nr.	Emb.
60286	1

FRL unit

Reduction valve with pressure gauge, water separator and mist lubricators.

Art.#	Quantity
60286	1

**KABI Niveau måler til væsker**

Passer til 200 ltr. tromler af stål eller plast. Velegnet til ikke-aggressive væsker som kølesmøremidler, emulsioner, olie, frostvæske, fryringsolie m.fl.

Art.nr.	Emb.
40201	1

KABI Liquid level indicator

Usable for 200 ltr. drums in steel or plastic. Suitable for non-corrosive liquids, such as cooling/lubrication concentrates, emulsions, oils, anti-freeze, heating oil etc.

Art.#	Quantity
40201	1



Opsamlingskar m/aftagelig rist

Fremstillet af polyethylen. Flere kar kan let samles ved hjælp af indbyggede montagelister, så man får en større platform. Kapacitet: 230 liter. Læssekapacitet: 1000 kg. Vægt: 21 kg. Længde: 1320 mm. Bredde: 670 mm. Højde: 420 mm.

Art.nr.	Type	Emb.
40116	Opsamlingskar m/rist	1

Art.nr.	Ekstraudstyr	Emb.
40117	Montage dæksel - T	1
40118	Montage dæksel - Kryds	1

Drum spill pallet w/removable platform

Made of polyethylene. Multiple spill pallets can easily be assembled, to create a bigger platform. Capacity: 230 liter. Loading capacity: 1000 kg. Weight: 21 kg. Length: 1320 mm. Width: 670 mm. Height: 420 mm.

Art.#	Type	Quantity
40116	Drum spill pallet w/platform	1

Art.#	Accessories	Quantity
40117	Assembly cover - T	1
40118	Assembly cover - Cross	1



40116



40118

40117

Transportvogn

For 18-60 kg spand.

Art.nr.	Emb.
40326	1
60436	1

Drum Trolley

For 18-60 kg bucket.

Art.#	Quantity
40326	1
60436	1



40326

60436

Transportvogn

For 18-60 kg spand.

Art.nr.	Emb.
40801050	1

Drum Trolley

For 18-60 kg bucket.

Art.#	Quantity
40801050	1

**Transportvogn**

For 200 kg tromle.

Art.nr.	Emb.
40328	1

Trolley

For 200 kg drum.

Art.#	Quantity
40328	1

**Spunsnøgle "kødben"**

For 14 & 22mm firkant. 300mm skaft. Sort lakeret.

Art.#	Quantity
41174	1

Bung wrench

For 14 & 22mm square. Handle 300mm.

Art.#	Quantity
41174	1

**Spunsnøgle Aluminium**

For 3/4" & 2" Fadforskrunding. 250mm skaftlængde.

Art.nr.	Emb.
41175	1

Bung wrench Aluminium

For 3/4" & 2" bung adaptor. Handle 250mm.

Art.#	Quantity
41175	1



Vægtstangsoliepresse

Vægtstangsoliepresse med slagfast polyamid beholder. Anvendes til olie samt fedt med lav viskositet. Leveres med 300mm slange og 4-bakket smørehoved.

Indhold: 500 ccm.

Max. arbejdsdruk: 400 bar / 5.800 PSI.

Ydelse: ca. 1,9 ccm per slag.

Tilslutning: 1/8"R.

Art.nr.	Emb.
KO400H	1

Lever oil gun

Lever oil gun with an impact-resistant polyamide container. Used for oil but also for grease with low viscosity. Comes with 300mm hose and 4-jaw coupler.

Capacity: 500 ccm.

Max. operating pressure: 400 bar / 5.800 PSI.

Delivers: approx. 1.9 ccm per stroke.

Connection: 1/8" BSP.

Art.#	Quantity
KO400H	1

**Oliesmørehoved 4-bakket**

Med kugleventil. Tæt indtil 12° hældning.

Ø14 x 39,5mm.

Kæber af drejet stål.

Tilslutning: 1/8"R.

Max: 600 bar. Arbejdsdruk: 400 bar.

Art.nr.	Emb.
36598	10

Hydraulic oil connector 4 Jaw

With ball valve. Absolute tightness at tilt as much as 12°.

Ø14 x 39,5mm. Connection: 1/8" BSP

Max. pressure: 600 bar.

Work pressure: 400 bar.

Art.#	Quantity
36598	10

**KABI Smøreslanger**

Thermoplastiske gummismøreslanger.

Tilslutning: 1/8"R.

Arb. tryk: 400 bar. Sprængningstryk: 950 bar.

Art.nr.	Længde	Emb.
KF412	300mm	1
KF418	500mm	1
KF424	600mm	1
KF436	1000mm	1
KF460	1500mm	1

KABI Lubricating Hoses

Thermoplastic rubber lubricating hoses.

Connection: 1/8" BSP.

Work pressure: 400 bar. Burst pressure: 950 bar.

Art.#	Length	Quantity
KF412	300mm	1
KF418	500mm	1
KF424	600mm	1
KF436	1000mm	1
KF460	1500mm	1

**ABNOX Wanner stødpresse for olie 300-000**

Teleskopmodel med hulmundestykke nr 433.

Kapacitet: 120ccm. Længde: 270mm.

Tilslutning: 1/8"R.

Art.nr.	Emb.
31960	1

ABNOX Wanner push type for oil 300-000

Telescope model with hollow nozzle No 433 (38410).

Capacity: 120ccm. Length: 270mm.

Connection: 1/8" BSP.

Art.#	Quantity
31960	1

**Aluminiumsstempel**

Når syntetiske olier bruges i 31960 bør stemplet udskiftes med dette special stempel.

Art.nr.	Emb.
AX30039	1

Aluminum piston

When using synthetic oils in 31960 the piston should be replaced with this special piston.

Art.#	Quantity
AX30039	1



KABI 3 trins olieskift sæt

For havemaskiner med benzinmotor.

Sættet inkluderer ø90mm tragt, 0,75 ltr. Polyethylen beholder med kapsel samt kraftig 0,5 ltr. transparent sugepumpe inkl. sugeslange med hætte. Sættet udmærker sig ved at sugepumpens volumen gør det muligt at opsuge alt brugt olie på en gang, i modsætning til andre mærker på markedet, hvor det tager 3-5 gange så lang tid.

Art.nr.	Emb.
KA3000	1

KABI 3 step oil change kit

For diesel driven garden machinery.

The kit includes:
Ø90mm funnel, 0.75 ltr. Polyethylene container with capsular, a powerfull 0.5 ltr. transparent suction pump incl. suction hose with cap.
This kit stands out by the fact, that this suction pump can consist all of the used oil in one shot.

Art.#	Quantity
KA3000	1


KABI Oliesugepumpe

Af forzinket stål med fleksibel udløbsslange. Anvendes til både påfyldning og sugning. Sugslange ø16mm x 300mm.

Art.nr.	Indhold	Emb.
KF500	0,5 ltr.	1

KABI Oil suction pump

Zinc plated steel with a flexible outlet hose. Used for both filling and suction. Suction hose ø16mm x 300mm.

Art.#	Capacity	Quantity
KF500	0.5 ltr.	1


KABI Oliesugepumpe Plast

Af plast med fleksibel udløbsslange. Anvendes til både påfyldning og sugning. Indhold 500ccm. Sugslange med hætte: ø8mm x 300mm.

Art.nr.	Indhold	Emb.
34560	0,5 ltr.	1

KABI Oil suction pump Plastic

Made in plastic with a flexible outlet hose. Used for both filling and suction. Contains 500ccm. Suction hose with cap: ø8mm x 300mm.

Art.#	Capacity	Quantity
34560	0.5 ltr.	1


Reilang Sugepumpe

Pumpen er af aluminium og er modstandsdygtig overfor f.eks. mineralsk, syntetisk og biologiske olier samt kølevæske med flere.

Art.nr.	Indhold	Sugerør	Emb.
33498	0,26 ltr.	ø10,5 x 100mm	1
33499	0,72 ltr.	ø10,5 x 100mm	1

Reilang Suction pump

Single acting pump in aluminum. The pump is resistant to mineral, synthetic and biological oils, kerosene, antifreeze, brake fluid etc.

Art.#	Capacity	Suction tube	Quantity
33498	0.26 ltr.	ø10.5 x 100mm	1
33499	0.72 ltr.	ø10.5 x 100mm	1


Reilang Dobbeltpumpe

Dette fantastiske stykke værktøj har den kvalitet at den både udfører suge- og pumpefunktion i samme aftræk. Med denne funktion finder den anvendelse i såvel industrien såvel som et hobby-værktøj. Dobbeltpumpen kan anvendes til lettere olier, mineral olie, syntetisk olie, biologisk olie, petroleum, kølevæske, frostvæske, bremsevæske og mange flere væsker. Pumpen fås med 600mm lang slange og er incl. 2 stk. kugleventiler.

Art.nr.	Indhold	Emb.
34499	0,72 ltr.	1

Reilang Double pump

This fantastic tool has the quality to perform both suction and pumping function in the same motion. With this feature, the pump is suitable for industrial use as well as a hobby tool. The double pump can be used for lighter oils, mineral oil, synthetic oil, bio-oil, petroleum, coolant, antifreeze, brake fluid and many more liquids. The pump is supplied with 600mm long hose and incl. 2 pcs. ball valves.

Art.#	Capacity	Quantity
34499	0.72 ltr.	1


Reilang Doseringspumpe

Håndpumpe med cylinder af klar plast. Inklusiv fast rør og slange, ø6mm udløb. Med op/ned vendt doseringsskala.

Art.nr.	Indhold	Emb.
34459	150 ml	1

Reilang Dosier hand pump

Hand pump with transparent PVC cylinder. Incl. metal tube and hose, ø6mm outlet. With measurement scale.

Art.#	Capacity	Quantity
34459	150 ml	1


Reilang Doseringspumpe

Håndpumpe med cylinder af klar plast. Med transparent slange. Udløbsrør ø10mm. Med op/ned vendt doseringsskala.

Art.nr.	Indhold	Emb.
34460	1000 ml	1

Reilang Dosier hand pump

Hand pump with transparent PVC cylinder. Clear plastic hose. Discharge ø10mm. With measurement scale.

Art.#	Capacity	Quantity
34460	1000 ml	1



KABI Elektrisk multipumpe

Elektrisk pumpe i PP plast. 2 mtr. udløbslange og pistol med ø19mm udløbsstuds. IP55 kapsling. To adaptore med Mauser og Trisure gevind medfølger. For 200 ltr. tromle samt 1000 ltr. IBC tank. Pumpen har en støjsvag motor, og er let at transportere.

Sugerørs længde: 850-1245 mm.
Sugerørs max. diameter: ø48 mm.
Spænding: 12V DC eller 230V AC.
Kapacitet: 14 l/min.
Drifttid: Max. 15 min.
Gevind: 2"R (udv).
Pakning: Viton.
Nettovægt: 2,4 kg.

Velegnet til: AdBlue®, vand, frostvæske og sprinklervæske.

Art.nr.	Emb.
40170	1

KABI Electric multipump

Electric pump in PP plastic. 2 mtr. outlet hose and nozzle with ø19mm outlet tube. IP55 enclosure. Two adaptors with Mauser and Trisure thread is included. For 200 ltr. drum and 1000 ltr. IBC tank. The pump is silent in use and easy to transport.

Suction pipe length: 850-1245 mm.
Suction pipe max. diameter: ø48 mm.
Power: 12V DC or 230V AC.
Capacity: 14 l/min.
Operating time: Max. 15 min.
Thread: 2" BSP (M).
Gasket: Viton.
Net weight: 2.4 kg.

Suitable for: AdBlue®, water, anti freeze and windshield washer fluid.

Art.#	Quantity
40170	1

**Akku El-pumpe med genopladeligt batteri**

Elektrisk pumpe med genopladeligt 14,8V Li-Ion batteri. 2 mtr. slange samt pistol med ø15mm udløbsstuds. Inkl. 3 adaptore med Mauser, Trisure og DIN71 gevind. Batteri og lader til 230V AC medfølger.

Sugerørs længde: 575-865 mm
Sugerørs max. diameter: ø38 mm
Batteri: 14,8V
Kapacitet: 18 l/min
Drifttid: Max. 15 min (herefter 30 min. pause)
Gevind: 2"R (udv)
Nettovægt: 1,9 kg

Pumpen er velegnet til:
AdBlue®, Vand, Frostvæske og Sprinklervæske.

Art.nr.	Tæller	Spænding	Pistol	Emb.
40160	Nej	Li-Ion Batteri	Manuel	1
		14,8V / 2,9Ah		

Accu Electric pump with rechargeable battery

Electric pump with rechargeable 14.8V Li-Ion battery. 2 mtr. discharge hose and nozzle with ø15mm outlet tube. Incl. 3 adapters with Mauser, Trisure and DIN71 thread. Battery and charger for 230V AC included.

Suction pipe length: 575-865 mm
Suction pipe max. diameter: ø38 mm
Battery: 14.8V
Capacity: 18 l/min
Duty cycle: Max. 15 min (then 30 min. off)
Thread: 2" BSP (M)
Net weight: 1.9 kg

The pump is suitable for:
AdBlue®, Water, Antifreeze, Windscreen washer fluid.

Art.#	Meter	Power	Nozzle	Quantity
40160	No	Li-ion Battery	Manual	1
		14,8V / 2,9Ah		

**Li-Ion 14,8V / 2,9 Ah batteri**

Batteri til Akku El-pumpe (40160). Indikator lys viser hvor meget spænding der er tilbage i batteriet, når man trykker på check-knappen. Ladetid ca. 3 timer.

Art.nr.	Emb.
44165	1

Li-Ion 14.8V / 2.9 Ah battery

Battery for Accu Electric pump (40160). LED lights indicates how much power is left in the battery, when you push the check button. Charging time is approx. 3 hours.

Art.#	Quantity
44165	1

**Selvansugende Boremaskinepumpe**

Velegnet til væsketransport ved hjælp af en 230V elektrisk boremaskine, som kan køre med min. 2800 omdr./min. Specielt velegnet til diesel, vand (ikke drikkevand), ukrudtsmidler samt anti-frostvæske. Er ikke velegnet til batteri-drevne boremaskiner.

Flow: 30 l/min (ved 3000 o/min., vand 20°C).
Selvansugende op til max. 1,5 mtr. (vand 20°C).
Pumper op til 20 mtr. horisontalt (afhænger af medie/boremaskinen).
Tåler tørkørsel i kortere perioder.
Slangestuds: ø24mm.
Pumpehus med indvendig messingforing.
Rustfri stålaksel og -stift.

Art.nr.	Emb.
KABP01	1

Self-priming Drill pump

Suitable for transporting liquid by the use of a 230V electric drill, capable of min. 2800 rpm. Especially suitable for diesel, water (not drinking water), herbicides and anti-freeze. The pump is not suitable for battery-powered drills.

Flow: 30 l/min (at 3000 rpm, water 20°C).
Self-priming up to max. 1.5 mtr. (water 20°C).
Pumps up to 20 mtr. horizontally (depending on media / drill).
Resistant to dry operation for shorter periods.
Hose connection: ø24mm.
Pump body inner parts in brass.
Stainless steel shaft and pin.

Art.#	Quantity
KABP01	1



KABI AdBlue® vægtstangspumpe

Med 3-delt teleskoprør for 60-200 ltr. tromler samt 1000 ltr. IBC tanke. Inkl. Trisure og Mauser adaptere (40174A er også inkl. adapter til 60 ltr. dunke).

2 mtr. slange med ø19mm udløbsrør.

Kapacitet: ca. 0,5 ltr. pr. slag. Pakning: Viton.

Velegnet til: AdBlue®, vand, frostvæske og sprinklervæske.

Art.nr.	Komplet pumpesæt for	Emb.
40174A	1000 L - 200 L - 60 L	1

KABI AdBlue® lever pump

With telescopic tube in 3 parts, for 60-200 ltr. drums and 1000 ltr. IBC containers. Incl. Trisure and Mauser adapters (40174A also incl. adapter for 60 ltr. cans).

2 mtr. hose, ø19mm outlet tube.

Capacity: approx. 0.5 ltr. per stroke. Gasket: Viton.

Suitable for: AdBlue®, water, anti freeze and windshield washer fluid.

Art.#	Complete pump kit for	Quantity
40174A	1000 L - 200 L - 60 L	1

**KABI vægtstangspumpe**

Med 3-delt teleskoprør for 60-200 ltr. tromler samt 1000 ltr. IBC tanke. Inkl. Trisure og Mauser adaptere. (40177B er også inkl. adapter til 20 ltr. dunke).

1,5 mtr. slange med ø19mm udløbsrør.

Kapacitet: ca. 0,5 ltr. pr. slag. Pakning: NBR.

Velegnet til: Diesel, fyringsolie, vand, olieholdige midler, sprinklervæske, kølervæske, antifrost væsker, landbrugskemikalier mm.

Art.nr.	Komplet pumpesæt for	Emb.
40177	1000 L - 200 L	1
40177B	1000 L - 200 L - 20 L	1

KABI lever pump

With telescopic tube in 3 parts, for 60-200 ltr. drums and 1000 ltr. IBC containers. Incl. Trisure and Mauser adapters. (40177B also incl. adapter for 20 ltr. cans).

1.5 mtr. hose, ø19mm outlet tube.

Capacity: approx. 0.5 ltr. per stroke. Gasket: NBR.

Suitable for: Diesel oil, heating oil, water, oily agents, windshield washer fluid, coolants, anti-freeze, agricultural chemicals etc.

Art.#	Complete pump kit for	Quantity
40177	1000 L - 200 L	1
40177B	1000 L - 200 L - 20 L	1

**Hævertpumpe type HP-26E**

For 200 ltr. tromler.

Er inkl. 1,1m udløbslange af polyethylen og er således modstandsdygtig over for f.eks. syre, benzin, olie m.m.

Velegnet til fyldning af dunke m.v. fra tromler eller større beholdere. Kapacitet ca. 26 ltr./min.

Art.nr.	Tiislutning	Emb.
40208	2"R (Metal tromler)	1
40209	Trisure (Plast tromler, 208L)	1

Siphon pump type HP-26E

For 200 ltr. drums.

With 1,1m polyethylene outlet hose.

The pump is resistant to acid, petrol, oil etc.

Ideal for the filling of jerry cans from drums or large containers. Capacity approx. 26 ltr./min.

Art.#	Connection	Quantity
40208	2" BSP (Metal drums)	1
40209	Trisure (Plastic drums, 208L)	1

**Hævertpumpe type HP-06E**

Mini syrehævert for overføring af væsker såsom benzin, olie, vand, frostvæske m.v. Kapacitet: ca. 6 ltr./min.

Art.nr.	Emb.
40205	1

Siphon pump type HP-06E

Mini acid siphon for transmission of fluids such as diesel, oil, water, antifreeze etc. Capacity: approx. 6 ltr./min.

Art.#	Quantity
40205	1



Multipumpe 3000

Med teleskoprør for 50-205 ltr. tromler.
2"R fadforskrunding.
Kapacitet: ca. 0,33 ltr. pr. slag.

Art.nr.	Pakning	Emb.
40172	Nitril-R	1
40173	EPDM	1

Multi pump 3000

With telescopic tube for 50-205 ltr. drums.
2" BSP bung adaptor.
Capacity: approx. 0.33 ltr. per stroke.

Art.#	Seal	Quantity
40172	Nitril-R	1
40173	EPDM	1

**Trykluftdrevet væskepumpe 1:1**

Max. tryk: 7 bar.
Forsynet med kugleventil på udløb.
Lufttilslutning: 1/4"R.
Væske udløb.: Kugleventil.
Med 2"R fadforskrunding.
Kapaciteten er baseret på fri gennemstrømning.
Max. 15 ltr./min. Teleskoprør: 400-915mm.

Art.nr.	Pakning	Emb.
41051	Viton	1
41052	Nitril	1
41053	EPDM	1

NB: Må **ikke** anvendes til eksplosive væsker.

Pneumatic driven liquid pump 1:1

Max. pressure: 7 bar.
Equipped with ball valve on the outlet.
Air connection: 1/4" BSP.
Liquid effluent.: Ball valve.
With 2" BSP bung.
The capacity is based on free flow.
Max. 15 ltr./min. Telescopic: 400-915mm.

Art.#	Seal	Quantity
41051	Viton	1
41052	Nitril	1
41053	EPDM	1

Note: Do **not** use with inflammable fluids.

**KABI Rotationspumpe**

Pumpehus: PVC
Pakning: teflon (PTFE)
Sugerør: 3-delt 50-205 ltr.
Kapacitet: ca. 0,3 ltr. pr. omgang
Udløb: 1"
Tilslutning: 2"R fadforskrunding
Egnet til: Kølervæske, sprinklervæske og rengøringsmidler.

Art.nr.	Beskrivelse	Emb.
40193		1
40193AB	40193 + ekstra adaptor 2"R (indv.) - DIN 71 (indv.)	1

KABI Rotary pump

Casing: PVC
Sealing ring: teflon (PTFE)
Suction tube: 3 parts 50-205 ltr.
Capacity: approx. 0,3 ltr. per round
Outlet: 1"
Connection: 2" BSP bung adapter
Ideal for: coolants, washer fluid and cleaning products.

Art.#	Description	Quantity
40193		1
40193AB	40193 + extra adapter 2" BSP (F) - DIN 71 (F)	1

**KABI Rotationspumpe Classic**

Pumpen er velegnet til smøreløser og andre tyktflydende væsker. 3-delt sugerør til brug for 50-205 ltr. tromler.
Kapacitet: 34 l/min ved 135 o/min.
Max. væsketemperatur: 60°C.
Montering: 2"R (udv.) adapter.
Gevind indløb: 1"R (indv.).
Gevind udløb: 3/4"R (indv.).
Materialer: Stål, støbejern, syntetisk gummi.
Max. viskositet: 1000 cSt (40°C).

Art.nr.	Udløb	Emb.
40191	Bukket udløbsrør	1
40191S	Bukket udløbsrør + 1m slange med bukket udløbstud	1

KABI Rotary pump Classic

This pump is ideal for hydraulic oils and other viscous fluids. 3 parts suction tube for 50-205 ltr. drums.
Capacity: 34 l/min at 135 rpm.
Max. fluid temperature: 60°C (140°F).
Mounting: 2" BSP (M) bung adapter.
Thread inlet: 1" BSP (F).
Thread outlet: 3/4" BSP (F).
Materials: Steel, cast iron, buna rubber.
Max. viscosity: 1000 cSt (40°C).

Art.#	Outlet	Qty.
40191	Curved Discharge Spout	1
40191S	Curved Discharge Spout + 1m leading hose and elbow spout	1



40191

40191S

KABI Vægtstangspumpe

Pumpen med indbygget 1 1/2"R og 2"R adapter passer til 50-205 ltr. tromler. Velegnet til væsker som dieselolie, fyringsolie, petroleum, smørelolie, motorolie, gearolie og hydraulikolie.
Kapacitet: op til 300 ml pr. slag.
Montering: 1 1/2"R og 2"R (udv.) adapter.
Udløb: Bukket udløbsrør.
Pakning: NBR.
Materialer: Stål, aluminium, zink, messing.
Max. viskositet: SAE 90.

Art.nr. Emb.

40179 1

KABI Lever action pump

The pump with built-in 1 1/2"BSP og 2"BSP adapter fits 50-205 ltr. drums. Ideal for liquids like diesel oil, heating oil, kerosene, lubricating oil, engine oil, gear oil and hydraulic oil.
Capacity: up to 300 ml per stroke.
Mounting: 1 1/2"BSP and 2"BSP (M) adapter.
Outlet: Curved Discharge Spout.
Gasket: NBR.
Materials: Steel, aluminium, Zinc, brass.
Max. viscosity: SAE 90.

Art.# Quantity

40179 1



KABI Oliepumpe med slange

Med variabel indstilling af pumpehåndtag for lette som tunge væsker. Indbygget spunsåbner.

Pumpehus: Støbt aluminium.
Pumpestempel: Stål.
Pumperør: Teleskoprør i stål.
Afgangsslange: 1,8 m. slange og udløbsrør.
Kapacitet: 0,23 ltr. pr. slag.
Tilslutning: 2"R fadforskruning f. 50-200 ltr.
Ydre diameter: Pumperør: ø25mm.
Udløbsrør: ø19mm.

Velegnet til: hydraulikolie, motorolie, dieselolie, petroleum, smørelolie, gearolie.

Art.nr. Emb.

40195 1

KABI Oil pump with hose

Variable setting of handle for light and heavy fluids. Incorporating a wrench.

Casing: Cast aluminum.
Piston: Steel.
Tube: Teleskopisk steel.
Outlet hose: 1.8 m. hose and outlet tube.
Capacity: 0.23 ltr. per stroke.
Thread: 2"BSP bung adapter f. 50-200 ltr.
Outer diameter: Pump tube: ø25mm.
Outlet tube: ø19mm.

Suitable for: hydraulic oil, motor oil, diesel oil, petroleum, lubricating oil, gear oil.

Art.# Quantity

40195 1



KABI Gearoliepumpe

Pumpen er en vægtstangsmodel forsynet med 1,2 mtr. slange med krum udløb ø12mm.
Kapacitet: 60 ml. pr. slag.

Art.nr. For diameter op til Emb.

40182 ø310mm (20-25 ltr.) 1

40183 ø406mm (50-60 ltr.) 1

samt 2"R fadforskruning

KABI Gear oil pump

This pump is a lever action pump.
With a 1,2 mtr. hose with curved outlet ø12mm.
Capacity: 60 ml. per stroke.

Art.# For diameters up to Quantity

40182 ø310mm (20-25 ltr.) 1

40183 ø406mm (50-60 ltr.) and 2"BSP bung adaptor 1



Oliepumpe monteret på 16 ltr. beholder

Beholderen er med pedal for modhold.
Velegnet til de fleste olier herunder gearolie.
Med slange og krum udløb ø16 mm.
Kapacitet: ca. 8-13 ltr./min.

Art.nr. Emb.

40184 1

Oil pump mounted to 16 ltr. container

The container has a pedal for backstop.
Ideal for many oils incl. gear oil.
Hose and curved outlet ø16 mm.
Capacity: approx. 8-13 ltr./min.

Art.# Quantity

40184 1



KABI Brændstofpumpe m. 2m antistatisk slange

Pumpehus: Støbejern.
 Pumpestempel: Grafit.
 Pumperør: Teleskoprør i stål med bundventil.
 Afgangsslange: 2 mtr. antistatisk slange og udløbsstuds med udløfter.
 Kapacitet: 0,3 ltr. pr. omdrejning.
 Tilslutning: 2"R fadforskrining f. 50-200 ltr.

Velegnet til: benzin, olie, petroleumsprodukter, dieselolie. Pumpen er ikke ATEX godkendt.
 Må ikke bruges til vandbaserede og alkaliske væsker.

Art.nr. Emb.
 40194 1

KABI Rotary fuel pump with 2m anti-static hose

Casing: Cast iron.
 Piston: Graphite.
 Tube: Telescopic tube in steel with foot valve.
 Outlet hose: 2 mtr. anti-static hose and outlet spout with vent.
 Capacity: 0.3 ltr. per round.
 Thread: 2" BSP bung adapter f. 50-200 ltr.

Suitable for: gasoline, oil, petroleum products, diesel oil. The pump is not ATEX approved.
 Do not use for waterbased and alkaline fluids.

Art.# Quantity
 40194 1

**Enkeltvirkende vægtstangpumpe**

Håndbetjent vægtstangpumpe i rustfrit stål til brug for brændbare og let antændelige medier. Indbygget flammetilbageslagssikring der forhindrer flamme flashback. Kraftige limninger og jordledere forhindrer statisk ladning. Ledninger er fastgjort med låsemøtrik og har kraftige krokodillenæb. Pumpehus af rustfrit stål (AISI 316) og stempel og flangetætninger i PTFE. Udløbstud med dråbefang. 2 delt sugerør til brug for 50-200 ltr. tromler. Fadforskrining: 2"R.

Kapacitet: ca. 4 ltr./min. – 0,06 ltr. pr. slag.
 Velegnet til: benzin, diesel, petroleum, lak, fortynder, acetone, benzen, naphtha, Urea, AdBlue mm.

Art.nr. Emb.
 40200 1

Lever action pump

Hand operated pump in stainless steel for use with combustible and flammable media. Built-in internal flame arrestor prevents flame flashback. Heavy-duty bonding and grounding wires prevent hazardous static charge. Wires are secured by locknut and have heavy-duty alligator clips. Pump body made from stainless steel (AISI 316) with PTFE piston and PTFE sealing gasket.

Bung adaptor: 2" BSP.

Capacity: approx. 4 ltr./min. – 0.06 ltr. per stroke.
 Suitable for: gasoline, kerosene, lacquer, thinners, acetone, benzene, naphtha, Urea, AdBlue etc.

Art.# Quantity
 40200 1

**Semi-roterende Vingepumpe**

Pumpen er en "semi-rotationsmodel".

Pumpehus: Støbejern.
 Pumpestempel: Messing, inkl. flange og modflange.
 Løftehøjde: ca. 20 m – heraf 7 m sugehøjde.
 Velegnet til f.eks. benzin, vand, olie.

Art.nr.	Model	Tilslutning	Kapacitet	Emb.
40018	K0	1/2"R	11,50 l/min	1
40020	K1	3/4"R	17,25 l/min	1
40025	K2	1"R	22,50 l/min	1
40030	K3	1 1/4"R	29,00 l/min	1

Semi-rotary Wing pump

The pump is a "semi-rotary-model".

Casing: Cast iron.
 Piston: Brass, incl. flange & mating flange.
 Lifting height: approx. 20 m – 7 m suction height.
 Suitable for: gasoline, water, oil.

Art.#	Model	Connection	Capacity	Quantity
40018	K0	1/2" BSP	11,50 l/min	1
40020	K1	3/4" BSP	17,25 l/min	1
40025	K2	1" BSP	22,50 l/min	1
40030	K3	1 1/4" BSP	29,00 l/min	1

**KABI 2"R fadforskrining med støvhætte**

Art.nr. Emb.
 40713 1

KABI 2" BSP drum bung with dust cover

Art.# Quantity
 40713 1

**KABI 3-delt sugerør med 1"R**

Art.nr. Emb.
 40714 1

KABI 3-part suction tube 1" BSP

Art.# Quantity
 40714 1



KABI Adapterer

KABI tilbyder en omfattende serie af adaptore, der passer på mange fad- og tromlepumper. Det er således underordnet om væsken leveres i plast eller ståltromle på 60 liter eller 200 liter.

Art.nr.	Gevind
96030	2" R. Indv. – Mauser Udv.
96031	2" R. Indv. – Trisure Udv.
96032	2" R. Indv. – Din 61 Indv.
96033	2" R. Indv. – Din 51 Indv.
96034	2" R. Indv. – 63 mm Indv.
96035	2" R. Indv. – Din 71 Indv.
96036	2" R. Indv. – Din 61 Udv.
96037	Mauser Indv. – Trisure Udv.
96038	2" R. Udv. – Din 61 Udv.
96040	M56x4 Indv. – M70x6 Udv.
96041	2" R. Udv. – M56x4 Indv.
96042	2" R. Indv. – 2" R. Udv.

KABI Adapters

KABI offers an extensive series of adapters, which fits many grease supply systems and drum pumps.

Art.#	Thread
96030	2" BSP (F) – Mauser (M)
96031	2" BSP (F) – Trisure (M)
96032	2" BSP (F) – Din 61 (F)
96033	2" BSP (F) – Din 51 (F)
96034	2" BSP (F) – 63 mm (F)
96035	2" BSP (F) – Din 71 (F)
96036	2" BSP (F) – Din 61 (M)
96037	Mauser (F) – Trisure (M)
96038	2" BSP (M) – Din 61 (M)
96040	M56x4 (F) – M70x6 (M)
96041	2" BSP (M) – M56x4 (F)
96042	2" BSP (F) – 2" BSP (M)



Låg til dunk med 3/4"R (indv.) tilslutning

Passer til standard dunke. Låget har et 3/4"R (indv.) gevind i midten, så man kan tilslutte en hane.

Art.nr.	Gevind	Emb.
96132	DIN 51 Indv. – 3/4"R Indv.	1
96131	DIN 61 Indv. – 3/4"R Indv.	1
96133	DIN 71 Indv. – 3/4"R Indv.	1

Lid for drum with 3/4"BSP (F) connection

Fits standard plastic containers. This lid has a 3/4"BSP (F) thread, for connecting a faucet.

Art.#	Thread	Quantity
96132	DIN 51 (F) – 3/4"R (F)	1
96131	DIN 61 (F) – 3/4"R (F)	1
96133	DIN 71 (F) – 3/4"R (F)	1



Spunsnøgle for dunke

For DIN 51-61-71 + 2" spuns.

Art.nr.	Emb.
41172	1

Drum Wrench in reinforced Nylon

For DIN 51-61-71 + 2" bung.

Art.#	Quantity
41172	1



KABI Spuns og adaptornøgle

Alt-i-én.

Art.nr.	Emb.
41173	1

KABI Wrench

"All-in-one".

Art.#	Quantity
41173	1



Universal adapter

Art.nr.	Størrelse	Emb.
96183	2"R/ø38	1
40191A	2"R/ø32,5	1

Universal adapter

Art.#	Size	Quantity
96183	2"BSP(M)/ø38(F)	1
40191A	2"BSP(M)/ø32,5(F)	1



Adapter for olie- og fedtpumper

Art.nr.	Størrelse	Emb.
96230	2"R/ø30	1

Adapter for oil- and grease pumps

Art.#	Size	Quantity
96230	2"BSP(M)/ø30(F)	1



El-pumpe FTI-EF 230V

Velegnet til pumpning af kemikalier, syrer, baser, tynde olier m.m. i dunke, tromler og palletanke. Motoren leveres inkl. 3,5 m ledning med netstik. Pumperøret er forsynet med 3/4" slangestuds.

Flow (max.): 64 ltr./min.

Løftehøjde (max): 6 meter.

Vægtfylde (max): 1,6 kg/liter.

Viskositet (max): 300 cPs.

Temp. (max): +71°C (PVDF) / +100°C (SS316).

Motor: 230V/50HZ.

2-trins regulering 8.000 / 14.000 o/min.

IP24 kapsling.

Art.nr.	Pumperør	Materiale	Emb.
40273	ø33 x 690mm	PVDF/INCONEL	1
40276	ø33 x 1020mm	PVDF/INCONEL	1
40277	ø32 x 690mm	SS316/SS316	1
40278	ø32 x 1020mm	SS316/SS316	1

Slangesæt med pistol f/ETI-EF

2 mtr. 3/4" slange, V2A spændebånd og aftapningspistol i PP.

Art.nr.	Emb.
40238	1

Electric pump FTI-EF 230V

For pumping chemicals, acids, bases, thin oils, etc. from cans, drums and IBCs. The Motor comes with 3.5 m cord and 230V plug. The suction tube is equipped with 3/4" hose connector.

Output (max.): 64 ltr./min.

Lift height (max): 6 meters.

Weight (max): 1,6 kg / liter.

Viscosity (max): 300 cPs.

Temp. (Max): +71°C (PVDF) / +100°C (SS316).

Motor: 230V/50HZ.

2-step motor 8.000 / 14.000 Rpm.

IP24 enclosure.

Art.#	Suction tube	Material	Quantity
40273	ø33 x 690mm	PVDF/INCONEL	1
40276	ø33 x 1020mm	PVDF/INCONEL	1
40277	ø32 x 690mm	SS316/SS316	1
40278	ø32 x 1020mm	SS316/SS316	1

Hose with nozzle f/ETI-EF

2 mtr. 3/4" hose, V2A clamp and nozzle in PP.

Art.#	Quantity
40238	1

**El-pumpe FTI-PF 230V**

Samme gode kvalitet som FTI-EF pumpen, men denne er kraftigere og tåler sågar 1/2 times tørløb. Motoren leveres med 3,5 m ledning og klarer kontinuerlig drift – da den er forsynet med termosikring, manuel reset og indvendig køleblæser. Pumperøret er forsynet med 1" slangestuds. Ved pumpning af brændbare væsker skal der anvendes eksplosionsbeskyttede motorer og pumperør af rustfrit stål samt beskyttelsessæt mod statisk elektricitet.

Flow (max.): 150 ltr./min.

Løftehøjde (max): 24 meter.

Vægtfylde (max): 1,8 kg/liter.

Viskositet (max): 500 cPs.

Temp. (max): +49°C (PVDF) / +71°C (PP) / +105°C (SS316).

Motor: 230V/50HZ.

Regulerbare omdrejningstal 3.500 - 10.000 o/min.

IP 24 kapsling.

Art.nr.	Pumperør	Materiale	Emb.
40259	ø51 x 690mm	PP/INCONEL	1
40269	ø51 x 1000mm	PP/INCONEL	1
40279	ø51 x 690mm	PVDF/INCONEL	1
40289	ø51 x 1000mm	PVDF/INCONEL	1
40291	ø51 x 690mm	SS316/SS316	1
40292	ø51 x 1000mm	SS316/SS316	1

Slangesæt med pistol f/FTI-PF

2 mtr. 1" slange, V2A spændebånd og aftapningspistol i PP.

Art.nr.	Emb.
40239	1

Electric pump FTI-PF 230V

Same good quality as the FTI-EF type pump, but this is stronger and can withstand even 1/2 hour of dry running. The motor comes with 3.5 m cord and handles continuous operation – as it is equipped with thermal protection, manual reset and internal cooling fan. The suction tube has a 1" hose connector. If pumping flammable liquids explosion-proof motors, suction tubes of Stainless steel as well as a protection Kit against static electricity, must be used.

Flow (max.): 150 ltr./min.

Lift height (max): 24 meters.

Weight (max): 1.8 kg / liter.

Viscosity (max): 500 cPs.

Temp. (max): +49°C (PVDF) / +71°C (PP) / +105°C (SS316).

Motor: 230V/50HZ.

Adjustable speed 3.500 - 10.000 Rpm.

IP 24 enclosure.

Art.#	Suction tube	Material	Quantity
40259	ø51 x 690mm	PP/INCONEL	1
40269	ø51 x 1000mm	PP/INCONEL	1
40279	ø51 x 690mm	PVDF/INCONEL	1
40289	ø51 x 1000mm	PVDF/INCONEL	1
40291	ø51 x 690mm	SS316/SS316	1
40292	ø51 x 1000mm	SS316/SS316	1

Hose with nozzle f/FTI-PF

2 mtr. 1" hose, V2A clamp and nozzle in PP.

Art.#	Quantity
40239	1



PP: Vand, aggressive væsker, eddikesyre, myresyre, salpetersyre, svovlsyre, ætsemidler, salte, destilleret vand, lud, boreemulsion, hydraulikolie, fixer, fremkalder, insekt- og ukrudtsmiddel, fortyndet lim, sæbeopløsninger og gødningsopløsninger. **PVDF:** Flusssyre, salpetersyre, koncentreret svovlsyre og saltsyre, kromsyre, jernklorid, kongevand og blegevand. **AI316:** Varmt vand, opløsningsmidler, acetone, renset benzin, kromsyre, smøreløse, sprøjteegnede lakker, paraffin, frugtsafter, flydende sæber, milde ætsende væsker, organisk syre, dieselolie, brændbare væsker.

PP: water, aggressive liquids, acetic acid, formic acid, nitric acid, sulfuric acid, etchants, salts, distilled water, lye, boreemulsion, hydraulic oil, fixer, developer, insect and herbicide diluted glue, soap solutions and fertilizer solutions. **PVDF:** hydrofluoric acid, nitric acid, concentrated sulfuric acid and hydrochloric acid, chromic acid, ferric chloride, aqua regia and bleach. **AI316:** Hot water, solvents, acetone, gasoline, chromic acid, lubricating oils, spray suitable varnishes, paraffin, fruit juices, liquid soaps, mild caustics, organic acid, diesel fuel, flammable liquids.

Wanner oliestandsglas 601 - aluminium

Oliestandsglas i aluminium med reflektorskive.
Oliestandsglasset er forsynet med naturglas og
NBR O-ring samt fiberpakning.
Min./max. temperatur: -20 / +100°C.
Tryksikkert op til 4 bar.

Art.nr.	Gevind	Emb.
21245	1/4"R	1
21250	3/8"R	1
21255	1/2"R	1
21260	3/4"R	1
21265	1"R	1
21270	1 1/4"R	1
21275	1 1/2"R	1
21280	2"R	1

Wanner oil level window 601 - aluminium

Oil level window in aluminium with reflector. The oil
level window is equipped with natural glass and
NBR O-ring. Tread seal with Tesnit ring.
Min./max. temperature: -20 / +100°C.
Max. operating air pressure: 4 bar.

Art.#	Thread	Quantity
21245	1/4"BSP	1
21250	3/8"BSP	1
21255	1/2"BSP	1
21260	3/4"BSP	1
21265	1"BSP	1
21270	1 1/4"BSP	1
21275	1 1/2"BSP	1
21280	2"BSP	1

**Oliestandsglas model 240**

Tryksikker op til 1 bar.
KS: Polyamid PA6, varmebestandig op til +120°C.
GE: Polyacryl, varmebestandig op til +70°C.

Art.nr.	Gevind	Type	Emb.
22155	M12x1,5	KS	1
22160	M16x1,5	KS	1
22165	M20x1,5	GE	1
22170	M24x1,5	KS	1
22175	M26x1,5	GE	1
22180	M27x1,5	KS	1
22185	M30x1,5	KS	1
22190	M33x1,5	GE	1
22198	M36x1,5	KS	1
22200	M42x1,5	GE	1
22205	M48x1,5	GE	1

Oil level window model 240

Pressure resistant up to 1 bar.
KS: Polyamide PA6, heat resistant up to +120°C.
GE: Polyacrylic, heat resistant up to +70°C.

Art.#	Thread	Type	Quantity
22155	M12x1.5	KS	1
22160	M16x1.5	KS	1
22165	M20x1.5	GE	1
22170	M24x1.5	KS	1
22175	M26x1.5	GE	1
22180	M27x1.5	KS	1
22185	M30x1.5	KS	1
22190	M33x1.5	GE	1
22198	M36x1.5	KS	1
22200	M42x1.5	GE	1
22205	M48x1.5	GE	1



KS



GE

Oliestandsglas model 240/KS - polyamid PA6

Varmebestandig op til +120°C
og tryksikker op til 1 bar.

Art.nr.	Gevind	Emb.
22110	1/4"R	1
22115	3/8"R	1
22120	1/2"R	1
22125	3/4"R	1
22130	7/8"R	1
22135	1"R	1
22140	1 1/4"R	1
22145	1 1/2"R	1
22150	2"R	1

Oil level window model 240/KS - polyamide PA6

Heat resistant up to +120°C and
pressure resistant up to 1 bar.

Art.#	Thread	Quantity
22110	1/4"BSP	1
22115	3/8"BSP	1
22120	1/2"BSP	1
22125	3/4"BSP	1
22130	7/8"BSP	1
22135	1"BSP	1
22140	1 1/4"BSP	1
22145	1 1/2"BSP	1
22150	2"BSP	1



Oliestandsglas model 240/TH - messing

Oliestandsglas i messing med reflektorskive. Oliestandsglas er forsynet med naturglas, NBR O-ring samt pakning. Varmebestandig op til +120°C.

Art.nr.	Gevind	Emb.
22218	1/4"R	1
21450	3/8"R	1
22212	1/2"R	1
22213	3/4"R	1
22219	1 1/4"R	1
22211	M20x1,5	1
22214	M26x1,5	1
22217	M36x1,5	1

Oil level window model 240/TH - brass

Oil level window in brass with reflector. The oil level window is equipped with natural glass, NBR O-ring and gasket. Heat resistant up to +120°C.

Art.#	Thread	Quantity
22218	1/4"BSP	1
21450	3/8"BSP	1
22212	1/2"BSP	1
22213	3/4"BSP	1
22219	1 1/4"BSP	1
22211	M20x1.5	1
22214	M26x1.5	1
22217	M36x1.5	1

**Oliestandsplade model 245**

Oliestandsplade af højglans galvaniseret stål. Hvid PP-reflektor samt perbunan pakning. Varmebestandig op til +120°C.

Art.nr.	Størrelse	Emb.
22272	48x30mm	1
22274	60x30mm	1
22278	100x40mm	1
22280	125x40mm	1
22282	160x48mm	1

Oil level plate model 245

Oil level plate of high-gloss galvanized steel. White PP-reflector and perbunan gasket. Heat resistant up to +120°C.

Art.#	Size	Quantity
22272	48x30mm	1
22274	60x30mm	1
22278	100x40mm	1
22280	125x40mm	1
22282	160x48mm	1

**Oliestandsviser model 222 90° Vinkel**

Vinkeløbende oliestandsviser af messing med glastrør. Renseskrue og kontramøtrik. Varmebestandig op til +80°C.

Art.nr.	Gevind x Længde	Emb.
20030	1/8"R x 100mm	1
20040	1/8"R x 150mm	1
20050	1/8"R x 200mm	1
20130	1/4"R x 100mm	1
20140	1/4"R x 150mm	1
20150	1/4"R x 200mm	1
20230	3/8"R x 100mm	1
20235	3/8"R x 125mm	1
20240	3/8"R x 150mm	1
20250	3/8"R x 200mm	1
20330	1/2"R x 100mm	1
20335	1/2"R x 125mm	1
20340	1/2"R x 150mm	1
20245	3/8"R x 175mm	1
20350	1/2"R x 200mm	1
20360	1/2"R x 300mm	1
20375	3/4"R x 150mm	1

Oil level indicator 90° angular model 222

Angled oil level indicator of brass with glass tube. With cleaning screw. Fixed screw-in fitting and locknut. Heat resistant up to +80°C.

Art.#	Thread x Length	Quantity
20030	1/8"BSP x 100mm	1
20040	1/8"BSP x 150mm	1
20050	1/8"BSP x 200mm	1
20130	1/4"BSP x 100mm	1
20140	1/4"BSP x 150mm	1
20150	1/4"BSP x 200mm	1
20230	3/8"BSP x 100mm	1
20235	3/8"BSP x 125mm	1
20240	3/8"BSP x 150mm	1
20250	3/8"BSP x 200mm	1
20330	1/2"BSP x 100mm	1
20335	1/2"BSP x 125mm	1
20340	1/2"BSP x 150mm	1
20245	3/8"BSP x 175mm	1
20350	1/2"BSP x 200mm	1
20360	1/2"BSP x 300mm	1
20375	3/4"BSP x 150mm	1



Andre størrelser kan skaffes på forespørgsel.

Other sizes are available on request.

Oliestandsviser model 226 Ligeløbende

Ligeløbende oliestandsviser af messing med glastrør. Varmebestandig op til +80°C.

Art.nr.	Gevind x Længde	Emb.
20771	1/8"R x 100mm	1
20772	1/8"R x 150mm	1
20774	1/8"R x 200mm	1
20768	1/4"R x 100mm	1
20766	1/4"R x 150mm	1
20767	1/4"R x 200mm	1
20777	3/8"R x 100mm	1
20778	3/8"R x 150mm	1
20779	3/8"R x 200mm	1
20773	1/2"R x 100mm	1
20770	1/2"R x 125mm	1
20781	1/2"R x 150mm	1
20775	1/2"R x 200mm	1
20782	3/4"R x 150mm	1
20783	3/4"R x 200mm	1

Oil level indicator straight model 226

Straight tube of brass with glass tube. Heat resistant up to +80°C.

Art.#	Thread x Length	Quantity
20771	1/8"BSP x 100mm	1
20772	1/8"BSP x 150mm	1
20774	1/8"BSP x 200mm	1
20768	1/4"BSP x 100mm	1
20766	1/4"BSP x 150mm	1
20767	1/4"BSP x 200mm	1
20777	3/8"BSP x 100mm	1
20778	3/8"BSP x 150mm	1
20779	3/8"BSP x 200mm	1
20773	1/2"BSP x 100mm	1
20770	1/2"BSP x 125mm	1
20781	1/2"BSP x 150mm	1
20775	1/2"BSP x 200mm	1
20782	3/4"BSP x 150mm	1
20783	3/4"BSP x 200mm	1



Andre størrelser kan skaffes på forespørgsel.

Other sizes are available on request.

Olje-drypsmørekopper type "ELO"

Til automatisk dråbedosering af olie eller andre væsker. Dosering af væsker sker dråbe for dråbe, forudsat at væsken ikke blandes med faste partikler eller væsker der fortykkes af varme. Vær opmærksom på om væsken er kompatibel med plexiglas beholderen og NBR pakninger. Den kan evt. skaffes med naturglas og FKM pakninger. Drypsmørekoppens magnetventil kan styres ved hjælp af maskinens styrestrøm eller andet kredsløb. Beskyttelsesklasse: IP20 med kabelstik. Tilslutningsgevind: 1/2"R. Indvendig tilslutningsgevind: 1/8"R.

Art.nr.	Model	Størrelse	Volt	Emb.
11520	ELO500	ø80x200	220V	1
11525	ELO1000	ø100x240	220V	1
11530	ELO2000	ø133x285	220V	1
11521	ELO500	ø80x200	24V DC	1
11526	ELO1000	ø100x240	24V DC	1
11531	ELO2000	ø133x285	24V DC	1

Oil drip lubricator type "ELO"

For automatic drop dosing of oil or other liquids. Dosing of liquids is done drop by drop, provided that the liquid is not mixed with solid particles or liquids thickened by heat. Make sure that the liquid is compatible with the container in plexiglass and with NBR gaskets. Available with natural glass and with FKM gaskets. The drip lubrication cup solenoid valve can be controlled by means of e.g. the control current or other circuit of the machine. Protection class: IP20 with cable connector. Connection thread: 1/2"BSP. Internal connection thread: 1/8"BSP.

Art.#	Model	Size	Volt	Quantity
11520	ELO500	ø80x200	220V	1
11525	ELO1000	ø100x240	220V	1
11530	ELO2000	ø133x285	220V	1
11521	ELO500	ø80x200	24V DC	1
11526	ELO1000	ø100x240	24V DC	1
11531	ELO2000	ø133x285	24V DC	1

**Olje-drypsmørekop type "UST"**

Beholder af plexiglas og med NBR pakninger. Med justerbar aksel for præcis dosering af væsken. Visuel kontrol af dryp. Det fjederbelastede påfyldningslåg gør beholderen støv- og stænkstæt. Åben/luk-funktion. Temperatur: -30°C til +80°C.

Art.nr.	Størrelse	Tilslutning	Indhold	Emb.
11505	ø30x97	1/8"R	20ml	1
11508	ø30x97	1/4"R	20ml	1
11512	ø40x110	1/4"R	35ml	1
11513	ø40x110	3/8"R	35ml	1
11514	ø50x126	1/4"R	84ml	1
11516	ø60x140	3/8"R	140ml	1
11517	ø60x140	1/4"R	140ml	1

Oil drip feeder type "UST"

Container made of plexiglas and with NBR gaskets. These oilers have shut-off control and needle valve oil feed adjustment. Instantaneous shutting-off, dust and splash-proof design with hinged cover. On/off switch. Temperature: -30°C til +80°C.

Art.#	Size	Connection	Capacity	Quantity
11505	ø30x97	1/8"BSP	20ml	1
11508	ø30x97	1/4"BSP	20ml	1
11512	ø40x110	1/4"BSP	35ml	1
11513	ø40x110	3/8"BSP	35ml	1
11514	ø50x126	1/4"BSP	84ml	1
11516	ø60x140	3/8"BSP	140ml	1
11517	ø60x140	1/4"BSP	140ml	1

**Olje-drypsmørekop type "UNI"**

Beholder af plexiglas og med NBR pakninger. Med justerbar aksel for præcis dosering af væsken. Visuel kontrol af dryp. Stor åbning for påfyldning af væske under den røde støvhætte. Åben/luk-funktion. Temperatur: -30°C til +80°C.

Art.nr.	Størrelse	Tilslutning	Indhold	Emb.
11450	ø50x110	1/4"R	84ml	1
11460	ø60x120	3/8"R	140ml	1
11480	ø80x160	1/2"R	500ml	1
11495	ø100x195	1/2"R	1000ml	1

Oil drip feeder type "UNI"

Container made of plexiglas and with NBR gaskets. These oilers have shut-off control and needle valve oil feed adjustment. A sight chamber is provided to check the oil flow drip rate. On/off switch. Temperature: -30°C to +80°C.

Art.#	Size	Connection	Capacity	Quantity
11450	ø50x110	1/4"BSP	84ml	1
11460	ø60x120	3/8"BSP	140ml	1
11480	ø80x160	1/2"BSP	500ml	1
11495	ø100x195	1/2"BSP	1000ml	1

**Oljebeholder**

Oliereservoir for f.eks. olie, bremsevæske og lignende medier. Beholderen er af plexiglas og er varmebestandig op til +70°C.

Art.nr.	Størrelse	Tilslutning	Indhold	Emb.
11310	ø40x70	1/4"R	36ml	1
11313	ø50x88	3/8"R	84ml	1
11315	ø60x97	1/4"R	140ml	1
11316	ø80x128	1/4"R	500ml	1
11318	ø100x148	1/4"R	1000ml	1
11320	ø133x180	1/4"R	2000ml	1

Oil reservoir

Oil reservoir for such as oil, brake fluid and similar media. The container is of plexiglas and is heat resistant up to +70°C.

Art.#	Size	Connection	Capacity	Quantity
11310	ø40x70	1/4"BSP	36ml	1
11313	ø50x88	3/8"BSP	84ml	1
11315	ø60x97	1/4"BSP	140ml	1
11316	ø80x128	1/4"BSP	500ml	1
11318	ø100x148	1/4"BSP	1000ml	1
11320	ø133x180	1/4"BSP	2000ml	1



Oliekopper type "Constant Level"

Af cadmieret stål med beholder af transparent plexiglas – for sikring af konstant oliestand. Varmebestandig op til +65°C.

Art.nr.	Model	Tilslutning	Indhold	Emb.
11585	CL7563	1/8"R	85ml	1
11591	CL7581	1/4"R	115ml	1

Som ovenfor, men med krop af legeret stål.

Art.nr.	Model	Tilslutning	Indhold	Emb.
11590	CL7572	1/4"R	115ml	1

Constant Level with plexiglas

With cadmium-plated steel container and transparent plexiglas – to ensure constant oil level. Heat resistant up to +65°C.

Art.#	Model	Connection	Contents	Quantity
11585	CL7563	1/8"BSP	85ml	1
11591	CL7581	1/4"BSP	115ml	1

As above, but with a body of alloy steel.

Art.#	Model	Connection	Contents	Quantity
11590	CL7572	1/4"BSP	115ml	1



Som ovenfor, men med udskiftelig beholder af natur-glas. Varmebestandig op til +100°C.

Art.nr.	Model	Tilslutning	Indhold	Emb.
11595	CL7595	1/4"R	120ml	1

Art.nr.	Tilbehør for CL7595	Emb.
11596	Løse glas	1
11597	Pakning	1
11598	Beskyttelsesgitter	1

As above, but with a replaceable container of natural glass. Heat resistant up to +100°C.

Art.#	Model	Connection	Contents	Quantity
11595	CL7595	1/4"BSP	120ml	1

Art.#	Accessories for CL7595	Quantity
11596	Spare filters	1
11597	Gasket	1
11598	Protective grid	1

**Oliepensler SPR for drypsmøring**

Oliepenselen er af messing med børstehår af nylon. Den er anvendelig op til +100°. Ved højere temperatur anvendes bronzemateriale (+200°) eller rustfri (+300°).

Børsten fastholder olien som en svamp, hvorved klat-smøring undgås.

Art.nr.	Model	Størrelse	Tilslutning	Emb.
11368	SPR	ø6,5mm	1/8"R	1
11369	SPR	ø16mm	1/8"R	1
11370	SPR	ø25mm	1/8"R	1
11374	SPF	Flad 57mm	1/8"R	1

Oil Brushes SPR for dripping lubrication

Oliebrushes is of brass bristles of nylon. It can be used up to 100°C. At higher temperatures, use bronze material (+200°C) or stainless steel (+300 °C). The brush maintains the oil like a sponge, which optimizes the lubrication.

Art.#	Model	Size	Connection	Quantity
11368	SPR	ø6,5mm	1/8"BSP	1
11369	SPR	ø16mm	1/8"BSP	1
11370	SPR	ø25mm	1/8"BSP	1
11374	SPF	Flat 57mm	1/8"BSP	1



11370

11374

Roterende olieborste RSM

Roterende børste for smøring af kæder, conveyor m.m. Anvendes også som rengøringsbørste på stærkt snavsede kæder.

Art.nr.	Model	Størrelse	Tilslutning	Emb.
11371	RSM	ø80 x 25	1/8"R	1

Art.nr.	Tilbehør for 11371	Emb.
11373	Løse børster	1

Rotating oil brush RSM

Rotating brush for lubrication of chains, conveyor etc. Also used as cleaning brush on heavily dirty chains.

Art.#	Model	Size	Connection	Quantity
11371	RSM	ø80 x 25	1/8"BSP	1

Art.#	Accessories for 11371	Quantity
11373	Spare brushes	1



Trykluftdrevet suge/tømme pumpe

Pumpen er en dobbeltvirkende pumpe der både kan suge og tømme, ved blot at skrue på en enkelt knap. Den bliver fortrinsvis brugt til at tømme tanke, tromler og sumpe på maskiner. Den har brug for ca. 8 bar, hvorefter den kan tømme/suge ca. 50-60 ltr./min. Pumpen er inkl. sugerør, quick connectors, 3 meter sugeslange og stigerør.

Art.nr.	Emb.
CL0321000	1

Power Vac pump

It is a dual acting suction and pressure pump that uses compressed air. It is mainly used for filling and emptying lubricant and coolant tanks. It requires approx. 8 bars. This makes it possible to fill or empty approx. 50-60 ltr./min. The following accessories are included with the Power Vac Pump: Ascending pipe, Threaded barrel connector 2", Fast-action connector, Feed hose 3 m, Suction pipe.

Art.#	Quantity
CL0321000	1

**Maskintømmer**

Maskintømmeren anvendes til at tømme maskinsumpe, tømme tanke, lænse fra både og fartøjer, samt mange andre opgaver direkte over i et standard fad (excl.). Maskintømmeren har ingen bevægelige dele. Sættet består af vacuumpumpe (for 3/4"R hullet), overfyldningsventil, udstyr til opugning såsom slange, fittings og mundstykke (for 2"R hullet).

Kapacitet ved vand 95 ltr./min. – ved 7bar.
Kapacitet ved SAE30 olie 70 ltr./min. – ved 7bar.

Art.nr.	Emb.
40920	1

Vacuum Fluid Extractor

The fluid extractor is used to empty machine sumps, empty tanks, bilge from boats and vessels as well as many other tasks directly into a standard drum (excl.). The fluid extractor has no moving parts. The kit consists of a vacuum pump (for 3/4" BSP-hole), overfill protection, equipment to pick up such as hose, fittings and vacuum head (for 2" BSP hole).

Output if water 95 ltr./min. – at 7bar.
Output if SAE30 oil 70 ltr./min. – at 7bar.

Art.#	Quantity
40920	1

Lev. excl. fad
Drum not incl.

**KABI Doseringspumpe**

KABI Doseringspumpe har en speciel funktion, der gør det muligt at justere blandingsforholdene mens den er i brug. Alle KABI Doseringspumper har et separat blandingskammer. Dette gør det muligt at undgå kemisk kontakt med pumpe motoren, hvilket igen giver en længere levetid for produktet og en fremragende blandingsproces. KABI Doseringspumpe leveres med et vægbeslag, en sugeslange med integreret filter og et sæt reservedele.

Art.nr.	Arbejdsdruk	Mængde	Blandingsforh.
KA2200/10	1,0 - 4,5 bar	2200 ltr./t	2,0 - 10,0%
KA2700/5	0,5 - 9,5 bar	2700 ltr./t	1,0 - 5,0%

Bemærk:

KA2200/10 skal køre med en mængde på mindst 2 liter i timen for at virke korrekt.

KABI Piston Mixer

The KABI Piston mixer has a special feature, which makes it possible to adjust the mixing ratio during operations. All of the Piston mixers have a separate mixing chamber, which makes it possible to avoid chemical contact with the motor piston. The KABI Piston mixer is only driven by the water pressure. Comes with a wall bracket, a suction hose with integrated dirt strainer and a set of spare parts.

Art.#	Work pressure	Capacity	Mixing range
KA2200/10	1.0 - 4.5 bar	2200 ltr./h	2.0 - 10.0%
KA2700/5	0.5 - 9.5 bar	2700 ltr./h	1.0 - 5.0%

Note:

KA2200/10 must run at least 2 litres per hour to work properly.

**KABI Væskemixer 0-10%**

Væskemixeren sikrer en nøjagtig og ensartet blanding, når koncentrerede kølesmøremidler skal blandes op med vand. Kan også bruges til væsker som sprinklervæske, frostvæske, IPA sprit mm. Mixeren drives kun af trykket fra vandforsyningen. Kan bruges på 200 ltr. tromler og helt ned til 20 ltr. dunke. Sugerøret af plast kan tilskræres så det passer til tromlens eller dunkens højde. Den er forsynet med 2 stk. tilbageløbsventiler, som sikrer imod tilbageløb af væske mod vandtilslutningen. Trinløs variabel indstilling af doseringsventil og kan også justeres under selve processen. Vandtilslutning: 1/2"R. Fadforskrining: 2"R.

Art.nr.	Mængde	Blandingsforh.	Emb.
KA1000-10	1000 ltr./t	0-10%	1

KABI Liquid mixer 0-10%

The Liquid Mixer ensures accurate and uniform blending when concentrated metal cutting fluids and coolants must be mixed with water. Also usable for liquids like windscreen washer fluid, antifreeze, IPA isopropyl alcohol etc. The mixer is powered by the pressure from the water supply. It can be used on 200 ltr. drums down to 20 ltr. canisters. The plastic suction tube can be cut to fit the height of the drum or canister. Equipped with 2 non-return valves, to prevent back-flow of liquid. Stepless variable setting of the mixing valve and can also be adjusted during processing. Water connection: 1/2" BSP. Bung adapter: 2" BSP.

Art.#	Capacity	Mixing range	Quantity
KA1000-10	1000 ltr./h	0-10%	1



KABI Mobil Olie Skimmer

Dansk Design - CE godkendt.

- Aluminium skimmerhus 70mm x 70mm x 70mm.
- Strømforsyning 6W/24V AC 230V 50Hz.
- Let at installere / Let at fjerne.
- Kraftig magnet gør den ekstremt stabil at installere og bruge.
- Temperaturbestandige bånd (+200°C) i 30mm & 50mm bredde – standardlængde 600mm.

Art.nr.	Kapacitet	Emb.
KAO30	3 liter/time	1
KAO50	5 liter/time	1

KABI Portable Oil Skimmer

Danish design - CE approved.

- Housing in aluminum 70mm x 70mm x 70mm.
- Power Supply 6W/24V AC 230V 50Hz.
- Easy to install / Easy to remove.
- Powerful magnet makes it extremely stable to install and to operate.
- High temperature belts (+200°C) in 30mm & 50mm width – Standard length 600mm.

Art.#	Capacity	Quantity
KAO30	3 liter/hour	1
KAO50	5 liter/hour	1

**KABI Mobil Olie Skimmer med separator**

Dansk Design - CE godkendt.

- Separerer emulsion og olie op til 99%. De 2 separerede væsker udskilles via hver deres udløb.
- Støbt aluminiumshus.
- Strømforsyning 6W/24V AC 230V 50Hz.
- Let at installere / Let at fjerne.
- Kraftig magnet gør den ekstremt stabil at installere og bruge.
- Temperaturbestandige bånd (+200°C) 30mm bredde – standardlængde 720mm.

Art.nr.	Kapacitet	Emb.
KAO30S	3 liter/time	1

KABI Mobil Oil Skimmer with separator

Danish design - CE approved.

- Separates emulsion and oil up to 99%. Emulsion & oil are separated through different discharges.
- Cast aluminum housing.
- Power supply 6W/24V AC 230V 50Hz.
- Easy to install / Easy to remove.
- Powerful magnet makes it extremely stable to install and use.
- Temperature resistant belt (+200 °C) 30mm width – standard length 720mm.

Art.#	Capacity	Quantity
KAO30S	3 liter/hour	1

**KABI Bånd til Olie Skimmer**

Art.nr.	Bredde / Omkreds	Emb.
KAO30/400	30mm/400mm	1
KAO30/600	30mm/600mm	1
KAO30/800	30mm/800mm	1
KAO30/1000	30mm/1000mm	1
KAO30/1200	30mm/1200mm	1
KAO30/1500	30mm/1500mm	1
KAO30/2000	30mm/2000mm	1
KAO50/400	50mm/400mm	1
KAO50/600	50mm/600mm	1
KAO50/800	50mm/800mm	1
KAO50/1000	50mm/1000mm	1
KAO50/1200	50mm/1200mm	1
KAO50/1500	50mm/1500mm	1
KAO50/2000	50mm/2000mm	1

KABI HPB Belts for Oil Skimmers

Art.#	Width / Circumference	Quantity
KAO30/400	30mm/400mm	1
KAO30/600	30mm/600mm	1
KAO30/800	30mm/800mm	1
KAO30/1000	30mm/1000mm	1
KAO30/1200	30mm/1200mm	1
KAO30/1500	30mm/1500mm	1
KAO30/2000	30mm/2000mm	1
KAO50/400	50mm/400mm	1
KAO50/600	50mm/600mm	1
KAO50/800	50mm/800mm	1
KAO50/1000	50mm/1000mm	1
KAO50/1200	50mm/1200mm	1
KAO50/1500	50mm/1500mm	1
KAO50/2000	50mm/2000mm	1



KABI Refraktometer AUTO

Håndholdt refraktometer til måling af koncentrationen af mange medier. Eks. sprinkervæske, frostvæske og batterisyre.

ATC (Automatic Temperature compensation), gør målingen hurtigere og nemmere.

Art.nr.	Emb.
KARA01	1

KABI Refractometer AUTO

Handheld refractometer for measuring the concentration of different media. Eg. washer fluid, anti freeze and battery acid.

ATC (Automatic Temperature compensation), makes the measuring faster and easier.

Art.#	Quantity
KARA01	1

**KABI Refraktometer Brix**

Håndholdt refraktometer til måling af koncentrationen af mange medier. Eks. køle-smøremiddel, flusmidler samt sukkerindholdet i diverse fødevarer. ATC (Automatic Temperature compensation), gør målingen hurtigere og nemmere.

Art.nr.	Måle interval	Emb.
KARB10	Brix 0-10%	1
KARB18-1	Brix 0-18%	1
KARB32	Brix 0-32%	1

KABI Refractometer Brix

Handheld refractometer for measuring the concentration of anti freeze media. Eg. coolants, fluxing agents and concentration of sugar in various foods. ATC (Automatic Temperature compensation), makes the measuring faster and easier.

Art.#	Measuring range	Quantity
KARB10	Brix 0-10%	1
KARB18-1	Brix 0-18%	1
KARB32	Brix 0-32%	1

**KABI Refraktometer Frostvæske samt IPA sprit**

Håndholdt refraktometer til måling af koncentrationen af frostvæske (Propylenglycol og Ethylen-glycol) samt IPA sprit 0-60%.

ATC (Automatic Temperature compensation), gør målingen hurtigere og nemmere. Er velegnet til servicering af jordvarmeanlæg.

Art.nr.	Måle interval	Emb.
KARIPA60-1	IPA 0-60% (-23°C) PG 0-60% (-48°C) EG 0-60% (-55°C)	1

KABI Refractometer Antifreeze and IPA alcohol

Handheld refractometer for measuring the concentration of anti freeze (propylene glycol and ethylene glycol) and IPA alcohol 0-60%.

ATC (Automatic Temperature compensation), makes the measuring faster and easier. Suitable for servicing geothermal systems.

Art.#	Measuring range	Quantity
KARIPA60-1	IPA 0-60% (-23°C) PG 0-60% (-48°C) EG 0-60% (-55°C)	1

**KABI Refraktometer AdBlue®**

Håndholdt refraktometer til måling af koncentrationen af AdBlue®.

ATC (Automatic Temperature compensation), gør målingen hurtigere og nemmere.

Art.nr.	Måle interval	Emb.
KARAB35	30-35%	1
KARAB40	0-40%	1

KABI Refractometer AdBlue®

Handheld refractometer for measuring the concentration of AdBlue®.

ATC (Automatic Temperature compensation), makes the measuring faster and easier.

Art.#	Measuring range	Quantity
KARAB35	30-35%	1
KARAB40	0-40%	1

**KABI Refraktometer Salt 0-28%**

Håndholdt refraktometer til måling af koncentrationen af salt.

ATC (Automatic Temperature compensation), gør målingen hurtigere og nemmere.

Art.nr.	Måle interval	Emb.
KARS28	0-28%	1

KABI Refractometer Salinity 0-28%

Handheld refractometer for measuring the concentration of salinity.

ATC (Automatic Temperature compensation), makes the measuring faster and easier.

Art.#	Measuring range	Quantity
KARS28	0-28%	1

**KABI Digitalt Refraktometer Brix / RI**

Håndholdt digitalt refraktometer til RI (Refractive Index) 1,3330-1,4200nD og Brix 0-50%. F.eks. til måling af køle-smøremiddel, flusmidler og sukkerindhold i diverse fødevarer.

Inkl. ATC (Automatic Temperature compensation).

Art.nr.	Måle interval	Emb.
KARBD50	Brix 0-50% R.I. 1,3330-1,4200nD	1

KABI Digital Refractometer Brix / RI

Handheld digital refractometer for RI (Refractive Index) 1,3330-1,4200nD and Brix 0-50%. Eg. for measuring coolants, fluxing agents and the concentration of sugar in various foods.

Incl. ATC (Automatic Temperature compensation).

Art.#	Measuring range	Quantity
KARBD50	Brix 0-50% R.I. 1,3330-1,4200nD	1



KABI Service Kuffert til MWF

Art.nr.

KASK1 (Basis indhold)

- 1 Thermometer til at bestemme prøvens temperatur
- 1 Plastik bæger med håndtag til udtagning af prøver 0,25 ltr.
- 3 Transparente plastik flasker med stor åbning til opbevaring af prøver 0,1 ltr.
- 1 Vedligeholdelsesplan

Art.nr. Basis indhold +

KASK6 Refraktometer 18% + Digitalt pH meter**KASK7 Refraktometer 32% + Digitalt pH meter****KABI MWF Care Case**

Art.#

KASK1 (Basic content)

- 1 Thermometer for determination of sample temperature
- 1 Plastic cup with handle for extraction of samples 0.25 ltr.
- 3 Transparent plastic bottles with large bottle opening for storing of samples 0.1 ltr.
- 1 Maintenance plan

Art.# Basic content +

KASK6 Refractometer 18% + Digital pH meter**KASK7 Refractometer 32% + Digital pH meter****KABI Digitalt Thermometer**

Med hukommelse af sidste måling.
Slukker automatisk efter 15 min. inaktivitet.
Skift mellem Celsius & Fahrenheit.

Art.nr. Emb.

KATD300 1**KABI Digital Thermometer**

With memory of last measuring.
Automatically shut down after 15 min of inactivity.
Sensor fault display and Switch between C & F.

Art.# Quantity

KATD300 1**KABI Digitalt pH meter**

Til måling af pH værdier i forskellige væsker. Leveres i hård plast boks sammen med 2 kalibreringsvæsker (1 flaske pH 4,003 og 1 flaske pH 6,864).
ATC (Automatic Temperature compensation), gør målingen hurtigere og nemmere.

Art.nr.	Interval	Nøjagtighed	Driftstemp.	Emb.
KAPHD14	pH 0-14	+/- 0,01	0-50°C	1

KABI Digital pH meter

For measuring of pH values in different fluids.
Comes in a hard plastic box incl. 2 bottles of calibration fluids (with pH 4.003 and pH 6.864).
ATC (Automatic Temperature compensation), which makes the measuring faster and easier.

Art.#	Range	Accuracy	Oper. temp.	Quantity
KAPHD14	pH 0-14	+/- 0.01	0-50°C	1

**KABI Gevind skære pasta 100 ml**

KABI pastaen er fremstillet af vand/sæbe og er meget velegnet til gevindskæring, stansning, fræsning og afkortning. Indeholder ej mineral olie, klor eller svovl. Efterlader ikke olieret overflade. Kan anvendes til alle metaller herunder også rustfrit stål.
Flammpunkt: >225°C.
Smeltepunkt: 32°C.
Neutral lugt.

Art.nr. Emb.

KA100100 1**KABI Thread cutting agent 100 ml**

The KABI paste is a paste based on water/soap and is ideally used for thread-cutting, tapping, centring, removing and milling. It does not contain mineral oil, chlorine or sulfur. Does not leave oily surface.
Suitable for all metals – incl. stainless steel.
Flash point: >225°C.
Melting point: 32°C.
Neutral odour.

Art.# Quantity

KA100100 1

Ariana Cool line repræsenterer det mest komplette modulsystem på markedet. Eneste modulsystem på markedet, som er kompatibelt med 80% af konventionelle systemer uden nogen adaptere. Cool line-produkter er lavet af høj kvalitet Hostaform plastpellets, hvilket gør dem mere modstandsdygtige.

Ariana Cool-line er designet til lavtryksoperation. Kapaciteten er afhængig af viskositet, mundstykke og længde på slangen.

Cool line omfatter en bred vifte af tilbehør og dele såsom runde dyser, flade dyser med gevind skrueforbindelser, Y distributører, afspærringsventiler, faste linjer, metal distributionssystemer osv.

Ariana Cool line represents the most complete modular system on the market. The only modular system on the market that are compatible with 80% of conventional systems without any adapters. Cool line products are made of high quality Hostaform plastic pellets, making them more resilient.

Ariana Cool-line is designed for low pressure operation. Capacity is dependent viscosity, nozzle and the length of the tubing.

Cool line includes a wide range of accessories and parts such as round nozzles flat nozzles threaded screw connections, Y distributors shut-off valves, fixed lines, metal distribution systems, etc.

Start kit

20 stk. slangeled.
3 stk. rundt-mundstykker ø1,6mm - 3,2mm - 6,4mm.
1 stk. fiskehale dyse.
2 stk. tilslutninger: 1/4" og 1/8"NPT.

Art.nr. Emb.
CL02190001 1

Start kit

20 pcs. hose joints.
3 pcs. round nozzle ø1,6mm - 3,2mm - 6,4mm.
1 pcs. flat nozzle.
2 pcs. connector 1/4" and 1/8"NPT.

Art.# Quantity
CL02190001 1



Tilslutning 1/4"

Art.nr.	Gevind	Emb.
CL02117014	1/4"NPT	4
CL02117004	1/8"NPT	4

Connector 1/4"

Art.#	Thread	Quantity
CL02117014	1/4"NPT	4
CL02117004	1/8"NPT	4



Slangeled

Art.nr.	Længde	Emb.
CL02110001	Ca. 31cm	1
CL02110251	Ca. 25mtr	1

Hose joints

Art.#	Length	Quantity
CL02110001	Approx. 31cm	1
CL02110251	Approx. 25mtr	1



Muffe 1/4"

Art.nr. Emb.
CL02117064 4

Sleeve 1/4"

Art.# Quantity
CL02117064 4



Special tilslutninger

Art.nr.	Type	Emb.
CL02117022	Slange/udv. 1/8NPT	2
CL02125102	Kontraventil	2

Special fittings

Art.#	Model	Quantity
CL02117022	Hose/1/8NPT male	2
CL02125102	Non-return valve	2



Special tilslutninger

Art.nr.	Type	Emb.
CL02113002	Grenrør	2
CL02122002	90° vinkel	2
CL02123002	T-stykke	2

Special fittings

Art.#	Model	Quantity
CL02113002	Y-fitting	2
CL02122002	Elbow 90°	2
CL02123002	T-fitting	2



Lukkehane, syrebestandig

Art.nr. Emb.
CL02116122 2

Control valve, acid resistant

Art.# Quantity
CL02116122 2



Lukkehane

Art.nr.	Type	Emb.
CL02116002	Slange - slange	2
CL02116012	Slange - udv. gevind	2
CL02116022	Slange - ind. gevind	2
CL02116032	NPS - udv. gevind	2

Control valve

Art.#	Model	Quantity
CL02116002	Hose - hose	2
CL02116012	Hose - 1/4"Male	2
CL02116022	Hose - 1/4"Female	2
CL02116032	NPS - 1/4"Male	2



Vinkeldyse 90° 1/4"

Art.nr.	Dia. ø	Emb.
CL02111044	1,6mm	4
CL02111054	3,2mm	4
CL02111064	6,4mm	4

Angle nozzle 90° 1/4"

Art.#	Dia. ø	Quantity
CL02111044	1.6mm	4
CL02111054	3.2mm	4
CL02111064	6.4mm	4

**Multidyse 16 huller x 1mm 1/4"**

Art.nr.	Dia. ø	Emb.
CL02112022	1,0mm	2

Flare nozzle 16 holes x 1mm 1/4"

Art.#	Dia. ø	Quantity
CL02112022	1.0mm	2

**Multidyse 6 huller 90° 1/4"**

Art.nr.	Emb.
CL02112032	2

Flare nozzle 6 holes 90° 1/4"

Art.#	Quantity
CL02112032	2

**Multidyse 16 huller 1/4"**

Art.nr.	Emb.
CL02112062	2

Flare nozzle 16 holes 1/4"

Art.#	Quantity
CL02112062	2

**Multidyse 16 huller x 2mm 1/4"**

Art.nr.	Dia. ø	Emb.
CL02112072	2,0mm	2

Flare nozzle 16 holes x 2mm 1/4"

Art.#	Dia. ø	Quantity
CL02112072	2.0mm	2

**Rundt mundstykke**

Art.nr.	Dia. ø	Emb.
CL02111004	1,6mm	4
CL02111014	3,2mm	4
CL02111024	6,4mm	4

Round nozzle

Art.#	Dia. ø	Quantity
CL02111004	1.6mm	4
CL02111014	3.2mm	4
CL02111024	6.4mm	4

**Fiskehale dyse**

Art.nr.	Bredde	Emb.
CL02112002	27mm	2
CL02112012	32mm	2

Flat nozzle

Art.#	Width	Quantity
CL02112002	27mm	2
CL02112012	32mm	2

**Ringdyse**

16 moduler, inkl. slut modul.

Art.nr.	Emb.
CL02114141	1

Ring jet system

16 modules, incl end piece.

Art.#	Quantity
CL02114141	1

**Magnetisk kit**

16stk. slangeled, magnetisk bund, lukkehane, rundt mundstykke 6,4mm, slangetilslutning.

Art.nr.	Emb.
CL02190291	1

Magnetic kit

16pcs. hose, magnetic base, ball valve, round nozzle 6,4mm, hose connector.

Art.#	Quantity
CL02190291	1

**Monteringstang 1/4"**

Art.nr.	Emb.
CL02180001	1

Hose assembling pliers 1/4"

Art.#	Quantity
CL02180001	1



Beslag for T-stykker

Art.nr.	Emb.
CL02124001	1

Bracket for T-fitting

Art.#	Quantity
CL02124001	1


Fordeler med 4 udgange

1 x 3/8" - 4 x 1/4"

Art.nr.	Emb.
CL02125011	1

Distribution device with 4 outlets

1 x 3/8" - 4 x 1/4".

Art.#	Quantity
CL02125011	1


T-forbindelse

1/4" - 2 x 3/8".

Art.nr.	Emb.
CL02125022	2

T-connection

1/4" - 2 x 3/8".

Art.#	Quantity
CL02125022	2


Lukkehane 1/4"

Art.nr.	Emb.
CL02125032	2

Ball valve 1/4"

Art.#	Quantity
CL02125032	2


Dobbelnippel 1/4"

Art.nr.	Emb.
CL02125042	2

Double nipple 1/4"

Art.#	Quantity
CL02125042	2


Slangetilslutning 1/4"

Art.nr.	Emb.
CL02125052	2

Hose connector 1/4"

Art.#	Quantity
CL02125052	2


Reduktionsstykke

1/4" - 1/8".

Art.nr.	Emb.
CL02125062	2

Reducer

1/4" - 1/8".

Art.#	Quantity
CL02125062	2


Sekskantet lukkestykke 1/8"

Art.nr.	Emb.
CL02125072	2

Hexagonal closing cap 1/8"

Art.#	Quantity
CL02125072	2


Sekskantet lukkestykke 1/4"

Art.nr.	Emb.
CL02125082	2

Hexagonal closing cap 1/4"

Art.#	Quantity
CL02125082	2


Sekskantet lukkestykke 1/4"

Art.nr.	Emb.
CL02125092	2

Hexagonal closing cap 1/4"

Art.#	Quantity
CL02125092	2



Start kit

16 stk. slangeled.
3 stk. rundt-mundstykker ø1,6mm - 3,2mm - 6,4mm.
1 stk. fiskehale dyse.
2 stk. tilslutninger: 3/8" og 1/2".

Art.nr.	Emb.
CL02290001	1

Start kit

16 pcs. hose joints.
3 pcs. round nozzle ø1,6mm - 3,2mm - 6,4mm.
1 pcs. flat nozzle.
2 pcs. connector 3/8" and 1/2".

Art.#	Quantity
CL02290001	1

**Tilslutning 3/8"**

Art.nr.	Gevind	Emb.
CL02217004	3/8"NPS	4
CL02217014	1/2"NPS	4

Connector 3/8"

Art.#	Thread	Quantity
CL02217004	3/8"NPS	4
CL02217014	1/2"NPS	4

**Slangeled**

Art.nr.	Længde / Antal	Emb.
CL02210001	Ca. 30cm (2x8)	1
CL02210151	802 stk.	1

Hose joints

Art.#	Length / Pcs.	Quantity
CL02210001	Approx. 30cm	1
CL02210151	802 pcs.	1

**Rundt mundstykke**

Art.nr.	Dia. ø	Emb.
CL02211004	6,4mm	4
CL02211014	9,5mm	4
CL02211024	12,7mm	4

Round nozzle

Art.#	Dia. ø	Quantity
CL02211004	6,4mm	4
CL02211014	9,5mm	4
CL02211024	12,7mm	4

**Fiskehale dyse**

Art.nr.	Bredde	Emb.
CL02212002	32mm	2

Flat nozzle

Art.#	Width	Quantity
CL02212002	32mm	2

**Lukkehane**

Art.nr.	Type	Emb.
CL02216012	Slange - 3/8"NPT	2
CL02216022	Slange - 3/8"	2

Control valve

Art.#	Model	Quantity
CL02216012	Hose - 3/8"NPT	2
CL02216022	Hose - 3/8"	2

**Kontraventil 3/8"**

Art.nr.	Emb.
CL02225092	2

Non-return valve 3/8"

Art.#	Quantity
CL02225092	2

**Fordeler med 4 udgange**

1 x 1/2" - 4 x 3/8".

Art.nr.	Emb.
CL02225011	1

Distribution device with 4 outlets

1 x 1/2" - 4 x 3/8".

Art.#	Quantity
CL02225011	1

**T-forbindelse**

3/8" - 2 x 3/8".

Art.nr.	Emb.
CL02225022	2

T-connection

3/8" - 2 x 3/8".

Art.#	Quantity
CL02225022	2

**Lukkehane 3/8"**

Art.nr.	Emb.
CL02225032	2

Ball valve 3/8"

Art.#	Quantity
CL02225032	2

**Dobbelnippel 3/8"**

Art.nr.	Emb.
CL02225042	2

Double nipple 3/8"

Art.#	Quantity
CL02225042	2

**Monteringstang 3/8"**

Art.nr.	Emb.
CL02280001	1

Hose assembling pliers 3/8"

Art.#	Quantity
CL02280001	1



Start kit

10 stk. slangeled.
3 stk. rundt-mundstykker ø6,4mm - 9,5mm - 12,7mm.
1 stk. fiskehale dyse.
2 stk. tilslutninger: 1/2" og 3/8"NPT.

Art.nr.	Emb.
CL02390001	1

Start kit

10 pcs. hose joints.
3 pcs. round nozzle ø6,4mm - 9,5mm - 12,7mm.
1 pcs. flat nozzle.
2 pcs. connector 1/2" and 3/8"NPT.

Art.#	Quantity
CL02390001	1

**Tilslutning 1/2"**

Art.nr.	Gevind	Emb.
CL02317004	1/8"NPT	4
CL02317014	1/2"NPT	4

Connector 1/2"

Art.#	Thread	Quantity
CL02317004	1/8"NPT	4
CL02317014	1/2"NPT	4

**Slangeled**

Art.nr.	Længde	Emb.
CL02310001	Ca. 29cm	1

Hose joints

Art.#	Length	Quantity
CL02310001	Approx. 29cm	1

**Rundt mundstykke**

Art.nr.	Dia. ø	Emb.
CL02311004	6,4mm	4
CL02311014	9,5mm	4
CL02311024	12,7mm	4

Round nozzle

Art.#	Dia. ø	Quantity
CL02311004	6,4mm	4
CL02311014	9,5mm	4
CL02311024	12,7mm	4

**Fiskehale dyse**

Art.nr.	Bredde	Emb.
CL02312002	35mm	2
CL02312012	50mm	2

Flat nozzle

Art.#	Width	Quantity
CL02312002	35mm	2
CL02312012	50mm	2

**Ringdyse**

16 moduler, inkl. slut modul.

Art.nr.	Emb.
CL02314141	1

Ring jet system

16 modules, incl end piece.

Art.#	Quantity
CL02314141	1

**Slangeled, ekstra stærkt 1/2"**

Art.nr.	Emb.
CL02310011	1

Hose joint, extra strong 1/2"

Art.#	Quantity
CL02310011	1

**Special tilslutninger**

Art.nr.	Type	Emb.
CL02313002	Grenrør	2
CL02322002	90° vinkel	2
CL02323002	T-stykke	2

Special fittings

Art.#	Model	Quantity
CL02313002	Y-fitting	2
CL02322002	Elbow 90°	2
CL02323002	T-fitting	2

**Special tilslutninger**

Art.nr.	Type	Emb.
CL02325102	Kontraventil	2
CL02319002	Reduktion 1/2" til 1/4"	2
CL02320002	Y-Reduktion 1/2" til 2 x 1/4"	2

Special fittings


Art.#	Model	Quantity
CL02325102	Non-return valve	2
CL02319002	Reducer 1/2" to 1/4"	2
CL02320002	Y-Reducer 1/2" to 2 x 1/4"	2

**Lukkehane 1/2"NTP**

Art.nr.	Type	Emb.
CL02316002	Slange - slange	2
CL02316012	Slange - udv. gevind	2
CL02316022	Slange - ind. gevind	2

Control valve 1/2"NPT

Art.#	Model	Quantity
CL02316002	Hose - hose	2
CL02316012	Hose - 1/4" Male	2
CL02316022	Hose - 1/4" Female	2



Monteringstang 1/2"

Art.nr.	Emb.
CL02380001	1

Hose assembling pliers 1/2"

Art.#	Quantity
CL02380001	1

**Beslag for T-stykker**

Art.nr.	Emb.
CL02324001	1

Bracket for T-fitting

Art.#	Quantity
CL02324001	1

**T-forbindelse**

1/2" - 2 x 1/2".

Art.nr.	Emb.
CL02325022	2

T-connection

1/2" - 2 x 1/2".

Art.#	Quantity
CL02325022	2

**Lukkehane 1/2"**

Art.nr.	Emb.
CL02325032	2

Ball valve 1/2"

Art.#	Quantity
CL02325032	2

**Dobbelnippel 1/2"**

Art.nr.	Emb.
CL02325042	2

Double nipple 1/2"

Art.#	Quantity
CL02325042	2

**Slangetilslutning 1/2"**

Art.nr.	Emb.
CL02325052	2

Hose connector 1/2"

Art.#	Quantity
CL02325052	2

**Reduktionsstykke**

1/2" - 3/8".

Art.nr.	Emb.
CL02325062	2

Reducer

1/2" - 3/8".

Art.#	Quantity
CL02325062	2

**Sekskantet lukkestykke 1/2"**

Art.nr.	Emb.
CL02325072	2

Hexagonal closing cap 1/2"

Art.#	Quantity
CL02325072	2



Start kit 3/4"

10 stk. slangeled.
 2 stk. rundt-mundstykker ø16mm - ø19mm.
 1 stk. fiskehale dyse 75mm.
 1 stk. tilslutninger: NPS-3/4".

Art.nr. Emb.
 CL02490001 1

Start kit 3/4"

10 pcs. hose joints.
 2 pcs. round nozzle ø16mm - ø19mm.
 1 pcs. flat nozzle 75mm.
 1 pcs. connector NPS-3/4".

Art.# Quantity
 CL02490001 1

**Tilslutning 3/4"**

Art.nr. Emb.
 CL02417004 4

Connector 3/4"

Art.# Quantity
 CL02417004 4

**Slangeled**

Art.nr. Længde Emb.
 CL02410001 Ca. 29,5cm 2x5

Hose joints

Art.# Length Quantity
 CL02410001 Approx. 29,5cm 2x5

**Rundt mundstykke**

Art.nr. Dia. ø Emb.
 CL02411004 16,0mm 4
 CL02411014 19,0mm 4

Round nozzle

Art.# Dia. ø Quantity
 CL02411004 16,0mm 4
 CL02411014 19,0mm 4

**Fiskehale dyse**

Art.nr. Bredde Emb.
 CL02412002 75mm 2

Flat nozzle

Art.# Width Quantity
 CL02412002 75mm 2

**Special tilslutninger**

Art.nr. Type Emb.
 CL02413002 Grenrør 2

Special fittings

Art.# Model Quantity
 CL02413002 Y-fitting 2

**Reduktionsstykke**

3/4" - 1/2".

Art.nr. Emb.
 CL02419002 2

Reducer

3/4" - 1/2".

Art.# Quantity
 CL02419002 2

**Monteringstang 3/4"**

Art.nr. Emb.
 CL02480001 1

Hose assembling pliers 3/4"

Art.# Quantity
 CL02480001 1

**Spånkrog**

Spånkrog til fjernelse af spåner på svært tilgængelige steder. Spånkrogen har et beskyttelsesskjold for hånden.

Art.nr. Længde Emb.
 CL0541300 300mm 1
 CL0541400 500mm 1

Chip hook

For removing chips that are hard to reach. The guard protects your hand from injury.

Art.# Length Quantity
 CL0541300 300mm 1
 CL0541400 500mm 1



Lonn Rensepistol

Rensepistolen er modstandsdygtig overfor vedvarende temperaturer på +65°C samt +100°C kortvarigt.

Art.nr.		Emb.
LNR	3/4"R Jetstråle	1

Lonl Cleaning gun / Water saver – Jet stream

The cleaning gun is resistant to continuous temperatures of +65°C, and +100°C briefly.

Art.#		Quantity
LNR	3/4"BSP Jet spray	1

**Tilbehør for Lonl rensepistoler**

Art.nr.		Emb.
LNG	Gummitud for LNR	1

Accessories for Lonl cleaning guns

Art.#		Quantity
LNG	Rubber nozzle for LNR	1

**KABI Blæsepistol**

1/4"R indv.

Max. arb.tryk: 16 bar.

Temp. bestandig: –10 til +80°C.

Art.nr.	Emb.
KB245	25

KABI Blowgun

1/4"BSP (F).

Max. working pressure: 16 bar.

Temp. resistant: –10 to +80°C.

Art.#	Quantity
KB245	25

**Trykluft blæsepistol i aluminium**

1/4"R indv.

Art.nr.	Emb.
50475	1

Blow gun in aluminum

1/4"BSP (F).

Art.#	Quantity
50475	1

**Slangenippel "SNT"**

Art.nr.	Tilslutning	Emb.
50640	1/4"R x 6mm	1
50642	1/4"R x 8mm	1
50644	1/4"R x 10mm	1
50647	1/4"R x 13mm	1

Hose Connection "SNT"

Art.#	Connection	Quantity
50640	1/4"BSP x 6mm	1
50642	1/4"BSP x 8mm	1
50644	1/4"BSP x 10mm	1
50647	1/4"BSP x 13mm	1



Diesel transport tanke
Diesel pumpesæt
Mobile AdBlue® anlæg
AdBlue® pumpesæt
Manuelle pumper

Transportable diesel tanks
Diesel pump kits
Mobile AdBlue® pump kits
AdBlue® pump kits
Hand pumps



Diesel transport tanke Transportable diesel tanks	116
El-pumpesæt for diesel og fyringsolie Electric pump kits for diesel and heating oil	117
Mobile AdBlue® el-pumpeanlæg Mobile AdBlue® electric pump kit	120
El-pumpesæt for AdBlue® Electric pump kits for AdBlue®	122
Manuelle pumper for AdBlue® Rotary and lever pumps for AdBlue®	128

KABI Diesel transporttank 250 ltr.

ADR certificeret (jf. kap. 6.5) transportabel diesel-tank med elektrisk pumpe, automatisk pistol og 5 mtr. udløbsslange. Tanken er fremstillet af UV-stabiliseret MD-polyethylen. Indvendige finner beskytter mod for stor bevægelse af brændstoffet under transport. 2 gasfjedre holder låget åbent, og den indbyggede lås sikrer distributionssystemet mod uautoriseret adgang. Et unikt design tillader adgang med palleløfter fra alle sider. Tanken er udstyret med 4 sjækler i rustfri stål til løftning.

Tankens dimensioner LxBxH: 1,20 x 0,80 x 0,57 mtr.

Pumpe: 40 l/min. Selvansugende med by-pass.

Drifttid: max. 30 min. 4 mtr. langt strømkabel.

Art.nr.	Tæller	Spænding	Kapacitet	Emb.
KT4025012	Nej	12V DC	250 ltr.	1
KT4025012-A	Ja	12V DC	250 ltr.	1
KT4025024	Nej	24V DC	250 ltr.	1
KT4025030	Nej	230V AC	250 ltr.	1

KABI Transportable diesel tank 250 ltr.

ADR certified (cf. chapter 6.5) transportable diesel tank with electric pump, automatic nozzle and 5 mtr. delivery hose. The tank is made of UV-stabilized polyethylene-MD. Inner fins protects the fuel against excessive movement during transportation. The lid is held by 2 telescopes, and a built-in lock secures the distribution system against unauthorized access. The unique design allows access with pallet lifter from all sides. The tank is fitted with 4 shackles in stainless steel for lifting.

Tank dimensions LxWxH: 1.20 x 0.80 x 0.57 mtr.

Pump: 40 l/min. Self-priming with by-pass.

Duty cycle: max. 30 min. 4 mtr. power cable.

Art.#	Meter	Power	Capacity	Quantity
KT4025012	No	12V DC	250 ltr.	1
KT4025012-A	Yes	12V DC	250 ltr.	1
KT4025024	No	24V DC	250 ltr.	1
KT4025030	No	230V AC	250 ltr.	1

**KABI Diesel transporttank 425 ltr.**

ADR certificeret (jf. kap. 6.5) transportabel diesel-tank med elektrisk pumpe, automatisk pistol og 5 mtr. udløbsslange. Tanken er fremstillet af UV-stabiliseret MD-polyethylen. Indvendige finner beskytter mod for stor bevægelse af brændstoffet under transport. 2 gasfjedre holder låget åbent, og den indbyggede lås sikrer distributionssystemet mod uautoriseret adgang. Et unikt design tillader adgang med palleløfter fra alle sider. Tanken er udstyret med 4 sjækler i rustfri stål til løftning.

Tankens dimensioner LxBxH: 1,20 x 0,80 x 0,77 mtr.

Pumpe: 40 l/min. Selvansugende med by-pass.

Drifttid: max. 30 min. 4 mtr. langt strømkabel.

Art.nr.	Tæller	Spænding	Kapacitet	Emb.
KT4042512	Nej	12V DC	425 ltr.	1
KT4042512-A	Ja	12V DC	425 ltr.	1
KT4042524	Nej	24V DC	425 ltr.	1
KT4042530	Nej	230V AC	425 ltr.	1

KABI Transportable diesel tank 425 ltr.

ADR certified (cf. chapter 6.5) transportable diesel tank with electric pump, automatic nozzle and 5 mtr. delivery hose. The tank is made of UV-stabilized polyethylene-MD. Inner fins protects the fuel against excessive movement during transportation. The lid is held by 2 telescopes, and a built-in lock secures the distribution system against unauthorized access. The unique design allows access with pallet lifter from all sides. The tank is fitted with 4 shackles in stainless steel for lifting.

Tank dimensions LxWxH: 1.20 x 0.80 x 0.77 mtr.

Pump: 40 l/min. Self-priming with by-pass.

Duty cycle: max. 30 min. 4 mtr. power cable.

Art.#	Meter	Power	Capacity	Quantity
KT4042512	No	12V DC	425 ltr.	1
KT4042512-A	Yes	12V DC	425 ltr.	1
KT4042524	No	24V DC	425 ltr.	1
KT4042530	No	230V AC	425 ltr.	1

**KABI Diesel transporttank 600 ltr.**

ADR certificeret (jf. kap. 6.5) transportabel diesel-tank med elektrisk pumpe, automatisk pistol og 5 mtr. udløbsslange. Tanken er fremstillet af UV-stabiliseret MD-polyethylen. Indvendige finner beskytter mod for stor bevægelse af brændstoffet under transport. 2 gasfjedre holder låget åbent, og den indbyggede lås sikrer distributionssystemet mod uautoriseret adgang. Et unikt design tillader adgang med palleløfter fra alle sider. Tanken er udstyret med 4 sjækler i rustfri stål til løftning.

Tankens dimensioner LxBxH: 1,20 x 0,80 x 0,97 mtr.

Pumpe: 40 l/min. Selvansugende med by-pass.

Drifttid: max. 30 min. 4 mtr. langt strømkabel.

Art.nr.	Tæller	Spænding	Kapacitet	Emb.
KT4060012	Nej	12V DC	600 ltr.	1
KT4060012-A	Ja	12V DC	600 ltr.	1
KT4060024	Nej	24V DC	600 ltr.	1
KT4060030	Nej	230V AC	600 ltr.	1

KABI Transportable diesel tank 600 ltr.

ADR certified (cf. chapter 6.5) transportable diesel tank with electric pump, automatic nozzle and 5 mtr. delivery hose. The tank is made of UV-stabilized polyethylene-MD. Inner fins protects the fuel against excessive movement during transportation. The lid is held by 2 telescopes, and a built-in lock secures the distribution system against unauthorized access. The unique design allows access with pallet lifter from all sides. The tank is fitted with 4 shackles in stainless steel for lifting.

Tank dimensions LxWxH: 1.20 x 0.80 x 0.97 mtr.

Pump: 40 l/min. Self-priming with by-pass.

Duty cycle: max. 30 min. 4 mtr. power cable.

Art.#	Meter	Power	Capacity	Quantity
KT4060012	No	12V DC	600 ltr.	1
KT4060012-A	Yes	12V DC	600 ltr.	1
KT4060024	No	24V DC	600 ltr.	1
KT4060030	No	230V AC	600 ltr.	1



**KABI El-pumpesæt for diesel og fyringsolie
inkl. manuel pistol**

Komplet pumpesæt, IP54 kapsling.
Selvansugende lamelpumpe med by-pass.
Tilslutning 3/4"R. 4 mtr. antistatisk slange,
deles til sug og aftapning, manuel pistol,
bundfilter og fittings.
Drifttid: max. 30 min.

Art.nr.	Volt	Kapacitet	Emb.
40512	12V DC	40 ltr./min	1
40524	24V DC	40 ltr./min	1
40530	230V AC	40 ltr./min	1

**KABI Electric pump kit for diesel and heating oil
incl. manual nozzle**

Complete pump kit, IP54 enclosure.
Self-priming pump with by-pass. Thread 3/4"BSP.
4 mtr. antistatic hose, manual nozzle, strainer and
fittings.
Duty cycle: max. 30 min.

Art.#	Volt	Capacity	Quantity
40512	12V DC	40 ltr./min	1
40524	24V DC	40 ltr./min	1
40530	230V AC	40 ltr./min	1


**KABI El-pumpesæt for diesel og fyringsolie
inkl. automatisk pistol**

Komplet pumpesæt, IP54 kapsling.
Selvansugende lamelpumpe med by-pass.
Tilslutning 3/4"R. 4 mtr. antistatisk slange,
deles til sug og aftapning, autopistol,
bundfilter og fittings.
Drifttid: max. 30 min.

Art.nr.	Volt	Kapacitet	Emb.
40551	12V DC	40 ltr./min	1
40552	24V DC	40 ltr./min	1
40553	230V AC	40 ltr./min	1

**KABI Electric pump kit for diesel and heating oil
incl. automatic nozzle**

Complete pump kit, IP54 enclosure.
Self-priming pump with by-pass. Thread 3/4"BSP.
4 mtr. antistatic hose, automatic nozzle, strainer and
fittings.
Duty cycle: max. 30 min.

Art.#	Volt	Capacity	Quantity
40551	12V DC	40 ltr./min	1
40552	24V DC	40 ltr./min	1
40553	230V AC	40 ltr./min	1


**KABI El-pumpesæt for diesel og fyringsolie
inkl. automatisk pistol med integreret tæller**

Komplet pumpesæt, IP54 kapsling.
Selvansugende lamelpumpe med by-pass.
Tilslutning 3/4"R. 4 mtr. antistatisk slange, deles til
suge og aftapning, autopistol med tæller, bundfilter
og fittings.
Drifttid: max. 30 min.

Art.nr.	Volt	Kapacitet	Emb.
40651	12V DC	40 ltr./min	1
40652	24V DC	40 ltr./min	1
40653	230V AC	40 ltr./min	1

**KABI Electric pump kit for diesel and heating oil
incl. automatic nozzle with meter**

Complete pump kit, IP54 enclosure.
Self-priming pump with by-pass. Thread 3/4"BSP.
4 mtr. antistatic hose, automatic nozzle with meter,
strainer and fittings.
Duty cycle: max. 30 min.

Art.#	Volt	Capacity	Quantity
40651	12V DC	40 ltr./min	1
40652	24V DC	40 ltr./min	1
40653	230V AC	40 ltr./min	1



KABI El-pumper for diesel og fyringsolie

Løse pumper, selvansugende med by-pass.

Kan anvendes i temperaturer ned til minus 20°C.

Tilslutning 3/4"R, IP54 kapsling.

Drifttid: max. 30 min.

Art.nr.	Spænding	Kapacitet	Emb.
40501	12V DC	40 ltr./min	1
40502	24V DC	40 ltr./min	1
40503	230V AC	40 ltr./min	1

KABI Electric pumps for diesel & heating oil

Electric pumps, self-priming with by-pass.

Works in temperatures down to minus 20°C.

Connection 3/4"BSP. IP54 enclosure.

Duty cycle: max. 30 min.

Art.#	Volt	Capacity	Quantity
40501	12V DC	40 ltr./min	1
40502	24V DC	40 ltr./min	1
40503	230V AC	40 ltr./min	1

**KABI Automatisk pistol med tæller**

Automatisk pistol med 4 cifret tæller samt swivel.

Max: 60 ltr./min. Tilslutning: ø19mm slangestuds.

Art.nr.	Emb.
40706	1

KABI Automatic nozzle with meter

Automatic nozzle with 4 digit counter and swivel.

Max: 60 ltr./min. Connection: ø19mm hose pipe.

Art.#	Quantity
40706	1

**KABI Manuel pistol med digital tæller**

Manuel pistol med digital tæller samt swivel.

Max: 60 ltr./min. Tilslutning: ø19mm slangestuds.

Art.nr.	Emb.
40709	1

KABI Manual nozzle with digital meter

Manual nozzle with digital meter and swivel.

Max: 60 ltr./min. Connection: ø19mm hose pipe.

Art.#	Quantity
40709	1

**KABI Manuel pistol med swivel**


Til 60 ltr./min.

Art.nr.	Mængde	Tilslutning	Emb.
40700	60 ltr./min	med swivel 1"R	1

KABI Manual nozzle with swivel

For 60 ltr./min.

Art.#	Capacity	Connection	Quantity
40700	60 ltr./min	with swivel 1"BSP	1

**KABI Automatisk pistol**

Til 60 eller 120 ltr./min.

Art.nr.	Mængde	Tilslutning	Emb.
40704	60 ltr./min	inkl. swivel 1"R	1
40705	60 ltr./min	inkl. swivel 3/4"R	1
40707	120 ltr./min	uden swivel 1"R	1

KABI Automatic nozzle

For 60 or 120 ltr./min.

Art.#	Capacity	Connection	Quantity
40704	60 ltr./min	incl. swivel 1"BSP	1
40705	60 ltr./min	incl. swivel 3/4"BSP	1
40707	120 ltr./min	without swivel 1"BSP	1



40704 / 40705

Tilbehør

Art.nr.		Emb.
40729	3/4"R swivel for 40705	1
40732	1"R swivel for 40707	1
40740	1"R swivel for 40704	1

Accessories

Art.#		Quantity
40729	3/4"BSP swivel for 40705	1
40732	1"BSP swivel for 40707	1
40740	1"BSP swivel for 40704	1



40707

KABI Antistatisk diesel slange 3/4"

Ø19mm antistatisk slange.

Art.nr.	Længde	Emb.
40721	4 meter	1
40723	Sælges pr. meter	1
40723UC	50 meter rulle	1

KABI Antistatic diesel hose 3/4"

Ø19mm antistatic hose.

Art.#	Length	Quantity
40721	4 meters	1
40723	Sold pr. meter	1
40723UC	50 meters roll	1


Fittings for KABI el-pumper

Art.nr.		Emb.
40724	Fittingsæt komplet - 3/4"R inkl. bundfilter 3/4"R (indv.)	1
40739	Bundfilter 3/4"R (indv.)	1
40725	Bundfilter 1"R (indv.)	1
40729	Swivel 3/4"R (indv.) - 3/4"R (udv.)	1
40740	Swivel 1"R (indv.) - 3/4"R (udv.)	1
40732	Swivel 1"R (indv.) - 1"R (udv.)	1
40733	Swivel 3/4"R (udv.) - ø19mm slangetilslutning	1
40734	Swivel 1"R (udv.) - ø19mm slangetilslutning	1
40735	Drejeled 90° - 3/4" (udv. - indv.)	1
40736	Drejeled 90° - 1" (udv. - indv.)	1

Fittings for KABI electric pumps

Art.#		Quantity
40724	Fittings - 3/4"BSP incl. strainer 3/4"BSP (F)	1
40739	Strainer 3/4"BSP (F)	1
40725	Strainer 1"BSP (F)	1
40729	Swivel 3/4"BSP (F) - 3/4"BSP (M)	1
40740	Swivel 1"BSP (F) - 3/4"BSP (M)	1
40732	Swivel 1"BSP (F) - 1"BSP (M)	1
40733	Swivel 3/4"BSP (M) - ø19mm hose connection	1
40734	Swivel 1"BSP (M) - ø19mm hose connection	1
40735	Rotating connector 90° - 3/4" (M - F)	1
40736	Rotating connector 90° - 1" (M - F)	1



KABI Mobilt AdBlue® el-pumpeanlæg

El-pumpeanlæg for påfyldning af AdBlue® til køretøjer. Monteret på vogn, der passer til en 200 L tromle. Beslag med holder til pistol i begge sider. Hver holder kan vendes begge veje, så man kan arbejde optimalt fra alle sider af vognen.

Leveres standard med følgende udstyr:

- Elektrisk AdBlue® Pumpe - 35 l/min
- Pistol med udskifteligt udløbsrør (ø15 og ø19mm) samt indbygget digital tæller (42106)
- SEC kobling for tilslutning på sugerør
- Sugerør til 200 ltr. tromle
- 6 mtr. EPDM antistatisk slange
- Rustfrit beslag for AdBlue® pumpen
- Kørevogn for 200 ltr. tromle
- Holder i begge sider til pistol
- Sikkerhedskæde holder tromlen fast

Pumpe: 35 l/min. Selvsugende med by-pass.

Drifttid: kontinuert. 4 mtr. langt strømkabel.

Art.nr.	Tæller	Spænding	Pistol	Emb.
44831-M	Ja	230V AC	Automatisk	1

KABI Mobile AdBlue® Pump Kit

Pump kit for refuelling AdBlue® to vehicles.

Installed on a trolley suitable for 200 L drums. Bracket in both sides to hold the nozzle. The nozzle can be turned both ways, so that you can work optimally from all sides of the trolley.

Comes standard with:

- Electric AdBlue® Pump - 35 l/min
- Nozzle with replaceable outlet tube (ø15 and ø19mm) and built-in digital meter (42106)
- SEC suction connection
- Suction tube for 200 ltr. drums
- 6 mtr. EPDM antistatic hose
- Stainless steel bracket for the pump
- Trolley for 200 ltr. drums
- Bracket in both sides to hold the nozzle
- Security chain fastening the drum

Pump: 35 l/min. Self-priming with by-pass.

Duty cycle: continuously. 4 mtr. power cable.

Art.#	Meter	Power	Nozzle	Quantity
44831-M	Yes	230V AC	Automatic	1

**KABI Mobilt El-pumpe sæt**

- El-pumpe med 4,5 meter strømkabel (40170)
- Transportvogn til 200 L tromle (40328)

Elektrisk pumpe i PP plast. 2 mtr. udløbslange og pistol med ø19mm udløbsstuds. IP55 kapsling. To adaptore med Mauser og Trisure gevind medfølger. Passer til en 200 ltr. tromle. Pumpen har en støjsvag motor, og er let at transportere.

Spænding: 12V DC eller 230V AC.

Kapacitet: 14 l/min.

Drifttid: Max. 15 min.

Pakning: Viton.

Velegnet til: AdBlue®, vand, frostvæske og sprinklervæske.

Transportvognen til 200 L tromler er udstyret med en kraftig sikkerhedskæde.

Art.nr.	Tæller	Spænding	Pistol	Emb.
44170M	Nej	12V DC / 230V AC	Manuel	1

KABI Mobile Electric pump kit

- Electric pump with 4.5 meter power cord (40170)
- Trolley for 200 L drum (40328)

Electric pump in PP plastic. 2 mtr. outlet hose and nozzle with ø19mm outlet tube. IP55 enclosure. Two adaptors with Mauser and Trisure thread is included. Fits perfectly on a 200 ltr. drum. The pump is silent in use and easy to transport.

Power: 12V DC or 230V AC.

Capacity: 14 l/min.

Operating time: Max. 15 min.

Gasket: Viton.

Suitable for: AdBlue®, water, antifreeze and windshield washer fluid.

The solid trolley for 200 L drums is equipped with a strong safety chain.

Art.#	Meter	Power	Nozzle	Quantity
44170M	No	12V DC / 230V AC	Manual	1



KABI Mobilt Akku El-pumpe sæt

- El-pumpe med genopladeligt Li-Ion batteri (40160)
- Transportvogn til 200 L tromle (40328)

2 mtr. slange samt pistol med ø15mm udløbsstuds. Inkl. 3 adaptere med Mauser, Trisure og DIN71 gevind. Transportvogn i solid udførelse med tilhørende sikkerhedskæde. Batteri og lader til 230V AC medfølger.

Drifttid: Max. 15 min (herefter 30 min. pause)

Pumpen er velegnet til:

AdBlue®, Vand, Frostvæske og Sprinklervæske.

Transportvognen til 200 L tromler er udstyret med en kraftig sikkerhedskæde.

Art.nr.	Tæller	Spænding	Pistol	Emb.
44160M	Nej	Li-Ion Batteri	Manuel	1
		14,8V / 2,9Ah		

KABI Mobile Accu electric pump kit

- Electric pump with rechargeable Li-Ion battery (40160)
- Trolley for 200 L drum (40328)

2 mtr. hose and nozzle with ø15mm outlet. Incl. 3 adapters with Mauser, Trisure and DIN71 thread. Solid trolley with safety chain. Battery (14,8V) and charger for 230V AC are included.

Duty cycle: Max. 15 min (then 30 min. off)

The pump is suitable for:

AdBlue®, Water, Antifreeze, Windscreen washer fluid.

The solid trolley for 200 L drums is equipped with a strong safety chain.

Art.#	Meter	Power	Nozzle	Quantity
44160M	No	Li-Ion Battery	Manual	1
		14,8V / 2,9Ah		

**KABI Mobilt Akku El-pumpe sæt**

- El-pumpe med genopladeligt Li-Ion batteri (40160)
- Transportvogn til 60 L dunk (40801050)

2 mtr. slange samt pistol med ø15mm udløbsstuds. Inkl. 3 adaptere med Mauser, Trisure og DIN71 gevind. Praktisk transportvogn i solid udførelse. Batteri og lader til 230V AC medfølger.

Drifttid: Max. 15 min (herefter 30 min. pause)

Pumpen er velegnet til:

AdBlue®, Vand, Frostvæske og Sprinklervæske.

Art.nr.	Tæller	Spænding	Pistol	Emb.
44161M	Nej	Li-Ion Batteri	Manuel	1
		14,8V / 2,9Ah		

KABI Mobile Accu electric pump kit

- Electric pump with rechargeable Li-Ion battery (40160)
- Trolley for 60 L canister (40801050)

2 mtr. hose and nozzle with ø15mm outlet. Incl. 3 adapters with Mauser, Trisure and DIN71 thread. Solid and practical trolley. Battery and charger for 230V AC are included.

Duty cycle: Max. 15 min (then 30 min. off)

The pump is suitable for:

AdBlue®, Water, Antifreeze, Windscreen washer fluid.

Art.#	Meter	Power	Nozzle	Quantity
44161M	No	Li-Ion Battery	Manual	1
		14,8V / 2,9Ah		



KABI El-pumpesæt for AdBlue®**Inkl. manuel pistol og beslag til fad**

Komplet pumpesæt, IP55 kapsling.
Selvansugende membranpumpe, tilslutning 1"R.
6 mtr. antistatisk slange (til suge og aftapning)
samt fittings. Drifttid: kontinuert.
Max. sugehøjde 4 mtr. lodret.

Art.nr.	Volt	Kapacitet	Emb.
42512	12V DC	30 ltr./min	1
42524	24V DC	30 ltr./min	1
42530	230V AC	35 ltr./min	1

KABI Electric pump kit for AdBlue®**Incl. manual nozzle and bracket for drum**

Complete pump kit, IP55 enclosure.
Self-priming pump. Connection 1"BSP.
6 mtr. antistatic hose and fittings.
Duty cycle: continuously.
Self-priming up to 4 mtr. vertically.

Art.#	Volt	Capacity	Quantity
42512	12V DC	30 ltr./min	1
42524	24V DC	30 ltr./min	1
42530	230V AC	35 ltr./min	1

**KABI El-pumpesæt for AdBlue®****Inkl. automatisk pistol og beslag til fad**

Komplet pumpesæt, IP55 kapsling.
Selvansugende membranpumpe, tilslutning 1"R.
6 mtr. antistatisk slange (til suge og aftapning)
samt fittings. Drifttid: kontinuert.
Max. sugehøjde 4 mtr. lodret.

Art.nr.	Volt	Kapacitet	Emb.
42612	12V DC	30 ltr./min	1
42624	24V DC	30 ltr./min	1
42630	230V AC	35 ltr./min	1

KABI Electric pump kit for AdBlue®**Incl. automatic nozzle and bracket for drum**

Complete pump kit, IP55 enclosure.
Self-priming pump. Connection 1"BSP.
6 mtr. antistatic hose and fittings.
Duty cycle: continuously.
Self-priming up to 4 mtr. vertically.

Art.#	Volt	Capacity	Quantity
42612	12V DC	30 ltr./min	1
42624	24V DC	30 ltr./min	1
42630	230V AC	35 ltr./min	1

**KABI El-pumpesæt for AdBlue®****Inkl. automatisk pistol med indbygget digital tæller og beslag til fad**

Komplet pumpesæt, IP55 kapsling.
Selvansugende membranpumpe, tilslutning 1"R.
6 mtr. antistatisk slange (til suge og aftapning)
samt fittings. Drifttid: kontinuert.
Max. sugehøjde 4 mtr. lodret.

Art.nr.	Volt	Kapacitet	Emb.
42412	12V DC	30 ltr./min	1
42424	24V DC	30 ltr./min	1
42430	230V AC	35 ltr./min	1

KABI Electric pump kit for AdBlue®**Incl. automatic nozzle with built-in digital flow meter and bracket for drum**

Complete pump kit, IP55 enclosure.
Self-priming pump. Connection 1"BSP.
6 mtr. antistatic hose and fittings.
Duty cycle: continuously.
Self-priming up to 4 mtr. vertically.

Art.#	Volt	Capacity	Quantity
42412	12V DC	30 ltr./min	1
42424	24V DC	30 ltr./min	1
42430	230V AC	35 ltr./min	1



KABI El-pumpesæt for AdBlue®
Inkl. manuel pistol og beslag til IBC tank

Komplet pumpesæt, IP55 kapsling.
Selvansugende membranpumpe, tilslutning 1"R.
6 mtr. antistatisk slange (til suge og aftapning)
samt fittings. Drifttid: kontinuerligt.
Max. sugehøjde 4 mtr. lodret.

Art.nr.	Volt	Kapacitet	Emb.
43512	12V DC	30 ltr./min	1
43524	24V DC	30 ltr./min	1
43530	230V AC	35 ltr./min	1

KABI Electric pump kit for AdBlue®
Incl. manual nozzle and bracket for IBC container

Complete pump kit, IP55 enclosure.
Self-priming pump. Connection 1" BSP.
6 mtr. antistatic hose and fittings.
Duty cycle: continuously.
Self-priming up to 4 mtr. vertically.

Art.#	Volt	Capacity	Quantity
43512	12V DC	30 ltr./min	1
43524	24V DC	30 ltr./min	1
43530	230V AC	35 ltr./min	1


KABI El-pumpesæt for AdBlue®
Inkl. automatisk pistol og beslag til IBC tank

Komplet pumpesæt, IP55 kapsling.
Selvansugende membranpumpe, tilslutning 1"R.
6 mtr. antistatisk slange (til suge og aftapning)
samt fittings. Drifttid: kontinuerligt.
Max. sugehøjde 4 mtr. lodret.

Art.nr.	Volt	Kapacitet	Emb.
43612	12V DC	30 ltr./min	1
43624	24V DC	30 ltr./min	1
43630	230V AC	35 ltr./min	1

KABI Electric pump kit for AdBlue®
Incl. automatic nozzle and bracket for IBC container

Complete pump kit, IP55 enclosure.
Self-priming pump. Connection 1" BSP.
6 mtr. antistatic hose and fittings.
Duty cycle: continuously.
Self-priming up to 4 mtr. vertically.

Art.#	Volt	Capacity	Quantity
43612	12V DC	30 ltr./min	1
43624	24V DC	30 ltr./min	1
43630	230V AC	35 ltr./min	1


KABI El-pumpesæt for AdBlue®
Inkl. automatisk pistol med indbygget digital tæller og beslag til IBC tank

Komplet pumpesæt, IP55 kapsling.
Selvansugende membranpumpe, tilslutning 1"R.
6 mtr. antistatisk slange (til suge og aftapning)
samt fittings. Drifttid: kontinuerligt.
Max. sugehøjde 4 mtr. lodret.

Art.nr.	Volt	Kapacitet	Emb.
43412	12V DC	30 ltr./min	1
43424	24V DC	30 ltr./min	1
43430	230V AC	35 ltr./min	1

KABI Electric pump kit for AdBlue®
Incl. automatic nozzle with built-in digital flow meter and bracket for IBC container

Complete pump kit, IP55 enclosure.
Self-priming pump. Connection 1" BSP.
6 mtr. antistatic hose and fittings.
Duty cycle: continuously.
Self-priming up to 4 mtr. vertically.

Art.#	Volt	Capacity	Quantity
43412	12V DC	30 ltr./min	1
43424	24V DC	30 ltr./min	1
43430	230V AC	35 ltr./min	1



KABI EI-pumpesæt for AdBlue®**Inkl. automatisk pistol, digital flow måler og beslag til IBC tank**

Komplet pumpesæt, IP55 kapsling.
Selvansugende membranpumpe, tilslutning 1"R.
6 mtr. antistatisk slange (til suge og aftapning)
samt fittings. Drifttid: kontinuert.
Max. sugehøjde 4 mtr. lodret.

Art.nr.	Volt	Kapacitet	Emb.
43812	12V DC	30 ltr./min	1
43824	24V DC	30 ltr./min	1
43830	230V AC	35 ltr./min	1

KABI Electric pump kit for AdBlue®**Incl. automatic nozzle, digital flow meter and bracket for IBC container**

Complete pump kit, IP55 enclosure.
Self-priming pump. Connection 1" BSP.
6 mtr. antistatic hose and fittings.
Duty cycle: continuously.
Self-priming up to 4 mtr. vertically.

Art.#	Volt	Capacity	Quantity
43812	12V DC	30 ltr./min	1
43824	24V DC	30 ltr./min	1
43830	230V AC	35 ltr./min	1

**KABI EI-pumpesæt for AdBlue®****med manuel pistol og transportkuffert**

Komplet pumpesæt, IP55 kapsling.
Selvansugende membranpumpe, tilslutning 1"R.
6 mtr. antistatisk slange (til suge og aftapning)
samt fittings. Drifttid: kontinuert.
Max. sugehøjde 4 mtr. lodret.
Sættet leveres i en praktisk transportkuffert.

Art.nr.	Volt	Kapacitet	Emb.
42912	12V DC	30 ltr./min	1
42924	24V DC	30 ltr./min	1
42930	230V AC	35 ltr./min	1

KABI Electric pump kit for AdBlue®**with manual nozzle and transport case**

Complete pump kit, IP55 enclosure.
Self-priming pump. Connection 1" BSP.
6 mtr. antistatic hose and fittings.
Duty cycle: continuously.
Self-priming up to 4 mtr. vertically.
The kit comes in a practical transport case.

Art.#	Volt	Capacity	Quantity
42912	12V DC	30 ltr./min	1
42924	24V DC	30 ltr./min	1
42930	230V AC	35 ltr./min	1

**KABI EI-pumper for AdBlue®**

Løse pumper. Selvansugende membranpumpe
EPDM, IP55 kapsling, tilslutning 1"R, drifttryk 3 Bar
(40 PSI). Max. sugehøjde 4 mtr. lodret.
Drifttid: kontinuert.

Art.nr.	Volt	Kapacitet	Emb.
42012	12V DC	30 ltr./min	1
42024	24V DC	30 ltr./min	1
42030	230V AC	35 ltr./min	1

KABI Electric pump for AdBlue®

Electric pumps. Self-priming diaphragm pump
EPDM, IP55 enclosure, connection 1" BSP,
operating pressure 3 Bar (40 PSI). Self-priming
up to 4 mtr. vertically. Duty cycle: continuously.

Art.#	Volt	Capacity	Quantity
42012	12V DC	30 ltr./min	1
42024	24V DC	30 ltr./min	1
42030	230V AC	35 ltr./min	1

**KABI Membranpumpe med polypropylen hus**

Tryklufddreven pumpe med Teflon® (PTFE) membran. Velegnet til AdBlue® samt aggressive kemiske applikationer såsom opløsningsmidler. Anbefales ikke til brug sammen med petroleumsbaserede medier.

Pumpen er selvansugende, tåler tørkørsel i kortere perioder og tåler nedsækning i væsken.
Pumpen er designet til et indgangstryk på 1,5-7 bar (20-100 PSI). Lufttilslutning er 1/4"R (indv.).


Art.nr.	Gevind	Max. kapacitet	Løftehøjde	Emb.
60810	1/4"	11 l/min.	1,5 mtr.	1
60811	1/2"	45 l/min.	2,5 mtr.	1

KABI Diaphragm pump with polypropylene body

Air driven pump with Teflon® (PTFE) diaphragm. Suitable for use with AdBlue® and other highly aggressive liquids such as solvents etc. Not recommended for use with petroleum-based media. The pump is self priming, can run dry without damage for shorter periods and can be submerged in the liquid.

The design allows an inlet air pressure of 1.5-7 bar (20-100 PSI). Air inlet connection is 1/4" BSP (F).

Art.#	Thread	Max. flow	Suction lift	Quantity
60810	1/4"	11 l/min.	1,5 mtr.	1
60811	1/2"	45 l/min.	2,5 mtr.	1

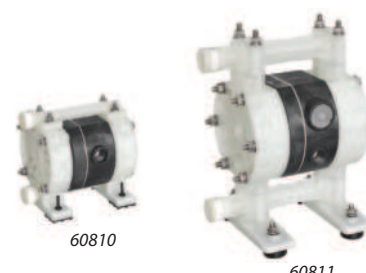

KABI Elektrisk multipumpe

Elektrisk pumpe i PP plast. 2 mtr. udløbsslange og pistol med ø19mm udløbsstuds. IP55 kapsling. To adaptore med Mauser og Trisure gevind medfølger. For 200 ltr. tromle samt 1000 ltr. IBC tank. Pumpen har en støjsvag motor, og er let at transportere.

Sugerørs længde: 850-1245 mm.
Sugerørs max. diameter: ø48 mm.
Spænding: 12V DC eller 230V AC.
Kapacitet: 14 l/min.
Drifttid: Max. 15 min.
Gevind: 2"R (udv).
Pakning: Viton.
Nettovægt: 2,4 kg.

Velegnet til: AdBlue®, vand, frostvæske og sprinklervæske.

Art.nr.	Emb.
40170	1

KABI Electric multipump

Electric pump in PP plastic. 2 mtr. outlet hose and nozzle with ø19mm outlet tube. IP55 enclosure. Two adaptors with Mauser and Trisure thread is included. For 200 ltr. drum and 1000 ltr. IBC tank. The pump is silent in use and easy to transport.

Suction pipe length: 850-1245 mm.
Suction pipe max. diameter: ø48 mm.
Power: 12V DC or 230V AC.
Capacity: 14 l/min.
Operating time: Max. 15 min.
Thread: 2" BSP (M).
Gasket: Viton.
Net weight: 2.4 kg.

Suitable for: AdBlue®, water, antifreeze and windshield washer fluid.

Art.#	Quantity
40170	1

**Akku El-pumpe med genopladeligt batteri**

Elektrisk pumpe med genopladeligt 14,8V Li-Ion batteri. 2 mtr. slange samt pistol med ø15mm udløbsstuds. Inkl. 3 adaptore med Mauser, Trisure og DIN71 gevind. Batteri og lader til 230V AC medfølger.

Sugerørs længde: 575-865 mm
Sugerørs max. diameter: ø38 mm
Batteri: 14,8V
Kapacitet: 18 l/min
Drifttid: Max. 15 min (herefter 30 min. pause)
Gevind: 2"R (udv)
Nettovægt: 1,9 kg

Pumpen er velegnet til:
AdBlue®, Vand, Frostvæske og Sprinklervæske.

Art.nr.	Tæller	Spænding	Pistol	Emb.
40160	Nej	Li-Ion Batteri	Manuel	1
		14,8V / 2,9Ah		

Accu Electric pump with rechargeable battery

Electric pump with rechargeable 14.8V Li-Ion battery. 2 mtr. discharge hose and nozzle with ø15mm outlet tube. Incl. 3 adapters with Mauser, Trisure and DIN71 thread. Battery and charger for 230V AC included.

Suction pipe length: 575-865 mm
Suction pipe max. diameter: ø38 mm
Battery: 14.8V
Capacity: 18 l/min
Duty cycle: Max. 15 min (then 30 min. off)
Thread: 2" BSP (M)
Net weight: 1.9 kg

The pump is suitable for:
AdBlue®, Water, Antifreeze, Windscreen washer fluid.

Art.#	Meter	Power	Nozzle	Quantity
40160	No	Li-ion Battery	Manual	1
		14,8V / 2,9Ah		

**Li-Ion 14,8V / 2,9 Ah batteri**

Batteri til Akku El-pumpe (40160). Indikator lys viser hvor meget spænding der er tilbage i batteriet, når man trykker på check-knappen. Ladetid ca. 3 timer.

Art.nr.	Emb.
44165	1

Li-Ion 14.8V / 2.9 Ah battery

Battery for Accu Electric pump (40160). LED lights indicates how much power is left in the battery, when you push the check button. Charging time is approx. 3 hours.

Art.#	Quantity
44165	1

**KABI AdBlue® antistatisk slange**

Antistatisk slange (EPDM), 3/4" (ø19mm).

Art.nr.	Længde	Emb.
42136	6 meter	1
42137	Sælges pr. meter	

KABI AdBlue® antistatic hose

Antistatic hose (EPDM), 3/4" (ø19mm).

Art.#	Length	Quantity
42136	6 meter	1
42137	Sold per meter	



KABI AdBlue® manuel pistol

Ø20mm slangetilslutning. Ø19mm udløbsstuds.

Art.nr.	Mængde	Tilslutning	Emb.
42100	50 ltr./min	Uden swivel	1

KABI AdBlue® manual nozzle

Ø20mm hose connection. Ø19mm outlet tube.

Art.#	Capacity	Connection	Quantity
42100	50 ltr./min	Without swivel	1

**KABI AdBlue® automatisk pistol**

Ø20mm slangetilslutning. Ø19mm udløbsstuds.

Art.nr.	Mængde	Tilslutning	Emb.
42110	50 ltr./min	Med swivel	1

KABI AdBlue® automatic nozzle

Ø20mm hose connection. Ø19mm outlet tube.

Art.#	Capacity	Connection	Quantity
42110	50 ltr./min	With swivel	1

**KABI AdBlue® automatisk pistol i PP**

3/4" slangetilslutning. Ø19mm udløbsstuds.

Art.nr.	Mængde	Tilslutning	Emb.
42109	50 ltr./min	Med swivel	1

KABI AdBlue® automatic nozzle in PP

3/4" hose connection. Ø19mm outlet tube.

Art.#	Capacity	Connection	Quantity
42109	50 ltr./min	With swivel	1

**KABI AdBlue® automatisk pistol**3/4" slangetilslutning. Ø15mm udløbsstuds.
Giver minimum 5 ltr./min og max. 15 ltr./min.

Art.nr.	Mængde (min.-max.)	Tilslutning	Emb.
42107	5-15 ltr./min	Med swivel	1

KABI AdBlue® automatic nozzle3/4" hose connection. Ø15mm outlet tube.
Min. flow is 5 ltr./min and max. flow is 15 ltr./min.

Art.#	Capacity (min.-max.)	Connection	Quantity
42107	5-15 ltr./min	With swivel	1

**KABI AdBlue® automatisk pistol m/digital tæller**

Ø20mm slangetilslutning. Inkl. Ø19mm og Ø15mm udløbsstuds. Max. tryk: 3,5 bar. Digitalt display.

Art.nr.	Mængde (min.-max.)	Tilslutning	Emb.
42106	15-45 ltr./min	Med swivel	1

KABI AdBlue® automatic nozzle w/digital meter

Ø20mm hose connection. Incl. Ø19mm and Ø15mm outlet tubes. Max. pressure: 3.5 bar. Digital display.

Art.#	Capacity (min.-max.)	Connection	Quantity
42106	15-45 ltr./min	With swivel	1

**KABI AdBlue® automatisk pistol med magnet**

Ø19mm udløbsstuds. Tilslutning: Indv. 3/4"R.

Art.nr.	Mængde	Emb.
42111	50 ltr./min	1

KABI AdBlue® automatic nozzle with magnet

Ø19mm outlet tube. Connection: 3/4" BSP (F).

Art.#	Capacity	Quantity
42111	50 ltr./min	1

**Magnet til KABI AdBlue® automatisk pistol**

Passer til art.nr. 42111.

Art.nr.	Emb.
42112	1

Magnet for KABI AdBlue® automatic nozzle

For art.# 42111.

Art.#	Quantity
42112	1

**AdBlue® digital flow måler**Digital flow måler, 1-30 liter pr. minut.
Nøjagtighed: +/- 0,5%. IP65 kapsling.
Tilslutning: 1/2"R.

Art.nr.	Emb.
42153	1

AdBlue® digital flow meterDigital flow meter, 1-30 litres per minute.
Accuracy: +/- 0.5%. IP65 enclosure.
Connection: 1/2" BSP.

Art.#	Quantity
42153	1



KABI AdBlue® pumpe beslag

Art.nr.		Emb.
42166	Beslag for IBC tank	1
42167	Beslag for fad, 60-208 ltr.	1
42168	Holder til pistol	1
42166-V	Vægbeslag for 42166	1
42173	Beslag for transportvogn 40328	1

KABI AdBlue® pump brackets

Art.#		Quantity
42166	Bracket for IBC container	1
42167	Bracket for drum, 60-208 ltr.	1
42168	Nozzle holder	1
42166-V	Wall bracket for 42166	1
42173	Bracket for trolley 40328	1


KABI AdBlue® sugerør

For 200 ltr. tromler samt 1000 ltr. IBC tanke.
Gevind: Trisure (M56x4).

Art.nr.	Dele	Længde	Emb.
42115	3	350-1025mm	1
42121S	1	1040mm	1

KABI AdBlue® suction tube

For 200 ltr. drums and 1000 ltr. IBC containers.
Thread: Trisure (M56x4).

Art.#	Pieces	Length	Quantity
42115	3	350-1025mm	1
42121S	1	1040mm	1


KABI Toplåg til IBC 150mm

Inkl. midterhul med 2"R (indv.) gevind.

Art.nr.	Emb.
96138	1

KABI Cover lid for IBC 150mm

Incl. center hole with 2" BSP (F) thread.

Art.#	Quantity
96138	1


KABI Aftapningstud for IBC tank

Med låg. Tilslutning: M60x6.

Art.nr.	Emb.
41162	1

KABI Spout for IBC tank

With cover. Connection: M60x6.

Art.#	Quantity
41162	1


KABI Adaptere

Art.nr.	Gevind
96030	2" R. Indv. – Mauser Udv.
96031	2" R. Indv. – Trisure Udv.
96032	2" R. Indv. – Din 61 Indv.
96033	2" R. Indv. – Din 51 Indv.
96034	2" R. Indv. – 63 mm Indv.
96035	2" R. Indv. – Din 71 Indv.
96036	2" R. Indv. – Din 61 Udv.
96037	Mauser Indv. – Trisure Udv.
96038	2" R. Udv. – Din 61 Udv.
96040	M56x4 Indv. – M70x6 Udv.
96041	2" R Udv. – M56x4 Indv.
96042	2" R Indv. – 2" R Udv.

KABI Adapters

Art.#	Thread
96030	2" BSP (F) – Mauser (M)
96031	2" BSP (F) – Trisure (M)
96032	2" BSP (F) – Din 61 (F)
96033	2" BSP (F) – Din 51 (F)
96034	2" BSP (F) – 63 mm (F)
96035	2" BSP (F) – Din 71 (F)
96036	2" BSP (F) – Din 61 (M)
96037	Mauser (F) – Trisure (M)
96038	2" BSP (M) – Din 61 (M)
96040	M56x4 (F) – M70x6 (M)
96041	2" BSP (M) – M56x4 (F)
96042	2" BSP (F) – 2" BSP (M)


KABI AdBlue® fittings

Art.nr.	
42158	Bundfilter 3/4" slangestuds
42159	Rustfri muffe 1"R(indv.) – 1"R(indv.)
42160	1"R(indv.) – 3/4" slangestuds
42161	Nippel 3/4"R(udv.) – 3/4"R(udv.)
42162	3/4"R(udv.) – 3/4" slangestuds
42163	90° 1"R(indv.) – 1"R(indv.)
42164	90° 1"R(udv.) – 1"R(indv.)
42165	Rustfri swivel 3/4"R(udv.) – 3/4" (ø19mm) slangestuds
42118	Swivel adaptor DIN 61 – 3/4" slangestuds
42119	Swivel adaptor DIN 61 – 1" slangestuds
42122	Adaptor M60x6 - 3/4" slangestuds
42132	SEC kobling med slangestuds

KABI AdBlue® fittings

Art.#	
42158	Strainer 3/4" hose connection
42159	Stainless fitting 1"BSP(F) – 1"BSP(F)
42160	1"BSP(F) – 3/4" hose connection
42161	3/4"BSP(M) – 3/4"BSP(M)
42162	3/4"BSP(M) – 3/4" hose connection
42163	90° 1"BSP(F) – 1"BSP(F)
42164	90° 1"BSP(M) – 1"BSP(F)
42165	Stainless swivel 3/4"BSP(M) – 3/4" (ø19mm) hose connection
42118	Swivel adapter DIN 61 – 3/4" hose connection
42119	Swivel adapter DIN 61 – 1" hose connection
42122	Adapter M60x6 - 3/4" hose connection
42132	SEC suction connection



KABI AdBlue® rotationspumpe kit

Rotationspumpe i PP plast, 3 mtr. udløbsslange med rustfrit udløbsrør, ø19mm. 3-delt sugerør til brug for 50-205 ltr. tromler.

Fadforskrining: 2"R, Trisure og Mauser.

Kapacitet: ca. 0,3 ltr. pr. omgang.

Art.nr. Emb.

40190 1

KABI AdBlue® rotary pump set

Rotary pump in PP plastic, 3 mtr. hose with outlet of stainless steel, ø19mm. 3-part suction tube for 50-205 ltr. drums.

Bung adapter: 2" BSP, Trisure and Mauser.

Capacity: approx. 0.3 ltr. per round.

Art.# Quantity

40190 1

**KABI AdBlue® vægtstangspumpe**

Med 3-delt teleskoprør for 60-200 ltr. tromler samt 1000 ltr. IBC tanke. Inkl. Trisure og Mauser adaptere (40174A er også inkl. adapter til 60 ltr. dunke).

2 mtr. slange med ø19mm udløbsrør.

Kapacitet: ca. 0,5 ltr. pr. slag. Pakning: Viton.

Velegnet til: AdBlue®, Urea, vand, sprinklervæske og antifrost væsker.

Art.nr. Komplet pumpesæt for Emb.

40174A 1000 L - 200 L - 60 L 1

KABI AdBlue® lever pump

With telescopic tube in 3 parts, for 60-200 ltr. drums and 1000 ltr. IBC containers. Incl. Trisure and Mauser adaptors (40174A also incl. adaptor for 60 ltr. cans).

2 mtr. hose, ø19mm outlet tube.

Capacity: approx. 0.5 ltr. per stroke. Gasket: Viton.

Suitable for: AdBlue®, Urea, water, windshield washer fluid and antifreeze.

Art.# Complete pump kit for Quantity

40174A 1000 L - 200 L - 60 L 1

**KABI AdBlue® dræneringskit for IBC bundventil**

En simpel løsning til overførsel af AdBlue® fra en IBC tank, når en pumpe ikke er nødvendig. Tilslutning via bundventil. Inkl. 3 mtr. slange og manuel pistol. Swivel adapter: DIN61 (42118).

Art.nr. Emb.

42145 1

KABI AdBlue® gravity kit for IBC bottom outlet

A simple solution for the transfer of AdBlue® from an IBC, when a pump is not needed. Bottom outlet connection. Incl. 3 mtr. hose and manual nozzle. Swivel adapter: DIN61 (42118).

Art.# Quantity

42145 1



Centralsmøring

Central lubrication



Elektriske fedtpumper
Electric grease pumps

130

Påfyldningssprøjte – Fedtfylder – Tilbehør
Filling pump – Grease filler pump – Accessories

131

Fordelerblokke – Smøreblokke – Fittings – Højtryksslanger
Distributors – Manifolds – Fittings – High pressure hoses

132

Elektriske oliepumper – Oliefordelere – Fittings
Electric oil pumps – Oil injectors – Fittings

135

DELIMON FZA-pumpe

FZA pumpen er primært designet til direkte smøring, af op til 12 smøresteder. FZA pumpens pumpehoved gør det muligt at justere volumen individuelt pr. udgang. Pumpehovedet fås med 1-6 udgange eller 1-12 udgange. FZA pumpen er typisk drevet af en flange monteret motor. En bred vifte af udvekslingsforhold, gør at FZA pumpen kan imødekomme en mangfoldighed af smørekraft.

Art.nr.	Udg. / Beholder	Udveksl.	Emb.
DEFZA06A10AA00	6 / 8,0 Ltr.	215:1	1
DEFZA06A11AA00	6 / 8,0 Ltr.	345:1	1
DEFZA06A31AA00	6 / 8,0 Ltr.	710:1	1
DEFZA12A10AA00	12 / 8,0 Ltr.	215:1	1
DEFZA12A11AA00	12 / 8,0 Ltr.	345:1	1
DEFZA12A31AA00	12 / 8,0 Ltr.	710:1	1

Anden udveksling kan skaffes.

DELIMON FZA-pump

The FZA pump is designed primarily for direct lubrication (up to 12 lubrication points). The FZA pump's pump head allows you to adjust lubricants individually per. output. The pump head is available with outputs 1-6 or 1-12 outputs. The FZA pump is typically driven by a flange mounted motor. A wide range of gear ratios and containers are available, which enables the FZA pump to be customized to a variety of machine requirements.

Art.#	Outlet / Cont.	Ratios	Quantity
DEFZA06A10AA00	6 / 8,0 Ltr.	215:1	1
DEFZA06A11AA00	6 / 8,0 Ltr.	345:1	1
DEFZA06A31AA00	6 / 8,0 Ltr.	710:1	1
DEFZA12A10AA00	12 / 8,0 Ltr.	215:1	1
DEFZA12A11AA00	12 / 8,0 Ltr.	345:1	1
DEFZA12A31AA00	12 / 8,0 Ltr.	710:1	1

Other ratios can be obtained.

**Motor og tilslutnings dele til FZA pumpe**

Art.nr.		Emb.
DE74354-5631	Motorflange for FZA	1
DE71931-1593	Kobling FZA (Hun)	1
DE71931-1513	Kobling FZA (Han)	1
CS121294	Motor 3x400V, 0,18Kw, 1500, IP55, B14	1

Connecting parts and motor for FZA pumps

Art.#		Quantity
DE74354-5631	Motor Flange for FZA	1
DE71931-1593	Coupling FZA (F)	1
DE71931-1513	Coupling FZA (M)	1
CS121294	Motor 3x400V, 0,18Kw, 1500, IP55, B14	1

**12V DC eller 24V DC fedtpumpe CSKPT**

Pumpen er udviklet og designet til at tjene som en multi-funktions smørepumpe. Pumpen fås med og uden indbygget timer/controle. Takket være den enkle konstruktion kan denne pumpe bruges i industrien og til køretøjssmøring så som landbrugs-maskiner og entreprenør udstyr. Pumpen kan forsynes med op til 3 stk. pumpeelementer og beholdere i fire størrelser 1,0kg, 2,5kg, 4,5kg og 8,0kg. Smøremiddel: fedt, flydende fedt op til NLGI-klasse 2. Arbejdstryk: max. 300 bar.

Art.nr. / Art.#	Pumpeelementer / Pump elements	Beholder / Container	Timer / Timer	Volt / Volt	Emb. / Quantity
CSKPT12-1,0	1	1,0 Ltr.	Ja / Yes	12V DC	1
CSKPT12-2,5	1	2,5 Ltr.	Ja / Yes	12V DC	1
CSKPT24-2,5	1	2,5 Ltr.	Ja / Yes	24V DC	1
CSKPL24-2,5	1	2,5 Ltr.	Nej / No	24V DC	1

Pumpeelement med 2,4 cm³/min

Art.nr.	Arbejdstryk	Emb.
CSP503	300 bar	1

12V DC and 24V DC grease pump CSKPT

The pump is designed to serve as a multi-function lubrication pump. The pump is available with or without a built-in timer/controller. Thanks to its simple design, this pump can be used in industrial, commercial vehicle lubrication, agricultural machinery and construction equipment. The pump can be equipped with up to 3 pump elements and containers in four sizes 1.0 kg, 2.5 kg, 4.5 kg and 8.0 kg. Lubricant: grease, liquid grease up to NLGI grade 2. Working pressure: max. 300 bar.

Pump element with 2.4 cm³/min

Art.#	Working pressure	Quantity
CSP503	300 bar	1

**Blokeringsindikator med overtryksventil**

Art.nr.	Emb.
CSKB592032	1

Blocking indicator with return hose

Art.#	Quantity
CSKB592032	1

**Kompakt fedtpumpe**

Den lille pumpe med de store muskler. Kræver ikke meget plads og gør det nu muligt at få centralsmøring til mindre maskiner hvor pladsen er begrænset. Højde: 29 cm. Dybde: 7,5 cm. Længde: 13,5 cm. Reservoir: 675 cc. Tryk: max 200 bar. Til 12 eller 24 V DC. Antal udgange: 1.

Art.nr.	Spænding	Emb.
CSKP1225	12V DC	1
CSKP2425	24V DC	1

Tilbehør

Art.nr.	Beholder 675cc	Emb.
CSKB1225		1

Compact grease pump

The small pump with big muscles. Does not require much space and makes central lubrication possible for smaller machines where space is limited. Height: 29 cm. Depth: 7.5 cm. Length: 13.5 cm. Reservoir: 675 cc. Pressure: max 200 bar. For 12 or 24 V DC. Number of outlets: 1.

Art.#	Power	Quantity
CSKP1225	12V DC	1
CSKP2425	24V DC	1

Accessories

Art.#	Container 675cc	Quantity
CSKB1225		1



Påfyldningssprøjte

Inkl. påfyldningsadaptor CS100-204.
Indeholder 400 gr.

Art.nr.	Emb.
CS100-201	1

Filling pump

Incl. filling adapter CS100-204.
Contains 400 gr.

Art.#	Quantity
CS100-201	1

**Påfyldningsadaptor for CS100-201**

Gevind M26x1,5.

Art.nr.	Emb.
CS100-204	1

Filling adapter for CS100-201

Thread M26x1.5.

Art.#	Quantity
CS100-204	1

**Påfyldningsadaptor**

Skrues fast på selve pumpen.
Kan bruges på disse pumper: Vogel/SKF/Delimon.

Art.nr.	Gevind	Emb.
CS100-200	M20 x 1,5	1
CS100-208	M22 x 1,5	1

Filling adapter

For mounting directly on to the pump. Can be used on these pumps: Vogel/SKF/Delimon.

Art.#	Thread	Quantity
CS100-200	M20 x 1.5	1
CS100-208	M22 x 1.5	1

**Påfyldningssprøjte uden påfyldningsadaptor**

Indeholder 400 gr.

Art.nr.	Emb.
CS100-203	1

Filling pump without filling adapter

Contains 400 gr.

Art.#	Quantity
CS100-203	1

**Påfyldningsadaptor, gevind M22x1,5**

Passer til Lincoln pumper.

Art.nr.	Emb.
CS100-202	1

Filling adapter, M22x1,5

To be used on Lincoln pumps.

Art.#	Quantity
CS100-202	1

**Fedtfylder for centralsmøring**

Fedtfylder for hurtig, sikker og ren påfyldning
af fedtbeholdere til centralsmøring.

Kapacitet: 40 gram pr. pumpe slag.
Tromlestr.: 18-20 kg.
Leveres med: pumpe, låg ø280-320mm og 1,5 mtr.
slange med påfyldningsadaptor CS100-205.
Passer til adaptor modpart CS100-206.

Art.nr.	Emb.
4020721	1

Grease Filler Pump for Central Lubrication

A grease filler pump for quick, safe and clean filling
into the grease container of central lubrication.

Capacity: 40 gram per stroke.
Barrel size: 18-20 kg.
Supplied with: pump, cover ø280-320mm and
1.5 mtr. hose with filling adapter CS100-205.
Fits adapter counterpart CS100-206.

Art.#	Quantity
4020721	1

**Påfyldningsadaptor, 1/4"R**


Adaptor inkl. støvhætte.

Art.nr.	Tilslutning	Emb.
CS100-205	Indvendig	1
CS100-206	Udvendig	1

Filling adapter, 1/4" BSP

Adaptor incl. dust cap.

Art.#	Connection	Quantity
CS100-205	Female	1
CS100-206	Male	1



Fordelerblok for smørefedt DL-XS

Den progressive fordele DL-XS er en kompakt fordele, designet efter de højeste krav. Fordeleren er en segment-fordeler som gør det muligt at tilpasse mængden af smøremiddel til de enkelte smøresteder. Segment design med fire volume størrelser sikrer fleksibilitet. Elementerne fås fra 25mm³ til 105mm³.

Antal segmenter: Min 3 til maks. 12.

Arbejdsstryk: 15 bar til 300 bar.

Stempelslag pr minut: Max. 300.

Gevind tilslutning: M10x1,0. Gevind udg.: M10x1,0.

Progressive distributor DL-XS

The progressive distributor DL-XS is a compact distributor designed according to the highest standards. The distributor is a segment distributor which makes it possible to adjust the amount of lubricant to the individual lubrication point. There are four sizes of segments which makes the design of the distributor very flexible. The elements can be obtained from 25mm³ to 105mm³.

Number of piston segments: Min 3 to max 12.

Working pressure: 15 bar to 300 bar.

Piston strokes per minute: Max. 300.

Thread inlet: M10x1,0. Thread outlet: M10x1,0.



Art.nr. / Art.#

Emb. / Quantity

CSDLXSI	Start element DL-XS / Start element DL-XS	1
CSDLXSE	Slut element DL-XS / End element DL-XS	1
CSDLXS025	DL-XS dosserings element 0,025ccm / DL-XS dossering element 0,025ccm	1
CSDLXS045	DL-XS dosserings element 0,045ccm / DL-XS dossering element 0,045ccm	1
CSDLXS075	DL-XS dosserings element 0,075ccm / DL-XS dossering element 0,075ccm	1
CSDLXS105	DL-XS dosserings element 0,105ccm / DL-XS dossering element 0,105ccm	1

Kontraventil til udgangen af DL-XS fordele


Komplet kontraventil med omløber og skærering.

Art.nr.	Emb.
CSKV0603158	1

Non return valve for DL-XS distributor

Complete non return valve with nut & cutting ring.

Art.#	Quantity
CSKV0603158	1

**Smøreblok**

Smøreblokken gør det muligt at flytte op til 5 smøresteder til et samlet sted. Tilslutning: M10x1,0.

Art.nr.	Smøresteder	Emb.
CS200-001	1	1
CS200-002	2	1
CS200-003	3	1
CS200-004	4	1
CS200-005	5	1

Manifold

The grease manifold allows you to move up to 5 lubpoints to a single place. Thread: M10x1,0.

Art.#	Lubpoints	Quantity
CS200-001	1	1
CS200-002	2	1
CS200-003	3	1
CS200-004	4	1
CS200-005	5	1

**Lige forskrning ø6 - DIN 2353**

Lige forskrning for ø6, inkl. omløber og skærering.

Art.nr.	Gevind	Nøglevidde 1 / 2	Emb.
CS0603112	M6x1,0	11mm / 12mm	1
CS0603132	M8x1,0	11mm / 12mm	1
CS0603134	M8x1,25	11mm / 12mm	1
CS0603158	M10x1,0	11mm / 12mm	1
CS0603152	1/8"R	11mm / 12mm	1
CS0603152NPT	1/8"NPT	11mm / 12mm	1
CS0603162	1/4"R	14mm / 14mm	1

Straight fitting ø6 - DIN 2353

Straight fitting for ø6, incl. nut and cutting ring.

Art.#	Thread	SW 1 / SW 2	Quantity
CS0603112	M6x1.0	11mm / 12mm	1
CS0603132	M8x1.0	11mm / 12mm	1
CS0603134	M8x1.25	11mm / 12mm	1
CS0603158	M10x1.0	11mm / 12mm	1
CS0603152	1/8"BSP	11mm / 12mm	1
CS0603152NPT	1/8"NPT	11mm / 12mm	1
CS0603162	1/4"BSP	14mm / 14mm	1

**90° forskrning ø6 - DIN 2353**

90° forskrning for ø6, inkl. omløber og skærering.

Art.nr.	Gevind	Nøglevidde 1 / 2	Emb.
CS0603312	M6x1,0	11mm / 12mm	1
CS0603332	M8x1,0	11mm / 12mm	1
CS0603334	M8x1,25	11mm / 12mm	1
CS0603358	M10x1,0	11mm / 12mm	1
CS0603373	M14x1,5	11mm / 12mm	1
CS0603352	1/8"R	11mm / 12mm	1
CS0603252NPT	1/8"NPT	11mm / 12mm	1
CS0603362	1/4"R	14mm / 14mm	1

90° fitting ø6 - DIN 2353

90° fitting for ø6, incl. nut and cutting ring.

Art.#	Thread	SW 1 / SW 2	Quantity
CS0603312	M6x1.0	11mm / 12mm	1
CS0603332	M8x1.0	11mm / 12mm	1
CS0603334	M8x1.25	11mm / 12mm	1
CS0603358	M10x1.0	11mm / 12mm	1
CS0603373	M14x1.5	11mm / 12mm	1
CS0603352	1/8"BSP	11mm / 12mm	1
CS0603252NPT	1/8"NPT	11mm / 12mm	1
CS0603362	1/4"BSP	14mm / 14mm	1

**T-stykke**

T-stykke med omløber og skærering.

Art.nr.	Dia.	Nøglevidde 1 / 2	Emb.
CS060606	ø6mm	11mm / 12mm	1

T-connector

T-connector, incl. nut and cutting ring.

Art.#	Dia.	SW 1 / SW 2	Quantity
CS060606	ø6mm	11mm / 12mm	1



Banjo forskrunding

Banjo forskrunding for ø6, inkl. omløber & skæring.

Art.nr.	Gevind	Nøglevidde 1 / 2	Emb.
CS0602152	1/8"R	14mm / 12mm	1

Elbow banjo movable fitting

Banjo fitting for ø6, incl. nut and cutting ring.

Art.#	Thread	SW 1 / SW 2	Quantity
CS0602152	1/8" BSP	14mm / 12mm	1

**Banjo forskrunding Type L**

Banjo forskrunding.

Art.nr. / Art.#	Gevind 1 / Thread 1	Gevind 2 / Thread 2	Gevind 3 / Thread 3	Nøglevidde / SW	Emb. / Quantity
CS0602458	M10x1,0	M10x1,0	M10x1,0	14mm	1

Elbow banjo Type L

Banjo fitting.

**Højtryksslange, DN04 og DN06**

Højtryksslangen er ekstremt modstandsdygtig over for tryk, men bevarer dog en meget høj fleksibilitet. Sprængningstryk: 840bar (12180PSI).

DN04

Indre dia: ø4,0mm - Ydre dia: ø8,6mm.

Art.nr.	Fedtfyldt	Emb.
CSH08,75	Nej	50 mtr.
CSH08,75F	Ja	50 mtr.

High pressure hose, DN04 and DN06

The high pressure hose is extremely resistant to pressure, while still retaining a very high flexibility. Burst pressure: 840bar (12180PSI).

DN04

Inner dia: ø4.0 mm - Outer dia: ø8.6 mm.

Art.#	Grease filled	Quantity
CSH08,75	No	50 mtr.
CSH08,75F	Yes	50 mtr.

**DN06**

Indre dia: ø6,4mm - Ydre dia: ø11,3mm.

Art.nr.	Fedtfyldt	Emb.
CSH11,30	Nej	50 mtr.
CSH11,30F	Ja	50 mtr.

DN06

Inner dia: ø6.4mm - Outer dia: ø11.3mm.

Art.#	Grease filled	Quantity
CSH11,30	No	50 mtr.
CSH11,30F	Yes	50 mtr.

Rørstuds til højtryksslange model DN04 & DN06**DN04 - ø6mm**

Art.nr.	Type	L2	Nøglevidde	Emb.
CS087503160	Lige		10mm	1
CS087503361	45°		10mm	1
CS087503360	90°	21mm	10mm	1
CS087503362	90°	35mm	10mm	1
CS087503363	180°		10mm	1

Screw Stub tube for high pressure hose DN04 & DN06**DN04 - ø6mm**


Art.#	Model	L2	SW	Quantity
CS087503160	Straight		10mm	1
CS087503361	45°		10mm	1
CS087503360	90°	21mm	10mm	1
CS087503362	90°	35mm	10mm	1
CS087503363	180°		10mm	1

**DN06 - ø8mm**

Art.nr.	Type	L2	Nøglevidde	Emb.
CS113003160	Lige		12mm	1
CS11300822	Lige		12mm	1
CS11300835	90°	33mm	12mm	1

DN06 - ø8mm

Art.#	Model	L2	SW	Quantity
CS113003160	Straight		12mm	1
CS11300822	Straight		12mm	1
CS11300835	90°	33mm	12mm	1

**Omløber til rørstuds model DN04 & DN06****DN04 - ø6mm**

Art.nr.	L1	L2	Nøglevid.	Emb.
CS087503000	28mm	19mm	12mm	1

Nut for stub tube DN04 & DN06**DN04 - ø6mm**


Art.#	L1	L2	SW	Quantity
CS087503000	28mm	19mm	12mm	1

DN06 - ø8mm

Art.nr.	L1	L2	Nøglevid.	Emb.
CS113003000	36mm	28mm	17mm	1

DN06 - ø8mm

Art.#	L1	L2	SW	Quantity
CS113003000	36mm	28mm	17mm	1



Viklefleks

Art.nr.	Emb.
CSV100-021	50 mtr.

Rørbøjle DIN 3016

Gummi belagt rørbøjle.
Indre dia: ø5,3mm - Ydre dia: ø9,0mm.

Art.nr.	Emb.
CSRSU9	1

Protective helix

Art.#	Quantity
CSV100-021	50 mtr.

Clip DIN 3016

Clip with rubber.
Inner dia: ø5,3mm - Outer dia: ø9,0mm.

Art.#	Quantity
CSRSU9	1



CSV100-021



CSRSU9

Højtryksslange spiral model DN04

Højtryksslangen er ekstremt modstandsdygtig over for tryk, men bevarer dog en meget høj fleksibilitet. Sprængningstryk: 840bar (12180PSI). Indre dia: ø4,0mm - Ydre dia: ø8,6mm.

Art.nr.	Fedtfyldt	Emb.
CSH08,75S	Nej	25 mtr.

High pressure hose colide DN04

The high pressure hose is extremely resistant to pressure, while still retaining a very high flexibility. Burst pressure: 840bar (12180PSI). Inner dia: ø4.0 mm - Outer dia: ø8.6 mm.

Art.#	Grease filled	Quantity
CSH08,75S	No	25 mtr.

**Fittings ø6 i sortimentsboks**

Sortimentsboks bestående af forskruninger ø6mm samt rørstudse ø6mm for højtryksslange 8,75.

Forskrninger:	Rørstudse:
6 stk. lige, M6x1	10 stk. 90°, kort
2 stk. lige, M8x1	6 stk. 90°, lang
5 stk. lige, M10x1	10 stk. lige
10 stk. lige, 1/8"	
8 stk. 90°, 1/8"	Andet:
2 stk. 90°, 1/4"	10 stk. union-samlestykke
6 stk. 90°, M6x1	10 stk. omløber for rørstud
8 stk. 90°, M10x1	10 stk. omløber, M10x1
2 stk. banjo, U 1/8"R	10 stk. skærring

Art.nr.	Emb.
CS1200	1

Fittings kit ø6

Box with fittings ø6mm and stub tubes ø6mm for high pressure hose 8.75.

Fittings:	Stub tubes:
6 pcs. straight, M6x1	10 pcs. 90°, short
2 pcs. straight, M8x1	6 pcs. 90°, long
5 pcs. straight, M10x1	10 pcs. straight
10 pcs. straight, 1/8"	
8 pcs. 90°, 1/8"	Others:
2 pcs. 90°, 1/4"	10 pcs. union-connector
6 pcs. 90°, M6x1	10 pcs. nut for stub tube
8 pcs. 90°, M10x1	10 pcs. nut, M10x1
2 pcs. banjo, U 1/8"BSP	10 pcs. cutting ring

Art.#	Quantity
CS1200	1

**Polyamid slange DIN 73378**

Sort semiflexibel slange, ydre dia. ø6mm. Sprængningstryk: 280bar (4061PSI). Indre dia: ø3,0mm - Ydre dia: ø6,0mm.

Art.nr.	Fedtfyldt	Emb.
BI6N3	Nej	50 mtr.
CSD6N3	Ja	50 mtr.

Polyamid hose DIN 73378

Black semi-rigid hose, outer dia. ø6,0mm. Burst pressure 280bar (4061PSI). Inner dia: ø3,0mm - Outer dia: ø6,0mm.

Art.#	Grease filled	Quantity
BI6N3	No	50 mtr.
CSD6N3	Yes	50 mtr.



BI6N3

Indsatsrør for ø6mm slange

Art.nr.	Emb.
BIAR629	1

Reinforcing socket for ø6mm hose

Art.#	Quantity
BIAR629	1



BIAR629

SureFire PDI automatisk smøreapparat

En robust og holdbar pumpe, der kan håndtere olie og blødt fedt. Den kompakte størrelse og designet er tilpasset til din plads- og smørekraft. SureFire PDI smøreapparat er en selvstændig elektrisk motordrevet tandhjulspumpe, der er tilpasset til en bred vifte af produktionsmaskiner. Den kan håndtere enkelte injektorer eller injektor grupper, og kan betjene op til 100 smøresteder.

- Håndterer olie og flydende fedt
- Tom melder for fejlsikker drift
- Udgang på begge sider af pumpen
- Quick-snap reservoir
- Praktisk plug-in type klemrække
- Stort påfyldningsdæksel med indbygget si
- Valgfri controller/monitor

Art.nr.	Beholder	Timer	Model	Emb.
BISF2BNAB	1,8 ltr.	Nej	24Vdc	1
BISF2BNAD	1,8 ltr.	Nej	230V	1
BISF3BNAD	2,7 ltr.	Nej	230V	1
BISF3BNCD	2,7 ltr.	Ja	230V	1
BISF6BNDE	6,0 ltr.	Nej	380V	1

SureFire PDI automatic lubricator

A rugged and durable pump that can handle oil and soft grease. Its compact size is designed to fit your space requirements and lubrication requirements. SureFire PDI lubricator is a self-contained electric motor-driven gear pump, that can adapt to a wide range of manufacturing machinery. It may handle individual injectors or injector groups, serving up to 100 lubrication points.

- Handling oil and liquid grease
- Low level switch for failsafe operation
- Output on either side of the pump
- Quick-snap reservoir
- Convenient plug-in type terminal block
- Large filler cap with built-in strainer
- Optional controller/monitor

Art.#	Container	Controller	Type	Quantity
BISF2BNAB	1.8 ltr.	No	24Vdc	1
BISF2BNAD	1.8 ltr.	No	230V	1
BISF3BNAD	2.7 ltr.	No	230V	1
BISF3BNCD	2.7 ltr.	Yes	230V	1
BISF6BNDE	6.0 ltr.	No	380V	1

**TM-1 Oliepumpe**

TM-1 olie pumpen bruges i helt enkle central smøresystemer. Disse systemer udnytter cyklus levering af olie til enkelte smøresteder.

TM-1 pumpen er en motordrevet, fjederbelastet stempelpumpe som gør det muligt også at smøre manuelt.

Motoren kører via en gearreduktion som bestemmer cyklus for smøring.

Art.nr.	Beholder	Tid	Model	Emb.
BIC2798	0,5 ltr.	2 min	220V	1
BIC2896	0,5 ltr.	9 min	220V	1
BID3096	1,0 ltr.	8 min	220V	1

TM-1 Oil pump

TM-1 oil pump is used in single-line centralized lubrication systems. These systems utilize cycle supply of oil discharged to the lubrication points.

Art.#	Container	Time	Type	Quantity
BIC2798	0.5 ltr.	2 min	220V	1
BIC2896	0.5 ltr.	9 min	220V	1
BID3096	1.0 ltr.	8 min	220V	1

**TDM-5**

TDM-5 pumpen er lille og kompakt pumpe ideel til små maskiner. Kan håndtere fra 1-50 smøresteder.

TDM-5 pumpen er en motordrevet, fjederbelastet stempelpumpe som gør det muligt også at smøre manuelt. Motoren kører via en gearreduktion som bestemmer cyklus for smøring.

Art.nr.	Beholder	Tid	Model	Emb.
BI263502	2,0 ltr.	11 min	220V	1
BI263504	2,0 ltr.	33 min	220V	1
BI263505	2,0 ltr.	64 min	220V	1
BI263506	2,0 ltr.	128 min	220V	1

TDM-5

TDM-5 pump is small and kompact pump ideal for small machines. Can handle from 1-50 lubrication points. The TDM-5 pump is a motor-driven, piston pump which makes it possible to lubricate manually. Motor drive via a reduction gear which provides cycle for lubrication.

Art.#	Container	Time	Type	Quantity
BI263502	2.0 ltr.	11 min	220V	1
BI263504	2.0 ltr.	33 min	220V	1
BI263505	2.0 ltr.	64 min	220V	1
BI263506	2.0 ltr.	128 min	220V	1



ZEM oliefordeler PDI

ZEM Oliefordeler leveres med forudindstillet olie-kammer, der leverer præcis og kontrolleret smøring til hver udgang. Det faste olie-kammer er med til at sikre hvert smørested modtager den korrekte mængde smøremiddel.

Tilslutning: M10 x 1,0.

Udgang: Push to connect.

Art.nr.	Udg.	Mængde / ccm ³	Emb.
BIZEM342PAC	2	0,01 og 0,06	1
BIZEM342PCC	2	(2x) 0,06	1
BIZEM342PAA	2	(2x) 0,01	1
BIZEM343PCCC	3	(3x) 0,06	1
BIZEM345PAAAAA	5	(5x) 0,01	1

ZEM oil injector PDI

ZEM Oil injector delivered with pre-fixed oilinjector, delivering accurate and controlled lubrication for each output. The fixed injector helps to ensure each lubrication point receives the correct amount of lubricant.

Connection: M10 x 1,0.

Output: Push to connect.

Art.#	Outlets	Output / ccm ³	Quantity
BIZEM342PAC	2	0,01 and 0,06	1
BIZEM342PCC	2	(2x) 0,06	1
BIZEM342PAA	2	(2x) 0,01	1
BIZEM343PCCC	3	(3x) 0,06	1
BIZEM345PAAAAA	5	(5x) 0,01	1

**Olie-fordeler DEV**

Oliefordeler med indstilleligt olie-kammer. Det er muligt at tilpasse mængden af olie til de enkelte smøresteder.

Art.nr.	Udgange	Emb.
CSDEV02	2	1
CSDEV04	4	1
CSDEV05	5	1
CSDEV06	6	1

Oil distributor DEV

Oil distributor with adjustable oilchamber, which makes it possible to adapt the right amount of oil to the lubrication points.

Art.#	Outlets	Quantity
CSDEV02	2	1
CSDEV04	4	1
CSDEV05	5	1
CSDEV06	6	1

**Lynkobling**

Art.nr.	Model	Dia. ø	Gevind	Emb.
CS0402152	Lige	ø4mm	1/8"R	1
CS0402352	90°	ø4mm	1/8"R	1
CS0602158	lige	ø6mm	M10x1,0	1
CS0602162	Lige	ø6mm	1/4"R	1
CS0602166	Lige	ø6mm	M12x1,75	1

Push-in fitting

Art.#	Type	Dia. ø	Thread	Quantity
CS0402152	Straight	ø4mm	1/8" BSP	1
CS0402352	90°	ø4mm	1/8" BSP	1
CS0602158	Straight	ø6mm	M10x1,0	1
CS0602162	Straight	ø6mm	1/4" BSP	1
CS0602166	Straight	ø6mm	M12x1,75	1

**Lynkobling Banjo**

Art.nr.	Model	Dia. ø	Gevind	Emb.
CS0602362	Banjo	ø6mm	1/4"R	1

Push-in fitting Banjo

Art.#	Type	Dia. ø	Thread	Quantity
CS0602362	Banjo	ø6mm	1/4" BSP	1

**Slange nylon**

Art.nr.	Model	Dia. ø	Emb.
PA1104	Natur	ø4,2mm	1
PA1106	Natur	ø6,1mm	1
PA1108	Natur	ø8,1mm	1

Hose nylon

Art.#	Type	Dia. ø	Quantity
PA1104	Nature	ø4,2mm	1
PA1106	Nature	ø6,1mm	1
PA1108	Nature	ø8,1mm	1

**Rørbøjle DIN 72571**

Art.nr.	Dia. ø	Emb.
MFBF401	ø4mm	1
BIB6537	ø6mm	1

Pipe clip DIN 72571

Art.#	Dia. ø	Quantity
MFBF401	ø4mm	1
BIB6537	ø6mm	1



Arbejdsknive
Industriknive
Fritidsknive
Sløjdknive
Universalknive

Work knives
Industrial knives
Outdoor knives
Wood carving knives
Universal knives



Morakniv® Arbejdsknive – Outdoor knife
Morakniv® Work knives – Outdoor knives

138

Morakniv® Fiskeknive – Svampeknive
Morakniv® Fishing knives – Mushroom knives

144

Morakniv® Classic knife – Sløjdknive
Morakniv® Classic knives – Wood carving knives

145

Isolationsknive – Universalknive – Lommeknive – Knæk-af knive – Klinger
Insulation knives – Universal knives – Pocket knives – Snap off knives – Blades

147

Morakniv® Basic 511

Knivblad: Kulstofstål.
Klingelængde: 91mm.
Skæfte: Rød plast.
Inkl. skede.

Art.nr.	Emb.
MO0112147	15 Display
MO0112320	40 Spand

Morakniv® Basic 511

Carbon steel blade.
Blade length: 91mm.
Handle: Red plastic.
Incl. sheath.

Art.#	Quantity
MO0112147	15 Display
MO0112320	40 Bucket

**Morakniv® Basic 546**

Knivblad: Rustfrit stål.
Klingelængde: 91mm.
Skæfte: Blå plast.
Inkl. skede.

Art.nr.	Emb.
MO0112241	15 Display

Morakniv® Basic 546

Stainless steel blade.
Blade length: 91mm.
Handle: Blue plastic.
Incl. sheath.

Art.#	Quantity
MO0112241	15 Display

**Morakniv® Craftline Pro S Allround kniv**

Knivblad: Rustfrit stål.
Klingelængde: 91mm.
Skæfte: Sort og blå gummi.
Inkl. skede.

Art.nr.	Emb.
MO0112242	15 Display

Morakniv® Craftline Pro S All-round knife

Stainless steel blade.
Blade length: 91mm.
Handle: Blue plastic and blue rubber.
Incl. sheath.

Art.#	Quantity
MO0112242	15 Display

**Morakniv® Craftline Pro C Allround kniv**

Knivblad: Kulstofstål.
Klingelængde: 91mm.
Skæfte: Sort og rød gummi.
Inkl. skede.

Art.nr.	Emb.
MO0112243	15 Display

Morakniv® Craftline Pro C All-round knife

Carbon steel blade.
Blade length: 91mm.
Handle: Black and red rubber.
Incl. sheath.

Art.#	Quantity
MO0112243	15 Display

**Morakniv® Craftline Rope**

Knivblad: Rustfrit stål.
Klingelængde: 91mm.
Skæfte: Sort og beige gummi.
Inkl. skede.

Art.nr.	Emb.
MO0112245	15 Display

Morakniv® Craftline Rope

Stainless steel blade.
Blade length: 91mm.
Handle: Black and beige rubber.
Incl. sheath.

Art.#	Quantity
MO0112245	15 Display

**Morakniv® Pro C Safe Arbejdskniv**

Knivblad: Kulstofstål.
Klingelængde: 82mm.
Skæfte: Sort og grøn gummi.
Inkl. skede.

Art.nr.	Emb.
MO0113076	15 Display

Morakniv® Pro C Safe Work knife

Carbon steel blade.
Blade length: 82mm.
Handle: Black and green rubber.
Incl. sheath.

Art.#	Quantity
MO0113076	15 Display



Morakniv® Linoleumskniv 175

Knivblad: Rustfrit stål.
Klingelængde: 63mm.
Skæfte: Træ.

Art.nr. Emb.
MO0113234 10 Æske

Morakniv® Linoleum knife 175

Stainless steel blade.
Blade length: 63mm.
Handle: Wood.

Art.# Quantity
MO0113234 10 Carton


Morakniv® Linoleumskniv 175P

Knivblad: Rustfrit stål.
Klingelængde: 63mm.
Skæfte: Rød plast.

Art.nr. Emb.
MO0113235 10 Æske

Morakniv® Linoleum knife 175P

Stainless steel blade.
Blade length: 63mm.
Handle: Red plastic.

Art.# Quantity
MO0113235 10 Carton


Morakniv® Elektriker kniv

Knivblad: Rustfrit stål.
Klingelængde: 21mm.
Skæfte: Sort gummi.
Inkl. skede.

Art.nr. Emb.
MO0112201 15 Display

Morakniv® Electrician's knife

Stainless steel blade.
Blade length: 21mm.
Handle: Black rubber.
Incl. sheath.

Art.# Quantity
MO0112201 15 Display


Morakniv® Servicekniv

Knivblad: Rustfrit stål.
Klingelængde: 43mm.
Skæfte: Sort gummi.
Inkl. skede.

Art.nr. Emb.
MO0114099 15 Display

Morakniv® Service knife

Stainless steel blade.
Blade length: 43mm.
Handle: Black rubber.
Incl. sheath.

Art.# Quantity
MO0114099 15 Display


Morakniv® Isoleringskniv 7350

Knivblad: Rustfrit stål.
Klingelængde: 350mm.
Skæfte: Rød plast.

Art.nr. Emb.
MO011417230 10 Æske

Morakniv® Insulation knife 7350

Stainless steel blade.
Blade length: 350mm.
Handle: Red plastic.

Art.# Quantity
MO011417230 10 Carton


Morakniv® Isoleringskniv 1442

Knivblad: Kulstofstål.
Klingelængde: 300mm.
Skæfte: Rød plast.

Art.nr. Emb.
MO0111442 10 Æske

Morakniv® Insulation knife 1442

Carbon steel blade.
Blade length: 300mm.
Handle: Red plastic.

Art.# Quantity
MO0111442 10 Carton



Morakniv® Scout 39

Knivblad: Rustfrit stål.
Klingelængde: 86mm.
Skæfte: Olieret birketræ.
Inkl. læderskede.

Art.nr.	Skæfte	Emb.
MO0413973	Rød	6 Æske
MO0413974	Blå	6 Æske
MO0413977	Natur	6 Æske

Morakniv® Scout 39

Stainless steel blade.
Blade length: 86mm.
Handle: Birch wood.
Incl. leather sheath.

Art.#	Handle	Quantity
MO0413973	Red	6 Pinpac
MO0413974	Blue	6 Pinpac
MO0413977	Natural	6 Pinpac

**Morakniv® Scout 39 Safe**

Knivblad: Rustfrit stål.
Klingelængde: 86mm.
Skæfte: Olieret birketræ.
Inkl. læderskede.

Art.nr.	Skæfte	Emb.
MO0413979	Rød	6 Æske
MO0413980	Blå	6 Æske
MO0413983	Natur	6 Æske

Morakniv® Scout 39 Safe

Stainless steel blade.
Blade length: 86mm.
Handle: Birch wood.
Incl. leather sheath.

Art.#	Handle	Quantity
MO0413979	Red	6 Pinpac
MO0413980	Blue	6 Pinpac
MO0413983	Natural	6 Pinpac

**Morakniv® Finn BlackBlade™ – Ash Wood**

Knivblad: Rustfrit stål.
Klingelængde: 87mm.
Skæfte: Asketræ.
Inkl. læderskede.

Art.nr.	Emb.
MO0414083	1 Æske

Morakniv® Finn BlackBlade™ – Ash Wood

Stainless steel blade.
Blade length: 87mm.
Handle: Ash wood.
Incl. leather sheath.

Art.#	Quantity
MO0414083	1 Carton

**Morakniv® Wit BlackBlade™ – Ash Wood**

Knivblad: Rustfrit stål.
Klingelængde: 103mm.
Skæfte: Asketræ.
Inkl. læderskede.

Art.nr.	Emb.
MO0414084	1 Æske

Morakniv® Wit BlackBlade™ – Ash Wood

Stainless steel blade.
Blade length: 103mm.
Handle: Ash wood.
Incl. leather sheath.

Art.#	Quantity
MO0414084	1 Carton

**Morakniv® Lok BlackBlade™ – Ash Wood**

Knivblad: Rustfrit stål.
Klingelængde: 109mm.
Skæfte: Asketræ.
Inkl. læderskede.

Art.nr.	Emb.
MO0414085	1 Æske

Morakniv® Lok BlackBlade™ – Ash Wood

Stainless steel blade.
Blade length: 109mm.
Handle: Ash wood.
Incl. leather sheath.

Art.#	Quantity
MO0414085	1 Carton

**Morakniv® Rombo BlackBlade™ – Ash Wood**

Knivblad: Rustfrit stål.
Klingelængde: 119mm.
Skæfte: Asketræ.
Inkl. læderskede.

Art.nr.	Emb.
MO0414086	1 Æske

Morakniv® Rombo BlackBlade™ – Ash Wood

Stainless steel blade.
Blade length: 119mm.
Handle: Ash wood.
Incl. leather sheath.

Art.#	Quantity
MO0414086	1 Carton



Morakniv® Companion (S)

Knivblad: Rustfrit stål.
Klingelængde: 104mm.
Skæfte: Sort gummi.
Inkl. skede.

Art.nr.	Farve	Emb.
MO0411824	Hi-Vis Orange	15 Display
MO0412141	Sort	15 Display
MO0414073	Brændt Orange	15 Display
MO0111827	Militær Grøn	15 Display
MO0112215	Militær Grøn	5 Pinpac

Morakniv® Companion (S)

Stainless steel blade.
Blade length: 104mm.
Handle: black rubber.
Incl. sheath.

Art.#	Color	Quantity
MO0411824	Hi-Vis Orange	15 Display
MO0412141	Black	15 Display
MO0414073	Burnt Orange	15 Display
MO0111827	Military Green	15 Display
MO0112215	Military Green	5 Pinpac



MO0411824



MO0411827



MO0414073

Morakniv® Companion F Rescue

Knivblad: Rustfrit stål.
Klingelængde: 99mm.
Skæfte: Sort gummi.
Inkl. skede.

Art.nr.	Emb.
MO0111828	15 Display

Morakniv® Companion F Rescue

Stainless steel blade.
Blade length: 99mm.
Handle: black rubber.
Incl. sheath.

Art.#	Quantity
MO0111828	15 Display


Morakniv® HeavyDuty MG (C)

Knivblad: Kulstofstål.
Klingelængde: 104mm.
Skæfte: Sort gummi.
Inkl. skede.

Art.nr.	Emb.
MO0112210	5 Pinpac

Morakniv® HeavyDuty MG (C)

Carbon steel blade.
Blade length: 104mm.
Handle: Black rubber.
Incl. sheath.

Art.#	Quantity
MO0112210	5 Pinpac


Morakniv® Companion Spark Sort

Knivblad: Rustfrit stål.
Klingelængde: 104mm.
Skæfte: Sort gummi.
Inkl. skede.

Art.nr.	Emb.
MO0413567	5 Æske

Morakniv® Companion Spark Black

Stainless steel blade.
Blade length: 104mm.
Handle: Black rubber.
Incl. sheath.

Art.#	Quantity
MO0413567	5 Pinpac


Morakniv® Companion Spark Rød

Knivblad: Rustfrit stål.
Klingelængde: 104mm.
Skæfte: Rød gummi.
Inkl. skede.

Art.nr.	Emb.
MO0413571	5 Æske

Morakniv® Companion Spark Red

Stainless steel blade.
Blade length: 104mm.
Handle: Red rubber.
Incl. sheath.

Art.#	Quantity
MO0413571	5 Pinpac


Morakniv® Companion Spark Gul

Knivblad: Rustfrit stål.
Klingelængde: 104mm.
Skæfte: Gul gummi.
Inkl. skede.

Art.nr.	Emb.
MO0413573	5 Æske

Morakniv® Companion Spark Yellow

Stainless steel blade.
Blade length: 104mm.
Handle: Yellow rubber.
Incl. sheath.

Art.#	Quantity
MO0413573	5 Pinpac



Morakniv® Eldris Sort

Knivblad: Rustfrit stål.
Klingelængde: 59mm.
Skæfte: Sort gummi.
Inkl. skede.

Art.nr. Emb.
MO0412647 5 Æske

Morakniv® Eldris Black

Stainless steel blade.
Blade length: 59mm.
Handle: Black rubber.
Incl. sheath.

Art.# Quantity
MO0412647 5 Pinpac

**Morakniv® Eldris Rød**

Knivblad: Rustfrit stål.
Klingelængde: 59mm.
Skæfte: Rød gummi.
Inkl. skede.

Art.nr. Emb.
MO0412648 5 Æske

Morakniv® Eldris Red

Stainless steel blade.
Blade length: 59mm.
Handle: Red rubber.
Incl. sheath.

Art.# Quantity
MO0412648 5 Pinpac

**Morakniv® Eldris Blå**

Knivblad: Rustfrit stål.
Klingelængde: 59mm.
Skæfte: Blå gummi.
Inkl. skede.

Art.nr. Emb.
MO0412649 5 Æske

Morakniv® Eldris Blue

Stainless steel blade.
Blade length: 59mm.
Handle: Blue rubber.
Incl. sheath.

Art.# Quantity
MO0412649 5 Pinpac

**Morakniv® Eldris Gul**

Knivblad: Rustfrit stål.
Klingelængde: 59mm.
Skæfte: Gul gummi.
Inkl. skede.

Art.nr. Emb.
MO0412650 5 Æske

Morakniv® Eldris Yellow

Stainless steel blade.
Blade length: 59mm.
Handle: Yellow rubber.
Incl. sheath.

Art.# Quantity
MO0412650 5 Pinpac

**Morakniv® Eldris Grøn**

Knivblad: Rustfrit stål.
Klingelængde: 59mm.
Skæfte: Grøn gummi.
Inkl. skede.

Art.nr. Emb.
MO0412651 5 Æske

Morakniv® Eldris Green

Stainless steel blade.
Blade length: 59mm.
Handle: Green rubber.
Incl. sheath.

Art.# Quantity
MO0412651 5 Pinpac

**Morakniv® Eldris Brændt Orange**

Knivblad: Rustfrit stål.
Klingelængde: 59mm.
Skæfte: Orange gummi.
Inkl. skede.

Art.nr. Emb.
MO0413501 5 Æske

Morakniv® Eldris Burnt Orange

Stainless steel blade.
Blade length: 59mm.
Handle: Orange rubber.
Incl. sheath.

Art.# Quantity
MO0413501 5 Pinpac

**Morakniv® Bæltestrop
til Eldris, Garberg og Kansbol knive**

Materiale: Læder/polymer.
Bemærk! Bæltestroppen medfølger i Multi-Mount
versioner af Garberg samt alle versioner af Kansbol.

Art.nr. Emb.
MO0413273 10 Æske

**Morakniv® Belt loop
for Eldris, Garberg and Kansbol knives**

Material: Leather/polymer.
Note! This belt loop is included in Multi-Mount
versions of Garberg and all versions of Kansbol.

Art.# Quantity
MO0413273 10 Carton

**Morakniv® Tændstål**

Gnister ved 3000°C – virker i regn og sne.
Op til 7000 gnister.

Art.nr. Emb.
MO0411859 5 Pinpac

Morakniv® Firestarter

Sparks at 3000°C – works in rain and
snow. Up to 7000 strikes.

Art.# Quantity
MO0411859 5 Pinpac



Morakniv® Outdoor 2000

Knivblad: Rustfrit stål.
Klingelængde: 109mm.
Skæfte: Grøn gummi.
Inkl. skede.

Art.nr. Emb.
MO0410629 15 Display

Morakniv® Outdoor 2000

Stainless steel blade.
Blade length: 109mm.
Handle: Green rubber.
Incl. sheath.

Art.# Quantity
MO0410629 15 Display

**Morakniv® Bushcraft Forest**

Knivblad: Rustfrit stål.
Klingelængde: 109mm.
Skæfte: Grøn gummi.
Inkl. skede.

Art.nr. Emb.
MO0412356 5 Pinpac

Morakniv® Bushcraft Forest

Stainless steel blade.
Blade length: 109mm.
Handle: Green rubber.
Incl. sheath.

Art.# Quantity
MO0412356 5 Pinpac

**Morakniv® Bushcraft Survival Black**

Knivblad: Sort-coated kulstofstål.
Klingelængde: 109mm.
Skæfte: Sort gummi.
Inkl. skede.

Art.nr. Emb.
MO0111742 5 Pinpac

Morakniv® Bushcraft Survival Black

Black-coated carbon steel blade.
Blade length: 109mm.
Handle: Black rubber.
Incl. sheath.

Art.# Quantity
MO0111742 5 Pinpac

**Morakniv® Bushcraft Black Blade**

Knivblad: Kulstofstål.
Klingelængde: 109mm.
Skæfte: Sort gummi.
Inkl. skede.

Art.nr. Emb.
MO0410791 5 Pinpac

Morakniv® Bushcraft Black Blade

Carbon steel blade.
Blade length: 109mm.
Handle: Black rubber.
Incl. sheath.

Art.# Quantity
MO0410791 5 Pinpac

**Morakniv® Kansbol (S) Grøn**

Knivblad: Rustfrit stål.
Klingelængde: 109mm.
Skæfte: Grøn gummi.

Art.nr. Inkl. Emb.
MO0412645 Multi-Mount 5 Æske
MO0412634 Polyamid skede 5 Æske

Morakniv® Kansbol (S) Green

Stainless steel blade.
Blade length: 109mm.
Handle: Green rubber.

Art.# Inkl. Quantity
MO0412645 Multi-Mount 5 Pinpac
MO0412634 Polymer sheath 5 Pinpac

**Morakniv® Kansbol (S) Brændt Orange**

Knivblad: Rustfrit stål.
Klingelængde: 109mm.
Skæfte: Orange gummi.

Art.nr. Inkl. Emb.
MO0413507 Multi-Mount 5 Æske
MO0413506 Polyamid skede 5 Æske

Morakniv® Kansbol (S) Burnt Orange

Stainless steel blade.
Blade length: 109mm.
Handle: Orange rubber.

Art.# Inkl. Quantity
MO0413507 Multi-Mount 5 Pinpac
MO0413506 Polymer sheath 5 Pinpac

**Morakniv® Garberg (S) Sort**

Knivblad: Rustfrit stål.
Klingelængde: 109mm.
Skæfte: Sort gummi.

Art.nr. Inkl. Emb.
MO0412642 Multi-Mount 5 Æske
MO0412635 Læderskede 5 Æske

Morakniv® Garberg (S) Black

Stainless steel blade.
Blade length: 109mm.
Handle: Black rubber.

Art.# Inkl. Quantity
MO0412642 Multi-Mount 5 Pinpac
MO0412635 Leather sheath 5 Pinpac

**Morakniv® Garberg (C) Sort**

Knivblad: Kulstofstål.
Klingelængde: 109mm.
Skæfte: Sort gummi.

Art.nr. Inkl. Emb.
MO0413147 Multi-Mount 5 Æske
MO0413100 Læderskede 5 Æske

Morakniv® Garberg (C) Black

Carbon steel blade.
Blade length: 109mm.
Handle: Black rubber.

Art.# Inkl. Quantity
MO0413147 Multi-Mount 5 Pinpac
MO0413100 Leather sheath 5 Pinpac



Morakniv® Flydende savtakket kniv

Knivblad: Rustfrit stål, afrundet spids.
Klingelængde: 96mm.
Skæfte: Kork.
Inkl. skede.

Art.nr. Emb.
MO0113131 15 Display

Morakniv® Floating serrated knife

Stainless steel blade, rounded tip.
Blade length: 96mm.
Handle: Cork.
Incl. sheath.

Art.# Quantity
MO0113131 15 Display

**Morakniv® Fishing Comfort Scaler 098**

Knivblad: Rustfrit stål.
Klingelængde: 98mm.
Skæfte: Sort gummi.
Inkl. skede.

Art.nr. Emb.
MO0412208 5 Pinpac

Morakniv® Fishing Comfort Scaler 098

Stainless steel blade.
Blade length: 98mm.
Handle: Black rubber.
Incl. sheath.

Art.# Quantity
MO0412208 5 Pinpac

**Morakniv® Fishing Comfort Fillet 155**

Knivblad: Rustfrit stål.
Klingelængde: 155mm.
Skæfte: Sort gummi.
Inkl. skede.

Art.nr. Emb.
MO0413869 5 Pinpac

Morakniv® Fishing Comfort Fillet 155

Stainless steel blade.
Blade length: 155mm.
Handle: Black rubber.
Incl. sheath.

Art.# Quantity
MO0413869 5 Pinpac

**Morakniv® Svampe kniv Karl-Johan**

Knivblad: Rustfrit stål.
Klingelængde: 62mm.
Skæfte: Plast.

Art.nr.	Type	Emb.
MO0410906	Sort	5 Pinpac
MO0412206	Rød	5 Pinpac

Morakniv® Mushroom knife Karl-Johan

Stainless steel blade.
Blade length: 62mm.
Handle: Plastic.

Art.#	Type	Quantity
MO0410906	Black	5 Pinpac
MO0412206	Red	5 Pinpac

**Morakniv® Outdoor camping økse**

Øksehoved: Borstål.
Skæfte: Grøn plast.
Totallængde: 335mm.

Art.nr. Emb.
MO0411991 5 Pinpac

Morakniv® Outdoor camping axe

Boron steel head.
Handle: Green plastic.
Length: 335mm.

Art.# Quantity
MO0411991 5 Pinpac

**Morakniv® Outdoor camping økse**

Øksehoved: Borstål.
Skæfte: Orange plast.
Totallængde: 335mm.

Art.nr. Emb.
MO0412058 5 Pinpac

Morakniv® Outdoor camping axe

Boron steel head.
Handle: Orange plastic.
Length: 335mm.

Art.# Quantity
MO0412058 5 Pinpac



Morakniv® Classic Nr 1/0

Knivblad: Kulstofstål.
Klingelængde: 77mm.
Skæfte: Træ.
Inkl. skede.

Art.nr. Emb.
MO0413603 5 Æske

Morakniv® Classic No 1/0

Carbon steel blade.
Blade length: 77mm.
Handle: Wood.
Incl. sheath.

Art.# Quantity
MO0413603 5 Pinpac

**Morakniv® Classic Nr 2**

Knivblad: Kulstofstål.
Klingelængde: 105mm.
Skæfte: Træ.
Inkl. skede.

Art.nr. Emb.
MO0413604 5 Æske

Morakniv® Classic No 2

Carbon steel blade.
Blade length: 105mm.
Handle: Wood.
Incl. sheath.

Art.# Quantity
MO0413604 5 Pinpac

**Morakniv® Classic Nr 3**

Knivblad: Kulstofstål.
Klingelængde: 135mm.
Skæfte: Træ.
Inkl. skede.

Art.nr. Emb.
MO0413605 5 Æske

Morakniv® Classic No 3

Carbon steel blade.
Blade length: 135mm.
Handle: Wood.
Incl. sheath.

Art.# Quantity
MO0413605 5 Pinpac

**Morakniv® Classic Nr 2F**

Knivblad: Kulstofstål.
Klingelængde: 105mm.
Skæfte: Træ.
Inkl. skede.

Art.nr. Emb.
MO0413606 5 Æske

Morakniv® Classic No 2F

Carbon steel blade.
Blade length: 105mm.
Handle: Wood.
Incl. sheath.

Art.# Quantity
MO0413606 5 Pinpac

**Morakniv® Woodsplitter**

Knivblad: Rustfrit stål.
Skæfte: Træ.

Art.nr.	Farve	Klinge	Emb.
MO0413968	Classic, Rød	115 mm	5 Æske
MO0413967	Natur	114 mm	12 Æske

Morakniv® Woodsplitter

Stainless steel blade.
Handle: Wood.

Art.#	Color	Blade	Quantity
MO0413968	Classic, Red	115 mm	5 Pinpac
MO0413967	Natural	114 mm	12 Pinpac

**Morakniv® Sløjdkniv 120**

Knivblad: Lamineret Kulstofstål.
Klingelængde: 60mm.
Skæfte: Træ.
Inkl. skede.

Art.nr. Emb.
MO041061600 10 Æske

Morakniv® Woodcarving 120

Laminated Carbon steel blade.
Blade length: 60mm.
Handle: Wood.
Incl. sheath.

Art.# Quantity
MO041061600 10 Carton

**Morakniv® Sløjdkniv 105**

Knivblad: Lamineret Kulstofstål.
Klingelængde: 79mm.
Skæfte: Træ.

Art.nr. Emb.
MO041061650 10 Æske

Morakniv® Woodcarving 105

Laminated Carbon steel blade.
Blade length: 79mm.
Handle: Wood.

Art.# Quantity
MO041061650 10 Carton

**Morakniv® Sløjdkniv 106**

Knivblad: Lamineret Kulstofstål.
Klingelængde: 82mm.
Skæfte: Træ.
Inkl. skede.

Art.nr. Emb.
MO041061630 10 Æske

Morakniv® Woodcarving 106

Laminated Carbon steel blade.
Blade length: 82mm.
Handle: Wood.
Incl. sheath.

Art.# Quantity
MO041061630 10 Carton



Morakniv® Træskære sæt

Sæt bestående af sløjdkniv 120 (C) og en groft tilskåret hest af træ. Leveret i en flot æske.

Knivblad: Kulstofstål.
Klingelængde: 60mm.
Skæfte: Træ.
Inkl. skede.

<i>Art.nr.</i>	<i>Emb.</i>
MO0414041	5 Æske

Morakniv® Woodcarving kit

Kit with a woodcarving 120 knife (C) and a roughly cut wooden horse. Comes in a nice carton box.

Carbon steel blade.
Blade length: 60mm.
Handle: Wood.
Incl. sheath.

<i>Art.#</i>	<i>Quantity</i>
MO0414041	5 Carton

**Morakniv® Skekniv 162 - Dobbeltægget**

Knivblad: Rustfrit stål.
Klingelængde: 55mm.
Skæfte: Træ.

<i>Art.nr.</i>	<i>Skede</i>	<i>Emb.</i>
MO0413388	Inkl. Læderskede	5 Æske
MO0413446	Uden skede	5 Æske

Morakniv® Hook knife 162 - Double edge

Stainless steel blade.
Blade length: 55mm.
Handle: Wood.

<i>Art.#</i>	<i>Sheath</i>	<i>Quantity</i>
MO0413388	Incl. Leather Sheath	5 Pinpac
MO0413446	Without sheath	5 Pinpac



MO0413388



MO0413446

Morakniv® Skekniv 163 - Dobbeltægget

Knivblad: Rustfrit stål.
Klingelængde: 74mm.
Skæfte: Træ.

<i>Art.nr.</i>	<i>Skede</i>	<i>Emb.</i>
MO0413387	Inkl. Læderskede	5 Æske
MO0413445	Uden skede	5 Æske

Morakniv® Hook knife 163 - Double edge

Stainless steel blade.
Blade length: 74mm.
Handle: Wood.

<i>Art.#</i>	<i>Sheath</i>	<i>Quantity</i>
MO0413387	Incl. Leather Sheath	5 Pinpac
MO0413445	Without sheath	5 Pinpac



MO0413387



MO0413445

Morakniv® Skekniv 164 - Højrehåndet

Knivblad: Rustfrit stål.
Klingelængde: 55mm.
Skæfte: Træ.

<i>Art.nr.</i>	<i>Skede</i>	<i>Emb.</i>
MO0413385	Inkl. Læderskede	5 Æske
MO0413443	Uden skede	10 Æske

Morakniv® Hook knife 164 - Right handed

Stainless steel blade.
Blade length: 55mm.
Handle: Wood.

<i>Art.#</i>	<i>Sheath</i>	<i>Quantity</i>
MO0413385	Incl. Leather Sheath	5 Pinpac
MO0413443	Without sheath	10 Carton



MO0413385



MO0413443

Morakniv® Skekniv 164 - Venstrehåndet

Knivblad: Rustfrit stål.
Klingelængde: 55mm.
Skæfte: Træ.

<i>Art.nr.</i>	<i>Skede</i>	<i>Emb.</i>
MO0413386	Inkl. Læderskede	5 Æske
MO0413444	Uden skede	10 Æske

Morakniv® Hook knife 164 - Left handed

Stainless steel blade.
Blade length: 55mm.
Handle: Wood.

<i>Art.#</i>	<i>Sheath</i>	<i>Quantity</i>
MO0413386	Incl. Leather Sheath	5 Pinpac
MO0413444	Without sheath	10 Carton



MO0413386



MO0413444

Isoleringskniv med dobbelt skær

Klinge i rustfrit stål.
Skæfte i plast med soft greb.
280mm klinge / total 415mm.

Art.nr. Emb.
KX400310 1/100

Insulation knife with double blade

Stainless steel blade.
Plastic handle with soft grip.
280mm blade / total 415mm.

Art.# Quantity
KX400310 1/100


Isoleringskniv med dobbelt skær

Klinge i rustfrit stål.
Skæfte i plast med soft greb.
200mm klinge / total 335mm.

Art.nr. Emb.
KX400320 1/100

Insulation knife with double blade

Stainless steel blade.
Plastic handle with soft grip.
200mm blade / total 335mm.

Art.# Quantity
KX400320 1/100


Universal kniv

Klinge i rustfrit stål.
Skæfte i plast.
280mm klinge / total 400mm.

Art.nr. Emb.
KX400240B 1/50

Universal knife

Stainless steel blade.
Plastic handle.
280mm blade / total 400mm.

Art.# Quantity
KX400240B 1/50


Universal kniv

Klinge i rustfrit stål.
Skæfte i plast.
155mm klinge / total 280mm.

Art.nr. Emb.
KX400250B 1/50

Universal knife

Stainless steel blade.
Plastic handle.
155mm blade / total 280mm.

Art.# Quantity
KX400250B 1/50


Universal kniv

Klinge i rustfrit stål.
Skæfte i plast.
80mm klinge / total 185mm.

Art.nr. Emb.
KX400270B 1/100

Universal knife

Stainless steel blade.
Plastic handle.
80mm blade / total 185mm.

Art.# Quantity
KX400270B 1/100


KABI Keramisk Kniv 4"

Keramisk klinge.
Skæfte i Plast (Non-Slip).
Klingebeskyttelse i PP.
100mm klinge / Total 210mm.
Leveres i sort æske.

Art.nr. Emb.
KX400330 50

KABI Ceramic Knife 4"

Ceramic blade.
Handle of Non-Slip material.
Protection cover for blade in PP.
Blade length 100mm / Total 210mm.
Delivered in a black box with EVA inner.

Art.# Quantity
KX400330 50


KABI Keramisk Kniv 5"

Keramisk klinge.
Skæfte i Plast (Non-Slip).
Klingebeskyttelse i PP.
125mm klinge / Total 250mm.
Leveres i sort æske.

Art.nr. Emb.
KX400340 50

KABI Ceramic Knife 5"

Ceramic blade.
Handle of Non-Slip material.
Protection cover for blade in PP.
Blade length 125mm / Total 250mm.
Delivered in a black box with EVA inner.

Art.# Quantity
KX400340 50



Slibesten

Grid 180.

<i>Art.nr.</i>	<i>Emb.</i>
KX400440	1/100

Whetstone

Grit 180.

<i>Art.#</i>	<i>Quantity</i>
KX400440	1/100

**Slibesten**

Grid 240 (grøn) / 120 (sort).

<i>Art.nr.</i>	<i>Emb.</i>
KX400450	1/100

Whetstone

Grit 240 (green) / 120 (black).

<i>Art.#</i>	<i>Quantity</i>
KX400450	1/100

**KABI Kniv Sæt Basic – 1**KX400240, KX400250, KX400270,
KX400440 & Twist pack.

<i>Art.nr.</i>	<i>Emb.</i>
KXBASIC1	1/50

KABI Knife Set Basic – 1Contains 1.pcs.
KX400240, KX400250, KX400270,
KX400440 & Twist pack.

<i>Art.#</i>	<i>Quantity</i>
KXBASIC1	1/50

**Richartz lommekniv med gummigreb og lås**

Model Outdoor (sort).

<i>Art.nr.</i>	<i>Emb.</i>
RI5931210232	12

Richartz folding knife with rubber grip and lock

<i>Art.#</i>	<i>Quantity</i>
RI5931210232	12

**Læderskede for Richartz knive**

<i>Art.nr.</i>	<i>Emb.</i>
RI21086	1

Leather sheath for Richartz knives

<i>Art.#</i>	<i>Quantity</i>
RI21086	1



NT Cutter er et Japansk høj kvalitets produkt. Fælles for de fleste NT knive kan bl.a. nævnes at de er med aluminiumsgreb, rustfri føringsskinne, patenteret automatisk låsesystem og særdeles skarpe "knæk af" klinger.

NT Cutter is a high quality Japanese product, featuring aluminium grips, stainless steel guide rails, patented automatic locking system and extremely sharp 'snap off' blades.

Støbt aluminiumsgreb og autolåsning

Leveres med 1 stk. 9mm klinge.

Art.nr.	Emb.
NTA300GRP	20

Moulded aluminium grip and automatic lock

With 1 x 9mm blade.

Art.#	Quantity
NTA300GRP	20



Støbt aluminiumsgreb med skruelås

Støbt klingeholder af aluminium.
Leveres med 1 stk. 18mm klinge.

Art.nr.	Emb.
NTL500GP	10

Moulded aluminium grip with screw lock

Moulded aluminium blade holder.
With 1 x 18mm blade.

Art.#	Quantity
NTL500GP	10



Støbt aluminiumsgreb og autolåsning

Leveres med 1 stk. 18mm klinge.

Art.nr.	Emb.
NTL500GRP	10

Moulded aluminium grip and automatic lock

With 1 x 18mm blade.

Art.#	Quantity
NTL500GRP	10



Støbt aluminiumsgreb, autolåsning

Klingelås og magasin for max. 6 klinger.
Leveres med 2 stk. 18mm klinger.

Art.nr.	Emb.
NTL2000RP	10

Moulded aluminium grip, automatic lock

Blade lock and Magazine for max. 6 blades.
With 2 x 18mm blades.

Art.#	Quantity
NTL2000RP	10



Plastgreb og autolåsning

Leveres med 1 stk. 18mm klinge.

Art.nr.	Emb.
NTL300RP	20

Plastic grip and automatic lock

With 1 x 18mm blade.

Art.#	Quantity
NTL300RP	20



Karton åbner

Art.nr.	Emb.
NTR1200P	10

Carton opener

Art.#	Quantity
NTR1200P	10



Originale NT CUTTER klinger

Dobbelt slebne – særdeles skarpe.

Art.nr.	Indhold	Emb.
NTBL10P	10 klinger 18mm	10
NTBL50P	50 klinger 18mm	50
NTBR400P	10 klinger f/ NTR1200P	10

Original NT CUTTER blades

Double bevel – extremely sharp.

Art.#	Contents	Quantity
NTBL10P	10 blades 18mm	10
NTBL50P	50 blades 18mm	50
NTBR400P	10 blades f/ NTR1200P	10



NTBL10P



NTBL50P

KABI Universalklinger er produceret efter vore foreskrifter på førende specialfabrik i Europa. Producenten er hovedleverandør til knivproducenter World-wide, og er endvidere godkendt i.h.t ISO9002 og EN29002.

NB: Alle KABI Universalklinger er særdeles skarpe, og bør behandles med forsigtighed.

KABI universal blades are produced to our specifications by a leading European specialist. The manufacturer is the prime supplier of knife companies all over the world, and is certified according to ISO9002 and EN29002.

NB: All KABI universal blades are extremely sharp, and should be handled with caution.

9mm knæk-af klinger

0,40mm.

Art.nr.	Emb.
KU809040D	10x10 dispenser

9mm snap off blades

0,40mm.

Art.#	Quantity
KU809040D	10x10 dispenser



18mm knæk-af klinger

0,43mm.

Art.nr.	Emb.
KU118043D	10x10 dispenser

18mm snap off blades

0,43mm.

Art.#	Quantity
KU118043D	10x10 dispenser



Fast klinge

18mm - 0,43mm.

9mm - 0,40mm.

Art.nr.	Emb.
KU118	10x10 box
KU809	10x10 box

Fixed blade

18mm - 0,43mm.

9mm - 0,40mm.

Art.#	Quantity
KU118	10x10 box
KU809	10x10 box



Tankbåndmål
Boltsakse
Kabelsakse
Wiresakse
Sakse

Dipping tapes
Bolt cutters
Cable cutters
Wire rope cutters
Scissors



Tankbåndmål – Rammebåndmål
Tank dipping tapes – Open frame measuring tapes

152

HIT Boltsakse – Wiresakse – Gevindstangsklipper – Trådnet klipper
HIT Bolt cutter – Wire cutters – Threaded rod cutter – Wire mesh cutter

154

Sakse og tænger
Shears and pliers

157

Richter kulstofstål bånd inkl. lod

Graveret markering på mørkættet baggrund, med karabinhage, MM/INCH-Deling. KULSTOFSTÅL bånd 415ES på SR-ramme.

Art.nr.	Længde	Emb.
RC415ES015G	15 M	1
RC415ES020G	20 M	1
RC415ES025G	25 M	1
RC415ES030G	30 M	1
RC415ES050G	50 M	1

Løse bånd for 415ES

Art.nr.	Længde	Emb.
RC415ESA015	15 M	1
RC415ESA020	20 M	1
RC415ESA025	25 M	1
RC415ESA030	30 M	1
RC415ESA050	50 M	1

Richter carbon steel tape incl. weight

Raised markings and figures on a dark etched background, with swivel hook, MM/INCH-Scale. CARBON STEEL tape 415ES on SR frame.

Art.#	Length	Quantity
RC415ES015G	15 M	1
RC415ES020G	20 M	1
RC415ES025G	25 M	1
RC415ES030G	30 M	1
RC415ES050G	50 M	1

Refill tape for 415ES

Art.#	Length	Quantity
RC415ESA015	15 M	1
RC415ESA020	20 M	1
RC415ESA025	25 M	1
RC415ESA030	30 M	1
RC415ESA050	50 M	1

**Richter hvidlakeret stålband inkl. lod**

Sort/rød markering på hvid baggrund, med karabinhage, MM/INCH-Deling. HVIDLAKERET stålband 415WES på SR-ramme.

Art.nr.	Længde	Emb.
RC415WES010G	10 M	1
RC415WES015G	15 M	1
RC415WES020G	20 M	1
RC415WES025G	25 M	1
RC415WES030G	30 M	1

Løse bånd for 415WES

Art.nr.	Længde	Emb.
RC415WESA010	10 M	1
RC415WESA015	15 M	1
RC415WESA020	20 M	1
RC415WESA025	25 M	1
RC415WESA030	30 M	1
RC415WESA050	50 M	1

Richter white painted steel tape incl. weight

Black/red markings on a white background, with swivel hook, MM/INCH-Scale. WHITE PAINTED steel tape 415WES on SR frame.

Art.#	Length	Quantity
RC415WES010G	10 M	1
RC415WES015G	15 M	1
RC415WES020G	20 M	1
RC415WES025G	25 M	1
RC415WES030G	30 M	1

Refill tape for 415WES

Art.#	Length	Quantity
RC415WESA010	10 M	1
RC415WESA015	15 M	1
RC415WESA020	20 M	1
RC415WESA025	25 M	1
RC415WESA030	30 M	1
RC415WESA050	50 M	1

**Richter rustfrit stålband inkl. lod**

Graveret markering på mørkættet baggrund, med karabinhage, MM/INCH-deling. RUSTFRIT stålband 465ES på SR-ramme.

Art.nr.	Længde	Emb.
RC465ES010G	10 M	1
RC465ES015G	15 M	1
RC465ES020G	20 M	1
RC465ES025G	25 M	1
RC465ES030G	30 M	1
RC465ES050G	50 M	1

Løse bånd for 465ES

Art.nr.	Længde	Emb.
RC465ESA010	10 M	1
RC465ESA015	15 M	1
RC465ESA025	25 M	1
RC465ESA030	30 M	1

Richter stainless steel tape incl. weight

Raised markings in bright natural colour on a dark etched background, with swivel hook, MM/INCH-scale. STAINLESS STEEL tape 465ES on SR frame.

Art.#	Length	Quantity
RC465ES010G	10 M	1
RC465ES015G	15 M	1
RC465ES020G	20 M	1
RC465ES025G	25 M	1
RC465ES030G	30 M	1
RC465ES050G	50 M	1

Refill tape for 465ES

Art.#	Length	Quantity
RC465ESA010	10 M	1
RC465ESA015	15 M	1
RC465ESA025	25 M	1
RC465ESA030	30 M	1

**KABI Messinglod nr.15**

Lod uden deling for tankbåndmål.

Art.nr.	Emb.
RC15	1

KABI brass weight nr.15

Dip weight without scale.

Art.#	Quantity
RC15	1



N.B. Tankbåndmål med andre lodtyper i messing eller rustfrit stål leveres på anfordring. /
N.B. Tank dipping tapes with other type of weight in brass or stainless steel available on request.

Richter rustfrit stålband inkl. lod

Graveret markering på mørkættet baggrund, med karabinhage, MM / INCH-delning.

RUSTFRIT stålband 465 på SR-ramme. Rustfrit lod med MM / INCH 1/16 deling, 300g.

Art.nr.	Længde	Emb.
RC465ES10S059R2	10 M	1
RC465ES20S059R2	20 M	1
RC465ES30S059R2	30 M	1

Richter stainless steel tape incl. weight

Raised markings in bright colour on a dark etched background, with swivel hook, MM / INCH-scale.

STAINLESS STEEL steel tape 465 on SR frame. Stainless steel weight with MM / INCH 1/16 scale, 300g.

Art.#	Length	Quantity
RC465ES10S059R2	10 M	1
RC465ES20S059R2	20 M	1
RC465ES30S059R2	30 M	1

**Richter stålband**

Lakeret, Sort/ Rød markering på grå baggrund – mål i ring, MM-Deling. Klasse II.

RUSTFRIT stålband 474 på SR-ramme.

Art.nr.	Længde	Emb.
RC474SR030	30 M	1
RC474SR050	50 M	1

Richter steel tape

Painted. Black/red markings on grey background – measurement in ring, MM-Scale. Class II. Ring included in measurement.

STAINLESS STEEL steel tape 474 on SR frame.

Art.#	Length	Quantity
RC474SR030	30 M	1
RC474SR050	50 M	1

**Richter polyamid belagt stålband**

Sort/rød markering på gul baggrund – mål i ring, MM-Deling. Klasse II.

POLYAMID belagt stålband 404 på V-ramme.

Art.nr.	Længde	Emb.
RC404V030	30 M	1
RC404V050	50 M	1

Richter polyamide-coated steel tape

Black/red markings on yellow background – measurement in MM-scale. Class II. Ring included in measurement.

POLYAMIDE-coated steel tape 404 on V frame.

Art.#	Length	Quantity
RC404V030	30 M	1
RC404V050	50 M	1

**Richter glasfiber bånd**

Sort/rød markering på gul baggrund, – mål i ring, MM-Deling. Klasse II.

GLASFIBER bånd 218 på R-ramme.

Art.nr.	Længde	Emb.
RC218R050	50 M	1
RC218R100	100 M	1

Richter glass fibre tape

Black/red markings on yellow background, – measurement in MM-scale. Class II. Ring included in measurement.

GLASS FIBRE tape 218 on R frame.

Art.#	Length	Quantity
RC218R050	50 M	1
RC218R100	100 M	1

**Richter vandstandspejle bånd**

Med lyd og lys indikation, fra 20 til 500 M.

GLASFIBER bånd med 2 stålwire, sort/rød markering, – MM-delning.

Art.nr.	Længde	Emb.
RC26020	20 M	1
RC26030	30 M	1
RC26050	50 M	1

KONTAKT OS FOR TILBUD.

Richter water depth tape

With light and buzzer indicator, from 20 to 500 M.

GLASS FIBRE tape with 2 steel wires, black/red markings, – MM-scale.

Art.#	Length	Quantity
RC26020	20 M	1
RC26030	30 M	1
RC26050	50 M	1

CONTACT US FOR A QUOTE.



Boltesaks C. 48


Letvægts model med RØDE SUPER KÆBER.

Til klipning af materiale indtil Rockwell HRC 48, Brinell 450, 162 kg/mm, bl.a. Piano tråd.


Art.nr. / Art.#	Størrelse / Size	Klip / Cut	Bygn. stål / Steel	Hærdet / Tempered HRC 48	Emb. / Quantity
HIC4812	12" – 300mm	Side / Clipper	5mm	4mm	12
HIC4814	14" – 350mm	Side / Clipper	7mm	5mm	12
HIC4818	18" – 450mm	Side / Clipper	8mm	5,5mm	6
HIC4824	24" – 600mm	Center	10mm	7mm	6
HIC4830	30" – 750mm	Center	13mm	8mm	2
HIC4836	36" – 900mm	Center	16mm	9mm	2
HIC4842	42" – 1050mm	Center	19mm	10mm	1

Løse kæber / Spare jaws, type CC. 48

Art.nr. / Art.#	Størrelse / Size	Klip / Cut	Emb. / Quantity
HICC4812	12" – 300mm	Side / Clipper	1
HICC4814	14" – 350mm	Side / Clipper	1
HICC4818	18" – 450mm	Side / Clipper	1
HICC4824	24" – 600mm	Center	1
HICC4830	30" – 750mm	Center	1
HICC4836	36" – 900mm	Center	1
HICC4842	42" – 1050mm	Center	1




Side klip / Clipper cut



Center klip / Center cut

Bolt cutter C. 48

Lightweight model with RED SUPER JAWS. For cutting materials up to Rockwell HRC 48, Brinell 450, 162 kg/mm, including piano wire.



Justerings Bolt
(ekscenterbolt)
for justering af
kæber.


This is the
adjusting bolt
(eccentric bolt)
for adjusting the
cutting edge.



Løsn møtrikker ca. en omgang (360°).
Loosen nuts on cam bolts about one turn (360°).



Justér kæben ved ekscenterbolte til de er lukket.
Align cutter jaws by rotating the cam bolts; move arrows on cam bolt inward to close jaw.



Stram møtrikker. Boltesaksen er nu justeret.
Tighten nuts. Cutter is now fully adjusted.


Boltesaks type C. 48 SILVER

Med kraftige SILVER KÆBER. Beregnet for brugere der klipper kontinuerligt bl.a. betonjernfabrikker.

Art.nr. / Art.#	Størrelse / Size	Bygn. stål / Steel	Hærdet / Tempered HRC 48	Emb. / Quantity
HIC48S18	18" – 450mm			
HIC48S24	24" – 600mm	10mm	7mm	6
HIC48S30	30" – 750mm	13mm	8mm	2
HIC48S36	36" – 900mm	16mm	9mm	2
HIC48S42	42" – 1050mm	19mm	10mm	1

Løse kæber / Spare jaws, type CC. 48-SILVER

Art.nr. / Art.#	Størrelse / Size	Emb. / Quantity
HICC48S18	18" – 450mm	1
HICC48S24	24" – 600mm	1
HICC48S30	30" – 750mm	1
HICC48S36	36" – 900mm	1
HICC48S42	42" – 1050mm	1



Center klip / Center cut


Bolt cutter type C. 48 SILVER

With powerful SILVER JAWS. For continuous cutting, for concrete reinforcement fabrication.


**Vinkel Klipper 45°**

Kan klippe materiale op til HRC 42, 133 kg/mm².

Art.nr. / Art.#	Størrelse / Size	Emb. / Quantity
HIAC600	24" – 600mm	6
HIACC600	Kæbesæt / Spare jaw, for HIAC600	1



Center klip / Center cut



Vinklede kæber / Angular jaws

Angle cutter 45°

Can cut materials up to HRC 42, 133 kg/mm².



Kabelsakse

For kobber- og kommunikationskabler.

Cable cutter

For cutting copper and communication cables.

Art.nr. / Art.#	Længde / Length	Kapacitet (IV kabel) / Capacity (IV cable)	Emb. / Quantity
HISC10	160mm	IV 22mm ² ø9,2mm	Hand type 1
HISC20	210mm	IV 38mm ² ø12mm	Hand type 1
HISC30	240mm	IV 60mm ² ø14mm	Hand type 1



HISC10



HISC20



HISC30

Wiresakse

(også for bløde & hårde stålkabler).

Wire rope cutters

(including soft and hard steel cables).

Art.nr. / Art.#	Størrelse / Size	Emb. / Quantity
HIHWC6	190mm Enhåndssaks / Handy type	6
HIHWC9	335mm Støbt aluminiums greb / Forged aluminium handles	1
HIHWC16	650mm Støbt aluminiums greb / Forged aluminium handles	1
HIW16	710mm Rør greb / Tubular handles	1



HIHWC6



HIHWC9



HIHWC16



HIW16

Kæbesæt for wiresakse / Spare jaw for wirecutters

Art.nr. / Art.#	For	Emb. / Quantity
HIHWCC9	ø6mm HIHWC9	1
HIHWCC16	ø9mm HIHWC16	1

Kapacitet Capacity	L (mm)	Stål wire Wire rope	Piano tråd Piano wire	Stålstang Steel rod	Kobber/aluminium Copper/aluminium
HIHWC6	190	ø6mm	ø2,5mm	ø4mm	
HIHWC9	335	ø9mm	ø4,0mm	ø6mm	
HIHWC16	650	ø16mm	ø5,0mm	ø9mm	
HIW16	710	ø16mm	-	-	26mm

Stålbåndsakse med udveksling

Klipper stålbånd, båndjern m.m.

Steel band shears with gear

For steel tape, iron band etc.

Art.nr. / Art.#	Størrelse / Size	Kapacitet / Capacity	Emb. / Quantity
HISS200	240mm		1
HISS450	460mm	51x1,2mm	1
HISS600	600mm	51x1,3mm eller / or 32x1,2 x dobbelt / double	1



HISS200



HISS450



HISS600

Gevindstangsklipper med plads til 2 kæbesæt

HIT's nyudviklede gevindstangsklipper med udskiftelige gevindbakker, klipper hurtigt og rent gevindstænger, der efter klipning ikke skal efterbehandles (møtrik kan direkte påskrues).
Gevindstangsklipperen leveres uden gevindbakke (tilkøbes).

Threaded rod cutter with room for 2 jaw sets

With interchangeable threaded jaws. Cuts quickly and cleanly the threaded rod. After cutting, the nut can be screwed directly on the rod.
Threaded rod cutter is without jaws as standard.

Body uden kæber / Body without jaws

Art.nr. / Art.#	Størrelse / Size	Stigning / Incline	Emb. / Quantity
HITRCW6-10	750mm	1,25	1

Gevindbakker / Jaws

Art.nr. / Art.#	Størrelse / Size	Emb. / Quantity
HITRCC6	6mm	1
HITRCC8	8mm	1
HITRCC10	10mm	1

**Klippe- og klemmetænger**

For ovale kobber og aluminium klemmer.

Cutting and clamping cutter

For oval copper and aluminium clamps.

Art.nr. / Art.#	Størrelse / Size	Kapacitet / Capacity, mm.	Emb. / Quantity
HICT600/5C	24" – 600mm	1,5 – 2,5 – 3,0 – 4,0 – 5,0	1

**Trådnæt Klipper**

Art.nr. / Art.#	Størrelse / Size	Kapacitet / Capacity	Emb. / Quantity
HIRCA800	33" – 800mm	ø10mm	1

Wire mesh cutter**Kæbesæt / Spare jaw, for HIRCA800**

Art.nr. / Art.#	Emb. / Quantity
HIRCAC800	1

**KT37 EI- og karrosserimejsel**

Størrelse (LxBxH): 235 x 26 x 7mm.
CR - MO - V stål.

Art.nr.	Emb.
KM23500	10

KT37 Cold chisel

Size (LxWxH): 235 x 26 x 7mm.
CR - MO - V steel.

Art.#	Quantity
KM23500	10



Alle sakse og tænger er udført i HRC 58-60 kvalitet, hvor intet andet er anført.
Alle pladesakse kan klippe V2A chrom-nikkel plade DIN 4301.

All shears and pliers are HRC 58-60 quality unless otherwise stated. All sheet metal shears can cut V2A chrome-nickel sheet DIN 4301.

Kiesel Arbejds- og skræddersaks

Med sortlakeret greb.

Art.nr.	Størrelse	Emb.
KI570200	8" – 200mm	1
KI570225	9" – 225mm	1
KI570250	10" – 250mm	1
KI570300	12" – 300mm	1

Kiesel Work and tailor scissor

With black painted grip.

Art.#	Size	Quantity
KI570200	8" – 200mm	1
KI570225	9" – 225mm	1
KI570250	10" – 250mm	1
KI570300	12" – 300mm	1



Kiesel Combisaks

Klip i alt saks (rustfri udførelse).

Art.nr.	Størrelse	Emb.
KI500	140mm med låsepal	1
KI501	190mm med låsepal	1

Kiesel Combination scissor

For cutting in many materials.
Made of stainless steel.

Art.#	Size	Quantity
KI500	140mm with lock tab	1
KI501	190mm with lock tab	1



KI500



KI501

Kiesel Pakningssaks i fornicket udførelse

Art.nr.	Størrelse	Emb.
KI573180	180mm	1

Kiesel Gasketed scissor, nickel-plated

Art.#	Size	Quantity
KI573180	180mm	1



**Hængelåse
Containerlåse
Dørlukker**

**Padlocks
Container locks
Door closer**



**Hængelåse – Låse systemer
Padlocks – Padlocks systems**

159

**Containerlåse – Dørpumpe
Container locks – Door closer**

161

CISA messing præcisions-hængelåse med forniklet carbon-nitrogenhærdet stålbojle, der holdes fastlåst af en patenteret dobbelt bøjle (dog ikke 20 og 25 mm).

CISA original brass padlock with nickel-plated carbonitrided steel shackle kept locked by a shackle double-locking system (20 and 25 mm excluded).

CISA 22010 Standard

Art.nr.		Emb.
CI22010.20	20mm, 2 nøgler pr. lås	12
CI22010.25	25mm, 2 nøgler pr. lås	12
CI22010.30	30mm, 2 nøgler pr. lås	12
CI22010.40	40mm, 2 nøgler pr. lås	12
CI22010.50	50mm, 2 nøgler pr. lås	6
CI1430	Nøgleemner for 30 mm	1
CI1410	Nøgleemner for 40 mm	1
CI1310	Nøgleemner for 50 & 60 mm	1
CI1430T	Tilfilede, for 30 mm	1
CI1410T	Tilfilede, for 40 mm	1
CI1310T	Tilfilede, for 50 & 60 mm	1

CISA 22010 Standard

Art.#		Quantity
CI22010.20	20mm, 2 keys per lock	12
CI22010.25	25mm, 2 keys per lock	12
CI22010.30	30mm, 2 keys per lock	12
CI22010.40	40mm, 2 keys per lock	12
CI22010.50	50mm, 2 keys per lock	6
CI1430	Key blanks for 30 mm	1
CI1410	Key blanks for 40 mm	1
CI1310	Key blanks for 50 & 60 mm	1
CI1430T	Customized, 30 mm	1
CI1410T	Customized, 40 mm	1
CI1310T	Customized, 50 & 60 mm	1




CISA 22010 KA Enslukkende

Art.nr.		Emb.
CI22010.40KA	40mm, 2 nøgler pr. lås	12
CI22010.50KA	50mm, 2 nøgler pr. lås	6

CISA 22010 KA Keyed alike

Art.#		Quantity
CI22010.40KA	40mm, 2 keys per lock	12
CI22010.50KA	50mm, 2 keys per lock	6



CISA 22010 MK Hovednøglesystem

Sæt af 6-12-24 låse.

Art.nr.		Emb.
CI22010.40MK	40mm, 2 nøgler pr. lås	12
CI22010.50MK	50mm, 2 nøgler pr. lås	6
CI1410MK	MK hovednøgler (2 stk.)	1

CISA 22010 MK Master key system

Sets of 6-12-24 locks.

Art.#		Quantity
CI22010.40MK	40mm, 2 keys per lock	12
CI22010.50MK	50mm, 2 keys per lock	6
CI1410MK	MK master keys (2 pcs.)	1


Type	A	D	L	S
22010-20	20	3,5	13	12,5
25	25	4,5	15	12,5
30	30	5	17	14,5
40	40	6	23	16,5
50	50	8	27,5	17,5
60	60	10	37,5	20

CISA 22011 Med forlænget bøjle

Art.nr.		Emb.
CI22011.40	40mm, 2 nøgler pr. lås	12
CI22011.50	50mm, 2 nøgler pr. lås	6
CI1410	Nøgleemner for 40 mm	1
CI1310	Nøgleemner for 50 mm	1
CI1410T	Tilfilede, for 40 mm	1
CI1310T	Tilfilede, for 50 mm	1

CISA 22011 With extended shank

Art.#		Quantity
CI22011.40	40mm, 2 keys per lock	12
CI22011.50	50mm, 2 keys per lock	6
CI1410	Key blanks for 40 mm	1
CI1310	Key blanks for 50 mm	1
CI1410T	Customized, 40 mm	1
CI1310T	Customized, 50 mm	1



Type	A	D	L	S
22011-40	40	6	40	16,5
50	50	8	80	17,5

CISA 21010 hængelåse, messing

Art.nr.		Emb.
CI21010.20	20mm, 2 nøgler pr. lås	12
CI21010.30	30mm, 2 nøgler pr. lås	12
CI21010.40	40mm, 2 nøgler pr. lås	12
CI21010.50	50mm, 2 nøgler pr. lås	6
CI21010.60	60mm, 2 nøgler pr. lås	6
CI1430	Nøgleemner for 30 mm	1
CI1410	Nøgleemner for 40 mm	1
CI1310	Nøgleemner for 50 mm	1
CI1430T	Tilfilede, for 30 mm	1
CI1410T	Tilfilede, for 40 mm	1
CI1310T	Tilfilede, for 50 & 60 mm	1

CISA 21010 padlocks, brass

Art.#		Quantity
CI21010.20	20mm, 2 keys per lock	12
CI21010.30	30mm, 2 keys per lock	12
CI21010.40	40mm, 2 keys per lock	12
CI21010.50	50mm, 2 keys per lock	6
CI21010.60	60mm, 2 keys per lock	6
CI1430	Key blanks for 30 mm	1
CI1410	Key blanks for 40 mm	1
CI1310	Key blanks for 50 mm	1
CI1430T	Customized, 30 mm	1
CI1410T	Customized, 40 mm	1
CI1310T	Customized, 50 & 60 mm	1

**CISA 21010 KA Enslukkende**

Art.nr.		Emb.
CI21010.20KA	20mm, 2 nøgler pr. lås	12
CI21010.30KA	30mm, 2 nøgler pr. lås	12
CI21010.40KA	40mm, 2 nøgler pr. lås	12
CI21010.50KA	50mm, 2 nøgler pr. lås	6

CISA 21010 KA Keyed alike

Art.#		Quantity
CI21010.20KA	20mm, 2 keys per lock	12
CI21010.30KA	30mm, 2 keys per lock	12
CI21010.40KA	40mm, 2 keys per lock	12
CI21010.50KA	50mm, 2 keys per lock	6

Type	A	D	L	S
21010-20	20	3,5	11,3	10,4
30	30	4,7	16,9	13,8
40	40	6,3	22,4	13,8
50	50	7,9	28,7	17
60	60	9,5	34,7	17,2

CISA Marine hængelåse med højglans forchromet messinghus, hærdet rustfri stålbojle og rustfri stålfilede. Perfekt til marinebrug og andre aggressive miljøer. Meget modstandsdygtig overfor rust.

CISA Marine padlocks with polished chrome body, tempered stainless steel shackle, stainless steel springs. Perfect for marine use and in aggressive environments. Exceptional resistance to corrosion.

CISA 26020 Marine hængelåse

Art.nr.		Emb.
CI26020.30	30mm, 2 nøgler pr. lås	12
CI26020.40	40mm, 2 nøgler pr. lås	12
CI26020.50	50mm, 2 nøgler pr. lås	6
CI26020.60	60mm, 2 nøgler pr. lås	6
CI1430	Nøgleemner for 30 mm	1
CI1410	Nøgleemner for 40 mm	1
CI401	Nøgleemner for 50 & 60 mm	1
CI1430T	Tilfilede, for 30 mm	1
CI1410T	Tilfilede, for 40 mm	1
CI401T	Tilfilede, for 50 & 60 mm	1

CISA 26020 Marine padlock


Art.#		Quantity
CI26020.30	30mm, 2 keys per lock	12
CI26020.40	40mm, 2 keys per lock	12
CI26020.50	50mm, 2 keys per lock	6
CI26020.60	60mm, 2 keys per lock	6
CI1430	Key blanks for 30 mm	1
CI1410	Key blanks for 40 mm	1
CI401	Key blanks for 50 & 60 mm	1
CI1430T	Customized, 30 mm	1
CI1410T	Customized, 40 mm	1
CI401T	Customized, 50 & 60 mm	1

**CISA 26020 KA Enslukkende**

Art.nr.		Emb.
CI26020.50KA	50mm, 2 nøgler pr. lås	6

CISA 26020 KA Keyed alike

Art.#		Quantity
CI26020.50KA	50mm, 2 keys per lock	6



Type	A	D	L	S
26020-30	30	5	17	14,5
40	40	6	23	16,5
50	50	8	27,5	17,5
60	60	10	37,5	20

CISA 26021 Med forlænget bøjle

Art.nr.		Emb.
CI26021.40	40mm, 2 nøgler pr. lås	12
CI1410	Nøgleemner	1
CI1410T	Tilfilede nøgleemner	1

CISA 26021 With extended shackle

Art.#		Quantity
CI26021.40	40mm, 2 keys per lock	12
CI1410	Key blanks	1
CI1410T	Customized keys	1



Type	A	D	L	S
26021-40	40	6	40	16,5

CISA Containerlås med special nøgleprofil

Hus af "carbon-nitrogen" hærdet stål. Hærdet stålbolt af "nickel-chrome carbon-nitrogen". Låsebolt holdes fastlåst af hærdede rustfri stål kugler. Cylinderen kan omlægges, høj dirke- og udboringssikkerhed.

CISA 28550 Containerlås

Art.nr.		Emb.
CI28550.66	66 mm, 2 nøgler pr. lås	6
CI28550.75	75 mm, 2 nøgler pr. lås	6
CI28550.84	84 mm, 2 nøgler pr. lås	6

CI401	Nøgleemner	1
CI401T	Tilfilede nøgleemner	1

CISA 28550 KA Enslukkende

Art.nr.		Emb.
CI28550.75KA	75 mm, 2 nøgler pr. lås	6
CI28550.84KA	84 mm, 2 nøgler pr. lås	6

CI401	Nøgleemner	1
CI401T	Tilfilede nøgleemner	1

CISA Container lock with special key profile

Carbon-nitrogen tempered steel housing. Tempered steel nickel-chrome carbon-nitrogen bolt. Lock bolt kept locked by tempered stainless steel balls. Cylinder can be reversed, high resistance to picking and drilling.

CISA 28550 Container lock


Art.#		Quantity
CI28550.66	66 mm, 2 keys per lock	6
CI28550.75	75 mm, 2 keys per lock	6
CI28550.84	84 mm, 2 keys per lock	6

CI401	Key blanks	1
CI401T	Customized keys	1

CISA 26020 KA, Keyed alike

Art.#		Quantity
CI28550.75KA	75 mm, 2 keys per lock	6
CI28550.84KA	84 mm, 2 keys per lock	6

CI401	Key blanks	1
CI401T	Customized keys	1



Type	A	B	D	L	S
28550-66	66	20	10	11	25
67	66	18	14	17,5	28
75	75	27	12	13,5	28
84	84	36	12	17,5	28

CISA dørpumpe

med 3 størrelser indbygget i én.
UNI EN 1154 / klasse 2-4.
Dørpumpen er indstillelig til en dørbredde på max. 1100mm og max. 80 kg.
Justerbar lukkehastighed 180° til 15°.
Justerbar sluttryk 15° til 0°.
Åbningsvinkel max. 180°.
Aluminiumshus.

CISA door closer



3 sizes in one. UNI EN 1154 / class 2-4.
The door closer can be adjusted to a door width of max. 1100mm and max. 80 kg.
Adjustable closing speed 180° to 15°.
Adjustable final slam 15° to 0°.
Opening angle max. 180°.
Aluminium housing

**CISA 714 dørpumpe**

Art.nr.		Emb.
CI71410	Med kåbe og standard arm	1

CISA 714 door closer

Art.#		Quantity
CI71410	With cover and standard arm	1

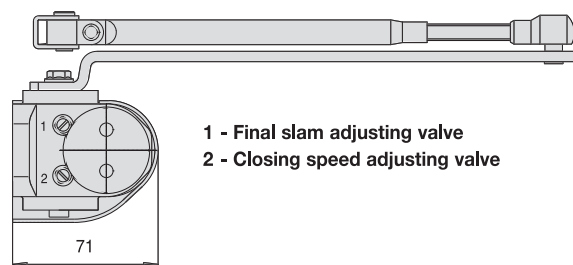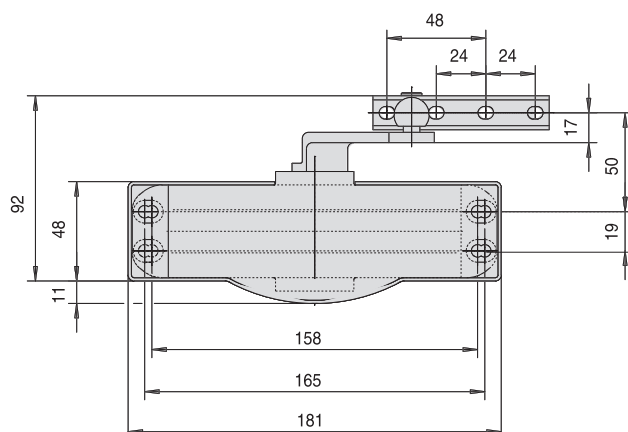

- 1 - Final slam adjusting valve
- 2 - Closing speed adjusting valve

A series of horizontal lines for writing, spanning the width of the page.

KABI A/S

Kokkedalsvej 29
DK-2970 Hoersholm
Denmark

CVR / VAT-nr: DK 46 80 98 15

E-mail: kabi@kabi.dk

Phone: +45 4576 0242

WWW.KABI.DK



KABI A/S
Kokkedalsvej 29
DK-2970 Hoersholm, Denmark
Phone: +45 4576 0242
kabi@kabi.dk
www.kabi.dk